

Multi-Section Outdoor LED Scoreboards

Installation, Maintenance, and Specifications Manual

ED13109

All Sport® is a registered trademark of Daktronics, Inc.

BA-1518-11	FB-1424-11	FB-1630L-11	FB-2003-11	SO-1624-11
BA-1524-11	FB-1430-11	FB-1730-11	FB-2004-11	SO-1830-11
BA-2007-11	FB-1524-11	FB-1830-11	MS-2009-11	SO-1830L-11
BA-3718-11	FB-1530-11	FB-1830L-11	MS-2118-11	SO-1930-11
BA-3724-11	FB-1624-11	FB-2001-11	MS-2918-11	
CR-2001-11	FB-1630-11	FB-2002-11	SO-1424-11	

ED13109
Product 1192
Rev 6 – 07 November 2002

Copyright © 2002 Daktronics, Inc.

All rights reserved. While every precaution has been taken in the preparation of this manual, the publisher assumes no responsibility for errors or omissions. No part of this book covered by the copyrights hereon may be reproduced or copied in any form or by any means – graphic, electronic, or mechanical, including photocopying, taping, or information storage and retrieval systems – without written permission of the publisher.

***Note:** Please fill in the information below for your display, and use it as a reference when calling Daktronics for assistance.*

Scoreboard Serial No. _____

Scoreboard Model No. _____

Date Installed _____



PO Box 5128 331 32nd Ave Brookings SD 57006
Tel 605-697-4036 or 877-605-1115 Fax 605-697-4444
www.daktronics.com e-mail: helpdesk@daktronics.com

Table of Contents

Section 1:	Introduction.....	1-1
1.1	How To Use This Manual.....	1-1
1.2	Daktronics Nomenclature.....	1-2
1.3	Manual Overview.....	1-3
1.4	Product Overview.....	1-3
1.5	Model Names 118.....	1-4
1.6	Product Safety Approval.....	1-4
Section 2:	Model Identification.....	2-1
Section 3:	Specifications.....	3-1
3.1	Multi-Section Scoreboards.....	3-2
Section 4:	Component Locations.....	4-1
Section 5:	Schematics.....	5-1
Section 6:	Mechanical Installation.....	6-1
6.1	Scoreboard Protective Devices.....	6-1
6.2	Footings and Beams.....	6-1
6.3	Lifting the Scoreboard or Optional One- or Two-Line Message Center.....	6-4
6.4	Scoreboard Mounting.....	6-5
6.5	Ad Panel Mounting.....	6-5
6.6	Optional One- or Two-Line Message Center Mounting.....	6-6
Section 7:	Electrical Installation.....	7-1
7.1	Power.....	7-1
	Grounding.....	7-2
	Power Installation.....	7-2
7.2	Power and Signal Connection.....	7-3
	Interconnect Panel Connections.....	7-4
	Multiple Driver Connections.....	7-4
Section 8:	Scoreboard Maintenance and Troubleshooting.....	8-1
8.1	Cabinet Specifications.....	8-1
8.2	Component Location and Access.....	8-1
	Replacing a Digit.....	8-2
	Replacing a Digit Segment.....	8-3
	Replacing a Breakout Board.....	8-3
	Replacing a Driver.....	8-4

8.3	Schematics	8-4
8.4	LED Drivers.....	8-4
8.5	Segmentation and Digit Designation	8-5
8.6	Troubleshooting.....	8-5
8.7	Lightning Protection	8-6
8.8	Replacement Parts	8-6
8.9	Daktronics Exchange and Repair and Return Programs.....	8-7
Section 9:	Team Name Message Center Maintenance	9-1
9.1	Team Name Message Center System Overview.....	9-1
9.2	Maintenance and Troubleshooting Overview.....	9-1
9.3	Signal Summary.....	9-2
9.4	Power Summary.....	9-2
9.5	Service and Diagnostics.....	9-2
	TNMC Current Loop Interface Card.....	9-3
	TNMC Controller.....	9-3
	Modules and Drivers	9-5
	Power Supplies.....	9-6
	Weatherstripping.....	9-7
9.6	TNMC Display Maintenance.....	9-7
9.7	Troubleshooting.....	9-7
9.8	Initialization Information at Startup	9-8
9.9	Replacement Parts List	9-8
Section 10:	Scoreboard Options	10-1
10.1	Football Scoreboard Accessories.....	10-1
10.2	Captions for Other Sports	10-1
	Installing and Changing Captions	10-1
10.3	Trumpet Horn	10-2
	120 V Trumpet Horn Installation (Internally Mounted)	10-2
	DC Trumpet Horn Installation (Externally Mounted)	10-3
10.4	Radio Control.....	10-4
Appendix A:	Reference Drawings	A-1
Appendix B:	Eyebolts.....	B-1

Section 1: Introduction

1.1 How To Use This Manual

This manual explains the installation of *Daktronics Multi-Section Outdoor LED Scoreboards* and provides details for display maintenance. For other questions regarding the safety, installation, operation, or service of these systems, contact Daktronics. Customer Service Help Desk telephone numbers are listed on the cover page of this manual. This manual would be referred to as ED13109.

Important Safeguards:

1. Read and understand these instructions before installing the scoreboard.
2. Do not drop the control console or allow it to get wet.
3. Properly ground the scoreboard with a ground rod at the scoreboard location.
4. **Disconnect power when the scoreboard is not in use.**
5. **Disconnect power when servicing the scoreboard.**
6. Do not modify the scoreboard structure or attach any panels or coverings to the scoreboard without the express written consent of Daktronics, Inc.

The box at right, **Figure 1**, illustrates the Daktronics drawing numbering system. Daktronics identifies individual drawings with a number (7087-P08A-69945 in the example), which is located in the bottom right corner of each drawing. This manual refers to drawings by the last set of digits in their ID number as well as the letter preceding them. The example would be **Drawing A-69945**.

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: BASKETBALL	
TITLE: SEGMENTATION, 7 SEG BAR DIGIT	
DES. BY: BPETERSON DRAWN BY: TNELSON DATE: 8 JUL 02	
APPR. BY: AVB	7087-P08A-69945
SCALE: 1 = 4	

Figure 1: Daktronics Drawing Label

Reference drawings in this manual are grouped and inserted in alphanumeric order in the **Appendix**.

Listed below are a number of drawing types commonly used by Daktronics, along with the information each is likely to provide.

- **System Riser Diagrams:** overall system layout from control room to display, power, and phase requirements.
- **Shop Drawings:** fan locations, transformer locations, mounting information, power and signal entrance points, and access method (front or rear).
- **Schematics:** power wiring, signal wiring, panelboard or power termination panel assignments, signal termination panel assignments, and transformer assignments.
- **Final Assembly:** component locations, part numbers, display dimensions, and assembly/disassembly instructions.

All references to drawing numbers, appendices, figures, or other manuals are presented in **bold** typeface, as in this example: “Refer to **Drawing A-114667** for the location of the driver enclosure.” Additionally, any drawings referenced within a particular subsection are listed at the beginning of that subsection in the following manner:

Reference Drawing:

Shop Drawing; 16 High 2 ½" Small Matrix **Drawing A-114667**

Daktronics identifies manuals by their engineering document (ED) number, which is located on the cover page of the manual. For example, this manual would be referred to as **ED13109**.

The serial and model numbers of a Daktronics scoreboard can be found on the ID label on the display. The label will be similar to the one shown in **Figure 2**. When calling Daktronics Customer Service, please have this information available to ensure that your request is serviced as quickly as possible.

For future reference, note your scoreboard model number, serial number, and installation date on the front page of this manual.

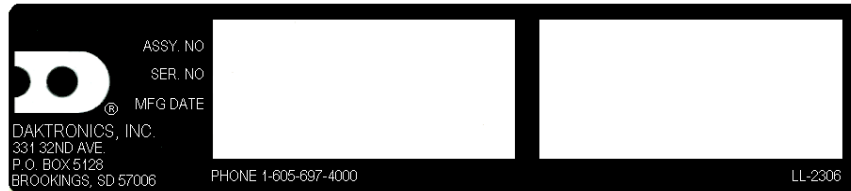


Figure 2: Scoreboard Label

Daktronics displays are built for long life and require little maintenance. However, from time to time, certain display components will have to be replaced. The Replacement Parts List in **Section 8** provides the names and part numbers of components that may require replacement during the life of this display.

Following the Replacement Parts List in **Section 8** is an explanation of Daktronics exchange and replacement programs. Refer to these instructions if you must replace or repair any display component.

1.2 Daktronics Nomenclature

To fully understand some Daktronics drawings, such as schematics, it is necessary to know how various components are labeled in those drawings. You will find this information useful when trying to communicate maintenance or troubleshooting efforts.

The label "A" on a drawing item typically denotes an assembly. An assembly can be a single circuit board or a collection of components that function together, usually mounted on a single plate or in a single enclosure.

In addition, the following labeling formats might be found on various Daktronics drawings:

- "TB _" denotes a termination block for power or signal cable.
- "F _" denotes a fuse.
- "E _" denotes a grounding point.
- "J _" denotes a power or signal jack.
- "P _" denotes a power or signal plug for the opposite jack.

Finally, Daktronics part numbers are commonly found on drawings. Those part numbers can be used when requesting replacement parts from Daktronics Customer Service. Take note of the following part number formats. (Not all possible formats are listed here.)

- "0P-_____-_____" denotes an individual circuit board, such as a driver board.
- "0A-_____-_____" denotes an assembly, such as a circuit board and the plate or bracket to which it is mounted. A collection of circuit boards working as a single unit may also carry an assembly label.
- "W-_____" denotes a wire or cable. Cables may also carry the assembly numbering format in certain circumstances. This is especially true of ribbon cables.
- "F-_____" denotes a fuse.
- "T-_____" denotes a transformer.
- "PR-_____-_____" denotes a specially ordered part.
- "M-_____" denotes a metal part, and "0M-_____" typically denotes a fabricated metal assembly.

1.3 Manual Overview

This manual details outdoor multi-section scoreboards with LED digits and characters. It is divided into the following sections:

- Section 1:** Contains an overview of the product, product safety information, and labeling and numbering descriptions.
- Section 2:** Lists the drawings needed to determine scoreboard model numbers.
- Section 3:** Contains tables that show all of the mechanical specifications, circuit specifications and maximum power requirements for each model.
- Section 4:** Lists drawings needed to determine the location of scoreboard components.
- Section 5:** Lists the electrical schematic drawings for each model.
- Section 6:** Contains information needed to perform the mechanical installation for each model.
- Section 7:** Contains electrical installation information for each model.
- Section 8:** Contains the information needed to service the scoreboards.
- Section 9:** Contains service and troubleshooting information for team name message centers.
- Section 10:** Contains descriptions and installation instructions for scoreboard options.
- Appendix:** Contains all drawings referenced in this manual and additional miscellaneous documents.

1.4 Product Overview

Daktronics outdoor LED scoreboards are part of a family of scoring and timing displays designed to offer easy installation, readability, and reliability. Microprocessor control assures consistent operation and accuracy.

Featuring large, highly visible PanaView™ digits 15, 18, 24, and 30" tall, the boards use light emitting diodes to power the scoreboard display. (Light emitting diodes, or LEDs, are tiny, solid-state components that use a semiconductor to transform electrical current into light; they are high-intensity, low-energy lighting units.)

Because of their LED technology, the scoreboards consume little power, some barely more than a household lamp. Power usage for displays in this series ranges from 40 W to a maximum of 1000 W.

Scoreboards in this series use red-orange LEDs for optimum outdoor visibility.

The outdoor LED displays are modular in construction, typically with a top and a bottom section, but some are comprised of as many as four different sections. The units are shipped separately and joined at installation. Unpowered sections, connected to the internal power and signal enclosure with

cabling, are referred to as "slave" sections, while those housing the electronic control components are "masters."

Cabinets for the displays, available in more than 250 colors, are constructed of heavy-gauge aluminum. Digit and indicator faceplates are black, and they are set directly into the scoreboard surface. Permanent captions and optional striping are white vinyl.

Mounting weights and dimensions for each model are listed in **Section 3** of this manual.

☛ **Note:** Drawings and text in this manual refer to *team name message centers*, or TNMCs. Team name message centers are scoreboard-mounted, matrix LED units which electronically display home and guest team names. TNMCs are available as a standard new scoreboard option with many of the models in this series, and the message centers are also available for retrofit on existing scoreboards. **Section 9** of this manual offers step-by-step information on TNMC maintenance and troubleshooting.

The outdoor LED scoreboards have been designed for use with an All Sport® 3000 Series control console; displays equipped with team name message centers require an All Sport 5000 Series controller. Both consoles use All Sport keyboard overlays (sport inserts) for game control, and the boards operate without modification on All Sport 5000 signal protocol. Refer to the following controller manuals for operating instructions:

- **ED12126:** All Sport 3000 Series Control Console Operation Manual
- **ED11976:** All Sport 5000 Series Control Console Operation Manual

1.5 Model Names

Daktronics scoreboards are differentiated by their model numbers: *BA-1518*, for example, designates a specific baseball scoreboard. The two-letter prefixes for scoreboards in this manual include the following: **BA** – baseball; **CR** – cricket; **FB** – football; **MS** – multisport; and **SO** – soccer.

In the outdoor LED scoreboard series, typically the first number or first two numbers following the prefix simply identify the scoreboard line, while the second set of numbers often refers to digit size. With the *BA-1518* scoreboard, "15" identifies the product line, and "18" signifies that the board's primary digits are a nominal 18" tall. Not all scoreboard lines follow this identification feature, however, and the three or four numbers following the prefix may simply identify a specific model.

Most Daktronics scoreboards also carry a two-number suffix that refers to indoor-outdoor status and power supply: *-9* and *-10* are indoor displays, 120 V and 230 V respectively; and *-11* and *-12* are outdoor scoreboards, 120 V and 230 V. All of the LED scoreboards in this manual carry the *-11* suffix, signifying that they have been designed and manufactured for outdoor use and have a 120 V AC power requirement. Models that operate with 230 V power are also available.

1.6 Product Safety Approval

Daktronics outdoor scoreboards are ETL listed, tested to CSA standards and CE labeled for outdoor use. Contact Daktronics with any questions regarding the testing procedures.

Section 2: Model Identification

Use the following drawings to determine your scoreboard's model number. The drawings are listed here in alphabetical order by scoreboard model line; they are located in **Appendix A: Reference Drawings**, where they are inserted in alphanumeric order by drawing number. Individual scoreboard drawings may also be found in the **Appendix**.

Reference Drawings:

Multi-Section Football Scoreboards	Drawing A-42148
Multi-Section Football Scoreboards w/TNMC	Drawing A-84233
Multi-Section Soccer Scoreboards	Drawing A-98161
Multi-Section Baseball Scoreboards	Drawing A-126086
Multi-Section Baseball Scoreboards, w/TNMC	Drawing A-126362
Multi-Section Soccer Scoreboards w/TNMC.....	Drawing A-128172
Multi-Section Multi-sport Scoreboards	Drawing A-128203

Section 3: Specifications

The table on the following pages shows all of the mechanical specifications, circuit specifications, and maximum power requirements for each model in this manual. Models are listed in alphanumeric order.

3.1 Multi-Section Scoreboards

Note: Signal wires must be a minimum of 22 AWG with shield. Daktronics recommends using W-1234

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
BA-1518-11	2 Total	H8'-0", W16'-0", D6" (2438 mm, 4877 mm, 152 mm)	400 lb 182 kg (845 lb) (383 kg)	<ul style="list-style-type: none"> ■ Indicators 2" (51 mm) ■ All Others 18" (457 mm) 	250 W	120 V AC	2.1 A	A1 63
	Top	H3'-0", W16'-0", D6" (914 mm, 4877 mm, 152 mm)						
	Bottom	H5'-0", W16'-0", D6" (1524 mm, 4877 mm, 152 mm)						
BA-1518-11 w/TNMC	2 Total	H8'-0", W16'-0", D6" (2438 mm, 4877 mm, 152 mm)	480 lb 218 kg (912 lb) (414 kg)	<ul style="list-style-type: none"> ■ Indicators 2" (51 mm) ■ All Others 18" (457 mm) 	550 W	120/240 V AC	4.6 A	A1 63
	Top	H3'-0", W16'-0", D6" (914 mm, 4877 mm, 152 mm)						
	Bottom	H5'-0", W16'-0", D6" (1524 mm, 4877 mm, 152 mm)						

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
BA-1524-11	2 Total	H9'-0", W16'-0", D6" (2743 mm, 4877 mm, 152 mm)	480 lb 218 kg	<ul style="list-style-type: none"> ■ Indicators 2" (51 mm) ■ Runs, Hits, and Errors 18" (457 mm) ■ All Others 24" (610 mm) 	300 W	120 V AC	3.0 A	A1 63
	Top	H4'-0", W16'-0", D6" (2743 mm, 4877 mm, 152 mm)	(912 lb) (414 kg)					
	Bottom	H5'-0", W16'-0", D6" (1524 mm, 4877 mm, 152 mm)						
BA-1524-11 w/TNMC	2 Total	H9'-4", W16'-0", D6" (2845 mm, 4877 mm, 152 mm)	560 lb 254 kg	<ul style="list-style-type: none"> ■ Innings, Runs, Hits, and Errors 18" (457 mm) ■ All Others 24" (610 mm) 	920 W	120/240 V AC	7.7 A	A1 63
	Top	H4'-0", W16'-0", D6" (1219 mm, 4877 mm, 152 mm)	(1064 lb) (483 lb)					
	Bottom	H5'-0", W16'-0", D6" (1524 mm, 4877mm, 152 mm)						

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
BA-2007-11 w/TNMC	4 Total	H9'-4", W36'-0", D6" (2845 mm, 10973 mm, 152 mm)	840 lb 381 kg	<ul style="list-style-type: none"> ■ Innings, Runs, Hits, and Errors 18" (457 mm) ■ All Others 24" (610 mm) 	920 W	120/240 V AC	7.7 A	A1 64
	2 Top	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)	2 Crates (700 lb) (318 kg)					A2 65
	2 Bottom	H4'-0", W14'-0", D6" (1219 mm, 4267 mm, 152 mm)	(1125 lb) (510 kg)					A3 66 A4 11
BA-3718-11	4 Total	H7'-0", W28'-0", D6" (2134 mm, 8534 mm, 152 mm)	640 lb 291 kg	<ul style="list-style-type: none"> ■ Innings, Runs, Hits, and Errors 15" 9381 mm) ■ All Others 18" (457 mm) 	650 W	120 V AC	6.0 A	A1 64
	2 Top	H3'-0", W14'-0", D6" (2134 mm, 8534 mm, 152 mm)	2 Crates (825 lb) (374 kg)					A2 65
	2 Bottom	H4'-0", W14'-0", D6" (1219 mm, 4267 mm, 152 mm)	(525 lb) (238 kg)					A3 66

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
BA-3718-11 w/TNMC	4 Total	H7'-0", W28'-0", D6" (2134 mm, 8534 mm, 152 mm)	720 lb 327 kg	<ul style="list-style-type: none"> ■ Innings, Runs, Hits, and Errors 18" (457 mm) ■ All Others 24" (610 mm) 	950 W	120/240 V AC	7.9 A	A1 64
	2 Top	H3'-0", W14'-0", D6" (914 mm, 8534 mm, 152 mm)	2 Crates (746 lb) (338 kg)					A2 65
	2 Bottom	H4'-0", W14'-0", D6" (1219 mm, 4267 mm, 152 mm)	(468 lb) (212 kg)					A3 66
BA-3724-11	4 Total	H9'-4", W36'-0", D6" (2845 mm, 10973 mm, 152 mm)	840 lb 381 kg	<ul style="list-style-type: none"> ■ Innings, Runs, Hits, and Errors 18" (457 mm) ■ All Others 24" (610 mm) 	870 W	120 V AC	8.0 A	A1 64
	2 Top	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)	2 Crates (700 lb) (318 kg)					A2 65
	2 Bottom	H5'-4", W18'-0", D6" (1626 mm, 5486 mm, 152 mm)	(1125 lb) (510 kg)					A3 66

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
BA-3724-11 w/TNMC	4 Total	H9'-4", W36'-0", D6" (2845 mm, 10973 mm, 152 mm)	960 lb 435 kg	<ul style="list-style-type: none"> ■ Innings, Runs, Hits, and Errors 18" (457 mm) ■ All Others 24" (610 mm) 	995 W	120/240 V AC	8.0 A	A1 64
	2 Top	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)	2 Crates (856 lb) (388 kg)					A2 65
	2 Bottom	H5'-4", W18'-0", D6" (1626 mm, 5486 mm, 152 mm)	(1112 lb) (504 kg)					A3 66
CR-2001-11	2 Total	H10'-0", W11'-4", D6" (3048 mm, 3454 mm, 152 mm)	300 lb 136 kg	<ul style="list-style-type: none"> ■ All Digits 15" (381 mm) 	300 W	120/240 V AC	2.5 A 1.3 A	A1 11
	Top and Bottom	H5'-0", W11'-4", D6" (1524 mm, 3454 mm, 152 mm)	(480 lb) (218 kg)					
FB-1424-11	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	400 lb 182 kg	<ul style="list-style-type: none"> ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	450 W	120/240 V AC	3.7 A	A1 12
	Top and Bottom	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)	(805 lb) (365 kg)					

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB-1424-11 w/TNMC	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	400 lb 182 kg (805 lb) (365 kg)	<ul style="list-style-type: none"> ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	540 W	120/240 V AC	4.5 A	A1 12
	Top and Bottom	H4'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)						
FB-1430-11	2 Total	H8'-0", W25'-0", D6" (1219 mm, 5486 mm, 152 mm)	560 lb 254 kg (1068 lb) (484 kg)	<ul style="list-style-type: none"> ■ Clock 30" (457 mm) ■ All Others 24" (610 mm) ■ Indicators 8" (203 mm) 	360 W	120 V AC	3.0 A	A1 12
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)						
FB-1430-11 w/TNMC	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	760 lb 345 kg (1444 lb) (655 kg)	<ul style="list-style-type: none"> ■ Clock 30" (457 mm) ■ All Others 24" (610 mm) ■ Indicators 8" (203 mm) 	660 W	120/240 V AC	5.5 A	A1 12
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)						
FB-1524-11	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	400 lb 182 kg (805 lb) (365 kg)	<ul style="list-style-type: none"> ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	360 W	120/240 V AC	3.0 A	A1 12
	Top and Bottom	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)						

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB-1524-11 w/TNMC	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	520 lb 236 kg	<ul style="list-style-type: none"> ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	560 W	120/240 V AC	4.7 A	A1 12
	Top and Bottom	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)	(844 lb) (383 kg)					
FB-1530-11	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	580 lb 263 kg	<ul style="list-style-type: none"> ■ Clock 30" (457 mm) ■ All Others 24" (610 mm) ■ Indicators 8" (203 mm) 	428 W	120/240 V AC	3.6 A	A1 12
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)	(1102 lb) (500 kg)					
FB-1530-11 w/TNMC	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	700 lb 318 kg	<ul style="list-style-type: none"> ■ Clock 30" (457 mm) ■ All Others 24" (610 mm) ■ Indicators 8" (203 mm) 	690 W	120/240 V AC	6.0 A	A1 12
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)	(1330 lb) (603 kg)					
FB-1624-11	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	440 lb 200 kg	<ul style="list-style-type: none"> ■ All Things 24" (610 mm) ■ Indicators 8" (203 mm) 	385 W	120/240 V AC	3.2 A	A1 15 A2 16
	Top and Bottom	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)	(900 lb) (408 kg)					

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB1630-11	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	600 lb 272 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	395 W	120 V AC	3.3 A	A1 15 A2 16
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)	(1140 lb) (517 kg)					
FB-1630-11 w/TNMC	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	620 lb 281 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	695 W	120/240 V AC	5.8 A	A1 15 A2 16
	Top and Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)	(1178 lb) (534 kg)					
FB-1630L-11	2 Total	H8'-0", W32'-0", D6" (2438 mm, 9754 mm, 152 mm)	720 lb 327 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	395 W	120/240 V AC	3.3 A	A1 15 A2 16
	Top and Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)	(1368 lb) (621 kg)					

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB-1630L-11 w/TNMC	2 Total	H8'-0", W32'-0", D6" (2438 mm, 9754 mm, 152 mm)	840 lb 381 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	695 W	120/240 V AC	5.8 A	A1 15 A2 16
	Top and Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)	(1596 lb) (724 kg)					
FB-1730-11	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	620 lb 281 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	400 W	120 V AC	3.3 A	A1 15 A2 16
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)	(1178 lb) (534 kg)					
FB-1730-11 w/TNMC	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	740 lb 336 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	725 W	120/240 V AC	6.0 A	A1 15 A2 16
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)	(1406 lb) (638 kg)					

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB-1830-11	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	640 lb 432 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	430 W	120/240 V AC	3.6 A	A1 15 A2 16
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)	(1550 lb) (703 kg)					
FB-1830-11 w/TNMC	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	760 lb 345 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	755 W	120/240 V AC	6.3 A	A1 15 A2 16
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)	(1444 lb) (655 kg)					
FB-1830L-11	2 Total	H8'-0", W32'-0", D6" (2438 mm, 9754 mm, 152 mm)	780 lb 354 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	450 W	120 V AC	3.8 A	A1 15 A2 16
	Top and Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)	(1482 lb) (672 kg)					

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB-1830L-11 w/TNMC	2 Total	H8'-0", W32'-0", D6" (2438 mm, 9754 mm, 152 mm)	900 lb 408 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	755 W	120/240 V AC	6.3 A	A1 15 A2 16
	Top and Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)	(1710 lb) (776 kg)					
FB-2001-11	2 Total	H10'-0", W32'-0", D6" (3048 mm, 9754 mm, 152 mm)	940 lb 426 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	455 W	120/240 or 120/208 V AC	3.8 A	A1 15 A2 16
	Top	H6'-0", W32'-0", D6" (1829 mm, 9754 mm, 152 mm)	(1786 lb) (810 kg)					
	Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)						
FB-2001-11 w/TNMC	2 Total	H10'-0", W32'-0", D6" (3048 mm, 9754 mm, 152 mm)	1060 lb 481 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	600 W	120 V AC	5 A	A1 15 A2 16
	Top	H6'-0", W32'-0", D6" (1829 mm, 9754 mm, 152 mm)	(2014 lb) (914 kg)					
	Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)						

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB-2002-11	2 Total	H8'-0", W20'-0", D6" (2438 mm, 6096 mm, 152 mm)	520 lb 236 kg	<ul style="list-style-type: none"> ■ TOL 15" (381 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	365 W	120/240 V AC	3.0 A	A1 15 A2 16
	Top and Bottom	H4'-0", W20'-0", D6" (1219 mm, 6096 mm, 152 mm)	(988 lb) (448 kg)					
FB-2003-11	2 Total	H8'-0", W20'-0", D6" (2438 mm, 6096 mm, 152 mm)	540 lb 245 kg	<ul style="list-style-type: none"> ■ TOL 15" (381 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	395 W	120/240 V AC	3.3 A	A1 15 A2 16
	Top and Bottom	H4'-0", W20'-0", D6" (1219 mm, 6096 mm, 152 mm)	(1026 lb) (445 kg)					
FB-2003-11 w/TNMC	2 Total	H8'-0", W20'-0", D6" (2438 mm, 6096 mm, 152 mm)	660 lb 299 kg	<ul style="list-style-type: none"> ■ TOL 15" (381 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	695 W	120/240 V AC	5.8 A	A1 15 A2 16
	Top and Bottom	H4'-0", W20'-0", D6" (1219 mm, 6096 mm, 152 mm)	(1254 lb) (569 kg)					

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
FB-2004-11	2 Total	H10'-0", W32'-0", D6" (3048 mm, 9754 mm, 152 mm)	880 lb 400 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	370 W	120/240 V AC	3.1 A	A1 15
	Top	H6'-0", W32'-0", D6" (3048 mm, 9754 mm, 152 mm)	(1672 lb) (758 kg)					A2 16
	Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)						
FB-2004-11 w/TNMC	2 Total	H10'-0", W32'-0", D6" (3048 mm, 9754 mm, 152 mm)	1030 lb 467 kg	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	600 W	120/240 V AC	5.0 A	A1 15
	Top	H6'-0", W32'-0", D6" (3048 mm, 9754 mm, 152 mm)	(1957 lb) (888 kg)					A2 16
	Bottom	H4'-0", W32'-0", D6" (1219 mm, 9754 mm, 152 mm)						
MS-2009-11	2 Total	H10'-0", W25'-0", D6" (3048 mm, 7620 mm, 152 mm)	480 lb 218 kg	<ul style="list-style-type: none"> ■ Clock, Score 24" (610 mm) ■ All Others 18" (457 mm) 	360 W	120 V AC	4.7 A	A1 71
	Top and Bottom	H5'-0", W25'-0", D6" (1524 mm, 3048 mm, 152 mm)	(912 lb) (414 kg)					A2 72

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
MS-2118-11	2 Total	H8'-0", W12'-0", D6" (2438 mm, 3658 mm, 152 mm)	275 lb 126 kg (390 lb) (176 kg)	<ul style="list-style-type: none"> ■ Clock, Score, Period 18" (457 mm) ■ Penalty 15" (381 mm) 	370 W	120 V AC	3.1 A	A1 71 A2 72
	Top and Bottom	H4'-0", W12'-0", D6" (2438 mm, 3658 mm, 152 mm)						
MS-2918-11	2 Total	H8'-0", W16'-0", D6" (2438 mm, 4877 mm, 152 mm)	480 lb 218 kg (680 lb) (309 kg)	<ul style="list-style-type: none"> ■ Clock, Score, Period 18" (457 mm) ■ Player, Penalty 15" (381 mm) 	600 W	120 V AC	5 A	A1 71 A2 72
	Top and Bottom	H4'-0", W16'-0", D6" (1219 mm, 4877 mm, 152 mm)						
SO-1424-11	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	400 lb 181 kg (805 lb) (365 kg)	<ul style="list-style-type: none"> ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	335 W	120/240 V AC	2.8 A	A1 15 A2 16
	Top and Bottom	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)						
SO-1424-11 w/TNMC	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	480 lb 218 kg (912 lb) (414 kg)	<ul style="list-style-type: none"> ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	635 W	120/240 V AC	5.3 A	A1 15 A2 16
	Top and Bottom	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)						

(Continued on next page)

(Continued from previous page)

Model	Number of Sections	Dimensions (Height, Width, Depth)	Weight Uncrated (Crated)	Digit Size	Maximum Wattage	Power	Amps per Line (Single Phase)	Driver Number and Address
SO-1624-11	2 Total	H8'-0", W18'-0", D6" (2438 mm, 5486 mm, 152 mm)	440 lb 200 kg (900 lb) (408 kg)	<ul style="list-style-type: none"> ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	385 W	120/240 V AC	3.2 A	A1 13 A2 14
	Top and Bottom	H4'-0", W18'-0", D6" (1219 mm, 5486 mm, 152 mm)						
SO-1830L-11 w/TNMC	2 Total	H8'-0", W32'-0", D6" (2438 mm, 9754 mm, 152 mm)	840 lb 381 kg (1596 lb) (724 kg)	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	740 W	120/240 V AC	6.2 A	A1 15 A2 16
	Top and Bottom	H4'-0", W32'-0", D6" (1219 mm, 7620 mm, 152 mm)						
SO-1930-11	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	560 lb 254 kg (1064 lb) (483 kg)	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	470 W	120 V AC	4.0 A	A1 15 A2 16
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)						
SO-1930-11 w/TMNC	2 Total	H8'-0", W25'-0", D6" (2438 mm, 7620 mm, 152 mm)	950 lb 432 kg (1550 lb) (703 kg)	<ul style="list-style-type: none"> ■ Clock 30" (762 mm) ■ TOL 18" (457 mm) ■ Indicators 8" (203 mm) ■ All Others 24" (610 mm) 	770 W	120 V AC	6.4 A	A1 15 A2 16
	Top and Bottom	H4'-0", W25'-0", D6" (1219 mm, 7620 mm, 152 mm)						

Section 4: Component Locations

Use the following drawings to determine the location of scoreboard components. The drawings are listed below by model number; they are located in **Appendix A: Reference Drawings**, where they are inserted in alphanumeric order by drawing number. Drawings for models that offer optional team name message centers typically include views with and without the TNMC components.

Model	Drawing Title	Drawing
BA-1518-11	Component Locations; BA-1518-11	A-157670
BA-1524-11	Component Locations; BA-1524-11	A-157842
BA-1524-11 TNMC	Component Locations; BA-1524-11 w/LED TNMC	A-165898
BA-2007-11	Component Locations; BA-2007-11	A-160564
BA-3718-11	Component Locations; BA-3718-11	A-158402
BA-3724-11	Component Locations; BA-3724-11	A-158416
BA-3724-11 TNMC	Component Locations; BA-3724-11 w/848-10 TNMC	A-159615
CR-2001-11	Component Locations; CR-2001-11	A-166250
FB-1424-11	Component Locations; FB-1424-11	A-160605
FB-1430-11	Component Locations; FB-1430-11	A-161107
FB-1524-11	Component Locations; FB-1524-11	A-160628
FB-1530-11	Component Locations; FB-1530-11	A-161113
FB-1624-11	Component Locations; FB-1624-11	A-160644
FB-1630-11	Component Locations; FB-1630-11	A-161157
FB-1630L-11	Component Locations; FB-1630L-11	A-162293
FB-1730-11	Component Locations; FB-1730-11	A-161281
FB-1830-11	Component Locations; FB-1830-11	A-161293
FB-1830L-11	Component Locations; FB-1830L-11	A-162322
FB-2001-11	Component Locations; FB-2001-11	A-162141
FB-2001-11 TNMC	Component Locations, FB-2001-11 w/LED TNMC	A-172659
FB-2002-11	Component Locations; FB-2002-11	A-162558
FB-2003-11	Component Locations; FB-2003-11	A-162738
FB-2004-11	Component Locations; FB-2004-11	A-162146
FB-2004-11 TNMC	Component Locations; FB-2004-11 w/LED	A-177842

(Continued on next page)

(Continued from previous page)

Model	Drawing Title	Drawing
MS-2009-11	Component Locations; MS-2009-11	A-163509
MS-2118-11	Component Locations; MS-2118-11	A-163616
MS-2918-11	Component Locations; MS-2918-11	A-172038
SO-1424-11	Component Locations; SO-1424-11	A-161277
SO-1624-11	Component Locations; SO-1624-11	A-162857
SO-1830-11	Component Locations; SO-1830-11	A-162948
SO-1830L-11	Component Locations; SO-1830L-11	A-163055
SO-1930-11	Component Locations, SO-1930-11	A-162951

Section 5: Schematics

Reference Drawings:

Schematic, Gen II Outdoor LED, 16 Column Drvr	Drawing A-154330
Schematic; Gen II OD LED, 3 Drvr, Multi-Sect & TNMC.....	Drawing A-158084
Schematic; LED TNMC, Gen II.....	Drawing A-158552
Schematic; Gen II, OD LED, 1 Drvr Display & TNMC.....	Drawing A-159419
Schematic; Gen II, OD LED, 3 Drvr Display	Drawing A-159920
Schematic; Gen II, OD LED, 3 Drvr Display & TNMC.....	Drawing A-159921
Schematic; Gen II, OD LED, 3 Drvr, Multi-Sect	Drawing A-159923
Schematic; Gen II, OD LED, 2 Drvr Display	Drawing A-159999
Schematic; Gen II, OD LED, 2 Drvr Display & TNMC.....	Drawing A-160547
Schematic; Gen II, OD LED, BA-2007 w/TNMC	Drawing B-160180

Use the following table to determine the schematic for your scoreboard. The drawings are listed below by model number; they have been inserted in the **Appendix** in alphanumeric order by drawing number.

☛ **Note:** All scoreboards listed in this manual are equipped with 16-column drivers.

Models	Schematic Name	Drawing
BA-1518-11	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
BA-1518-11 w/TNMC	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
BA-1524-11	Schematic, Gen II Outdoor LED, 16 Column Drvr	A-154330
BA-1524-11 w/TNMC	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
BA-2007-11 w/TNMC	Schematic; Gen II, OD LED, BA-2007 w/TNMC	A-160180
BA-3718-11	Schematic; Gen II, OD LED, 3 Drvr, Multi-Sect	A-159923
BA-3718-11 w/TNMC	Schematic; Gen II, OD LED, 3 Drvr Display & TNMC	A-159921
BA-3724-11	Schematic; Gen II, OD LED, 3 Drvr, Multi-Sect	A-159923
BA-3724-11 w/TNMC	Schematic; Gen II, OD LED, 3 Drvr Display & TNMC	A-159921
CR-2001-11	Schematic, Gen II Outdoor LED, 16 Column Drvr	A-154330
FB-1424-11	Schematic; Gen II Outdoor LED, 16 Column Drvr	A-154330
FB-1424-11 w/TNMC	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
FB-1430-11	Schematic; Gen II Outdoor LED, 16 Column Drvr	A-154330
FB-1430-11 w/TNMC	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
FB-1524-11	Schematic; Gen II Outdoor LED, 16 Column Drvr	A-154330
FB-1524-11 w/TNMC	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
FB-1530-11	Schematic; Gen II Outdoor LED, 16 Column Drvr	A-154330

(Continued on next page)

(Continued from previous page)

Models	Schematic Name	Drawing
FB-1530-11 w/TNMC	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
FB-1624-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-1630-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-1630-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
FB-1630L-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-1630L-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
FB-1730-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-1730-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
FB-1830-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-1830-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
FB-1830L-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-1830L-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
FB-2001-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-2001-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
FB-2002-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-2003-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-2003-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
FB-2004-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
FB-2004-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
MS-2009-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
MS-2118-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
MS-2918-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
SO-1424-11	Schematic, Gen II Outdoor LED, 16 Column Drvr	A-154330
SO-1424-11 w/TNMC	Schematic; Gen II, OD LED, 1 Drvr Display & TNMC	A-159419
SO-1624-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
SO-1624-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
SO-1830-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
SO-1830-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
SO-1830L-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
SO-1830L-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547
SO-1930-11	Schematic; Gen II, OD LED, 2 Drvr Display	A-159999
SO-1930-11 w/TNMC	Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	A-160547

Section 6: Mechanical Installation

Mechanical installation consists of installing concrete footings and steel beams, and mounting the scoreboard and accompanying ad panels to the beams.

6.1 Scoreboard Protective Devices

☛ *Note: Some users install devices to protect the scoreboard from projectiles. Scoreboard protection devices not provided by Daktronics must be approved by Daktronics prior to installation. Failure to follow this approval procedure will void the scoreboard warranty.*

Daktronics makes available optional devices, including screens and netting, to help protect the scoreboard from damage due to normal ball impacts.

6.2 Footings and Beams

Reference Drawings:

Installation Specifications, BA-1518	Drawing A-55008
Installation Specifications, BA-1524	Drawing A-120972
Installation Specifications, BA-3718	Drawing A-126455
Installation Specifications, BA-3724	Drawing A-126445
Installation Specifications; CR-2001-11	Drawing A-166286
Installation Specifications, FB-2002 & FB-2003.....	Drawing A-128044
Installation Specifications, MS-2009	Drawing A-144415
Installation Specifications, MS-2118	Drawing A-128206
Installation Specifications, MS-2918	Drawing A-172188
Beam & Footing Recommendations, FB-XX24.....	Drawing A-44514
Beam & Footing Recommendations, FB-XX30.....	Drawing A-44515
Beam & Footing Recommendations, FB-XX30L.....	Drawing A-158779
Beam and Footing Recommendations, FB-200X	Drawing A-160931
Beam Spacings, Football/Track/Soccer.....	Drawing A-70089
Structure, Football.....	Drawing A-44556
Beam Spacing; Displays w/TNMC	Drawing A-84292

Use the following tables to determine which drawings provide the installation specifications for each model.

Models	Reference Drawings	
BA-1518-11	Installation Specifications, BA-1518	A-55008
BA-1524-11	Installation Specifications, BA-1524	A-120972
BA-2007-11	Installation Specifications, BA-3724	A-126445
BA-3718-11	Installation Specifications, BA-3718	A-126455
BA-3724-11	Installation Specifications, BA-3724	A-126445
CR-2001-11	Installation Specifications, CR-2001-11	A-166286
MS-2009-11	Installation Specifications, MS-2009	A-144415
MS-2118-11	Installation Specifications, MS-2118	A-128206
MS-2918	Installation Specifications, MS-2918	A-172188

Models Without Team Name Message Center	Reference Drawings	
FB-1424-11, FB-1524-11, FB-1624-11, SO-1424-11, SO-1624-11	Beam & Footing Recommendations, FB-XX24	A-44514
	Beam Spacings, Football/Track/Soccer	A-70089
	Structure, Football	A-44556
FB-1430-11, FB-1530-11, FB-1630-11, FB-1730-11, FB-1830-11, FB-1830L-11, SO-1830-11, SO-1930-11	Beam & Footing Recommendations, FB-XX30	A-44515
	Beam Spacings, Football/Track/Soccer	A-70089
	Structure, Football	A-44556
FB-1630L-11, FB-1830L-11, SO-1830L-11	Beam & Footing Recommendations, FB-XX30L	A-158779
	Beam Spacings, Football/Track/Soccer	A-70089
	Structure, Football	A-44556
FB-2001-11, FB-2004-11	Beam and Footing Recommendations, FB-200X	A-160931
	Beam Spacings, Football/Track/Soccer	A-70089
	Structure, Football	A-44556
FB-2002-11, FB-2003-11	Installation Specifications, FB-2002 & FB 2003	A-128044
	Beam Spacings, FB/Track/Soc	A-70089
	Structure, Football	A-44556

Models With Team Name Message Center	Reference Drawings	
FB-1424-11, FB-1524-11, SO-1424-11, SO-1624-11	Beam & Footing Recommendations, FB-XX24	A-44514
	Beam Spacing; Displays w/TNMC	A-84292
	Structure, Football	A-44556
FB-1430-11, FB-1530-11, FB-1630-11, FB-1730-11, FB-1830-11, SO-1830-11, SO-1930-11	Beam & Footing Recommendations, FB-XX30	A-44515
	Beam Spacing; Displays w/TNMC	A-84292
	Structure, Football	A-44556
FB-1630L-11, FB-1830L-11 SO-1830L	Beam & Footing Recommendations, FB-XX30L	A-158779
	Beam Spacing; Displays w/TNMC	A-84292
	Structure, Football	A-44556
FB-2001-11, FB-2004-11	Beam and Footing Recommendations, FB-200X	A-160931
	Beam Spacings, Football/Track/Soccer	A-70089
	Structure, Football	A-44556
FB-2003-11	Installation Specifications, FB-2002 & FB 2003	A-128044
	Beam Spacings, FB/Track/Soc	A-70089
	Structure, Football	A-44556

These drawings specify the number of beams and the recommended spacing between them. The drawings also indicate the size of beams required to support the scoreboard at different heights under various wind speed conditions. All of the beam specifications illustrate "W" shape steel beams (wide-flange I-beams). The first number indicates the front-to-rear depth of the beam, and the second number indicates the weight in pounds per foot of length.

Column and footing size dimensions provided with the drawings can help in estimating installation costs. *They are estimates only and are not intended for construction purposes.* Be sure that your installation complies with local building codes and is suitable for your particular soil and wind conditions.

The columns and footings and all connection details must be designed and certified by a professional engineer licensed to practice in the state in which scoreboard will be installed. ***Daktronics does not assume any liability for any installation derived from the information provided in this manual or for those designed and installed by others.***

6.3 Lifting the Scoreboard or Optional One- or Two-Line Message Center

Reference Drawing:

Lifting the Scoreboard **Drawing A-44548**

Large scoreboard sections and message centers are shipped equipped with eyebolts that are used to lift the displays. The eyebolts are located along the top of the cabinet for each scoreboard or scoreboard section.

Daktronics strongly recommends using a spreader bar, or lifting bar, to lift the display. Using a spreader bar ensures that the force on the eyebolts is straight up, minimizing lifting stress. Lifting methods are shown in **Figure 3** and in **Drawing A-44548**.

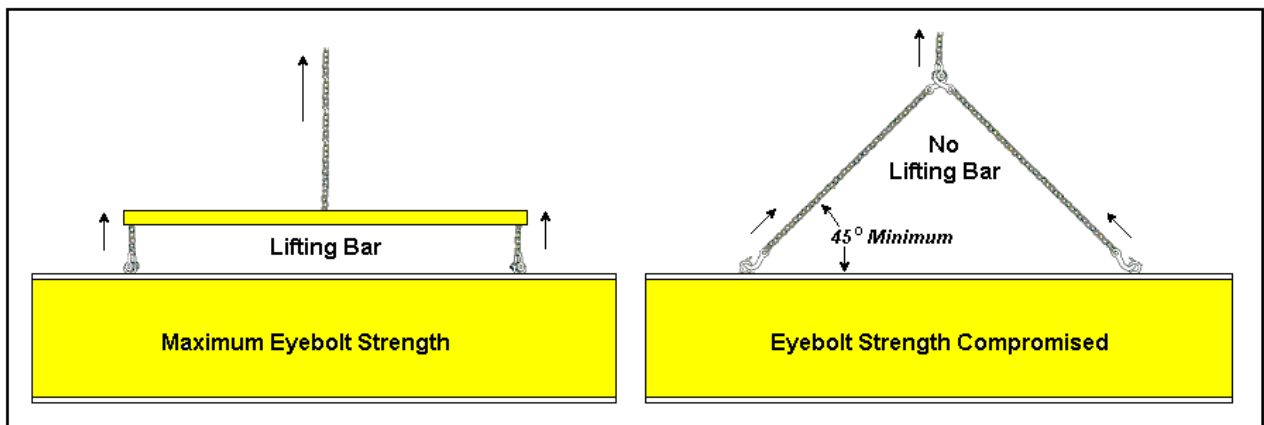


Figure 3: Lifting the Display

The graphic above illustrates both the preferred method (left example) and an alternative method (right example) for lifting a scoreboard. When lifting the display:

- Use a spreader bar.
- Use every lifting point provided.

Take special care not to exceed the rated load of the eyebolts. Refer to **ED7244, Eyebolts**, to determine allowable loads and load angles for the lifting hardware. **ED7244** is located in **Appendix B**.

Avoid using other lifting methods. Cables and chains attached to the eyebolts and directly to a center lifting point, as shown in the right-hand example in **Figure 3**, can create a dangerous lateral force on the eyebolts and may cause the eyebolts to fail. Daktronics scoreboards use $\frac{1}{2}$ " and $\frac{5}{8}$ " shoulder-type eyebolts mounted to a $\frac{1}{8}$ " aluminum plate or steel nut plate, but exceeding load angles or weight limits could cause the bolts to pull out or the scoreboard cabinet to buckle. In either circumstance, the result would be serious damage to the scoreboard. If you must use this method, ensure a minimum angle between the chain and scoreboard of at least 45° .

☛ **Note:** *Daktronics assumes no liability for scoreboard damage resulting from incorrect setup or incorrect lifting methods.*

Eyebolts are intended for lifting only. Do not attempt to permanently support the display by the eyebolts.

In typical multi-section installations, the lower scoreboard section is installed first and secured to the support beams, and then the upper section is placed atop or above the lower section and attached to the beams. There may be cables extending from the top of the lower section. Guide these cables into the hole in the bottom of the upper section for later connection.

If installers remove the lift eyebolts, plug the holes with bolts and the rubber sealing washers used with the eyebolts. Apply silicone or another waterproof sealant to the eyebolt openings. Inspect the top and sides of the display for any other holes or openings that may allow moisture to enter the display, and plug and seal those openings as well.

6.4 Scoreboard Mounting

Reference Drawings:

Installation Method	Drawing A-44412
Display Mounting Straps, BA-3718	Drawing A-114415

Scoreboards can be mounted on two, three or four poles. Refer to **Section 6.2** to determine the center-to-center distance of the poles and other installation specifications for each model.

Drawing A-44412 shows the hardware used for mounting the scoreboard to the beams. Each section of the scoreboard attaches at the top and the bottom to all the beams. The drawing also shows top and side views of the scoreboard secured to the beams. Note that the threaded rods *do not* pass through the flanges of the beams, but instead run along both sides of each beam

Review the illustrations of the mounting hardware in **Drawing A-44412**, and then follow this procedure for each section:

1. Using the $\frac{3}{8}$ " bolts, loosely attach the inner and outer mounting clamps to the rear flanges of the scoreboard's horizontal frame members. Measure the beam spacing and position the clamps to fit on either side of the beams.
2. Insert a $\frac{1}{2}$ " square nut into each mounting clamp. From the rear, screw a threaded rod into each of the nuts.
3. Position the scoreboard at the front of the beams with the threaded rods extending from the rear of the clamps, straddling the beams. Raise the scoreboard section to the desired height.
4. Slide clamping angles over the ends of the rods and loosely install the washers and nuts.
5. Make final adjustments in the positioning of the scoreboard. Tighten the $\frac{3}{8}$ " bolts in the mounting clamps.
6. Make sure that the threaded rods are perpendicular to the scoreboard, and tighten all of the $\frac{1}{2}$ " nuts.

Model BA-3718-11 requires the use of mounting straps. Refer to **Drawing A-114415** for installation instructions.

6.5 Ad Panel Mounting

Reference Drawing:

Ad Panel Mounting	Drawing A-52187
-------------------------	------------------------

Drawing A-52187 shows the mounting of advertising or identification panels. The installation requires mounting channel (C-channel), mounting angles, and $\frac{1}{2}$ " threaded rods (15"), square nuts, hex nuts, and washers.

Mount the ad panel or ad panels in the following manner:

1. Use the mounting channel to determine which hole combination to use. Be sure to keep the bolts as close to the beam as possible.
2. Using the mounting channel as a template, drill 9/16" holes in the upper and lower rear flange of the ad panel where the supports will go.
3. Place the 1/2" square nuts inside the channel and thread the long rods through.
4. Lift the ad panel into position with the threaded rods still in place.
5. Place mounting angles over each pair of rods and secure with lock washers and hex nuts.
6. When the panel is adjusted to the final desired position, tighten the hex nuts firmly.

When mounting ad panels with back sheets, remove the back sheets above and below the upper and lower rear flanges of the ad panel where the holes have been drilled. Be sure to replace the back sheets after placing the square nuts inside the channel and threading the rods through the holes.

6.6 Optional One- or Two-Line Message Center Mounting

Reference Drawing:

Mounting Detail; 2 1/2" Matrix **Drawing A-115882**

Some message centers may be mounted directly to support structure beams using the clamping method. Refer to the manual provided with the message center for instructions. Some retrofit message centers may be mounted directly to the scoreboard face.

Drawing A-115882 illustrates the mounting method for a 2 1/2"- matrix display.

Section 7: Electrical Installation

Electrical installation consists of the following processes:

- Providing power and ground to a disconnect near the scoreboard;
- Routing power and ground from the main disconnect to the scoreboard driver/power enclosure;
- Connecting the scoreboard ground to a grounding electrode at the scoreboard location;
- Routing the control signal cable from the control location to the scoreboard location.

☛ **Note:** *Only qualified individuals should perform power routing and termination to the display. It is the responsibility of the electrical contractor to ensure that all electrical work meets or exceeds local and national codes.*

7.1 Power

Reference Drawing:

Schematic; Gen II Outdoor LED, 16 Column Drvr **Drawing A-154330**

Daktronics outdoor LED scoreboards have been designed for easy access to components, and the power and control signal hookup has been simplified. Front panels are removable to allow access to the digits, cabling, and other electronic components.

Correct power installation is imperative for proper display operation. The subsections that follow give details of display power installation. Only qualified individuals should attempt to complete the electrical installation; untrained personnel should not attempt to install these displays or any of the electrical components. Improper installation could result in serious damage to the equipment and could be hazardous to personnel.

The multi-section outdoor scoreboards require a dedicated, 120 V circuit for incoming power. The display itself has no breakers or fuses.

☛ **WARNING:** *It is critical that the scoreboard circuit be fused at 15 A, and that all conductors used must be designed to pass a 15 A current in normal operation. Failure to meet wiring and overcurrent protection device requirements is a violation of the National Electrical Code® and will void the scoreboard warranty.*


All power conductors are 14 AWG, except where 18 AWG wiring is called out on the schematic. All signal conductors are 22 AWG.

Refer to the outdoor scoreboard schematic listed above and to the chart in **Section 3** to determine circuit specifications and maximum power requirements for the models described in this manual.

Grounding

Reference Drawing:

Schematic; Gen II Outdoor LED, 16 Column Drvr..... **Drawing A-154330**

 *Displays **MUST** be grounded according to the provisions outlined in Article 250 of the National Electrical Code and according to the specifications in this manual. Daktronics recommends a resistance-to-ground of 10 ohms or less.*

The contractor performing the electrical installation can verify ground resistance. Scoreboard Sales and Service personnel can also provide this service.

The display system *must* be connected to an earth electrode installed at the display. Proper grounding is necessary for reliable equipment operation. It also protects the equipment from damaging electrical disturbances and lightning. ***The display must be properly grounded, or the warranty will be void.*** Refer to the schematic, **Drawing A-154330**, for information on where to connect the grounding wire. Connection at the duplex receptacle is illustrated in the lower section of the drawing.

The material for an earth-ground electrode differs from region to region and may vary according to conditions present at the site. Consult the National Electrical Code and any local electrical codes that may apply. The support structure of the display cannot be used as an earth-ground electrode. The support is generally embedded in concrete, and if it is in earth, the steel is usually primed or it corrodes, making it a poor ground in either case.

Power Installation

There are two considerations for power installation: installation with ground and neutral conductors provided, and installation with only a neutral conductor provided. These two power installations differ slightly, as described in the following paragraphs:

Installation with Ground and Neutral Conductors Provided

For this type of installation, the power circuit *must* contain an isolated earth-ground conductor. Under this circumstance, *do not* connect neutral to ground at the disconnect or at the display. ***This would violate electrical codes and void the warranty.*** Use a disconnect so that all hot lines and neutral can be disconnected. The National Electrical Code requires the use of a lockable power disconnect within sight of or at the display.

Installation with Only a Neutral Conductor Provided

Installations where no grounding conductor is provided must comply with Article 250-32 of the National Electrical Code. If the installation in question meets all of the requirements of Article 250-32, the following guidelines must be observed:

- Connect the grounding electrode cable at the local disconnect, never at the display driver/power enclosure.
- Use a disconnect that opens all of the ungrounded phase conductors.

7.2 Power and Signal Connection

Reference Drawings:

Driver; 16 Col Outdoor LED, Gen II	Drawing A-154792
Schematic; Gen II Outdoor LED, 16 Column Drvr	Drawing A-154330

Route power and signal cables into the scoreboard from the rear. There are two knockouts for conduit connection in the back. All power and signal wiring terminates at the driver enclosure. **Drawing A-154792** illustrates the 16-column driver used in Daktronics multi-section LED scoreboards.

To gain access to the driver enclosure, open the access door or digit panel and remove the cover from the enclosure. Refer to the component locations drawings for the access location for your scoreboard.

Connect the power and signal cables at the appropriate locations on the driver enclosure panel, shown in **Drawing A-154792**.

The power feeder circuit connects directly to a receptacle in the driver enclosure, as shown in **Figure 4**. The receptacle is located in the lower right corner of the enclosure. Refer to the driver illustration and the schematic, **Drawing A-154330**, for wiring details. The schematic includes a detailed illustration of the power termination.

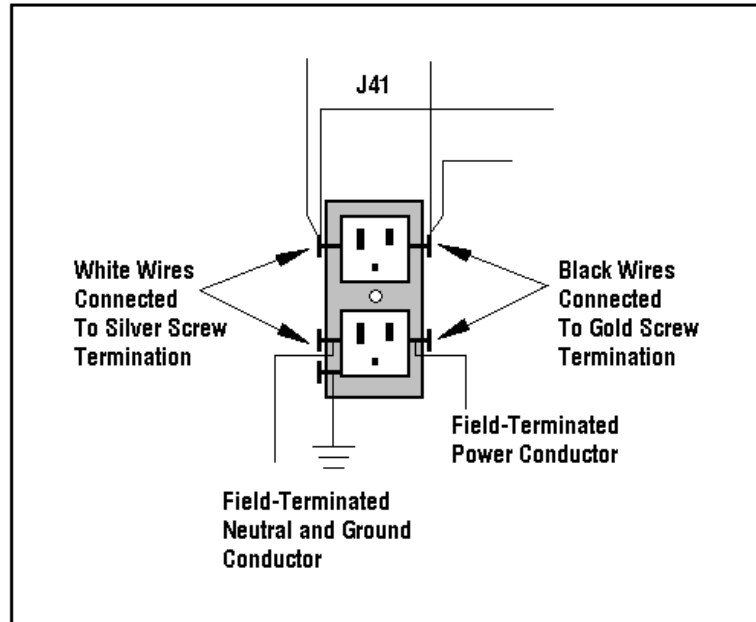


Figure 4: 120 V Power Receptacle in Driver Enclosure

Route signal cabling to the terminal block in the upper left corner of the enclosure. The connections are labeled to permit easy installation. At the Signal In terminal block, connect the red signal wire to the positive terminal, the black to the negative terminal, and the shield (silver) wire to the shield terminal. *It is important that the shield wire is properly connected to the shield terminal on the signal surge arrestor card.* **Figure 5** illustrates the printed circuit board and the terminal blocks.

For signal cable, Daktronics recommends, as a minimum, single-pair, shielded cable, 22 AWG (Daktronics part number W-1077). Two-pair shielded cable (Daktronics part W-1234) is preferred.

For additional information on signal connection, refer to the All Sport 5000 Series or All Sport 3000 Series control console operation manuals, **ED11976** and **ED12126**.




Figure 5: Signal Surge Arrestor Card

Interconnect Panel Connections

Reference Drawing:

Interconnect Panel Digit Designation **Drawing A-174754**

All multi-section football and soccer scoreboards use an interconnect panel as a connection between the digits of the top section and their corresponding driver. Because one driver runs the top section of the board, while the other driver runs the bottom section, only the top section digits use an interconnect panel. See **Figure 6** for further illustration. For detailed digit designation and the resulting interconnect panel and driver designation refer to **Drawing A-174754**.

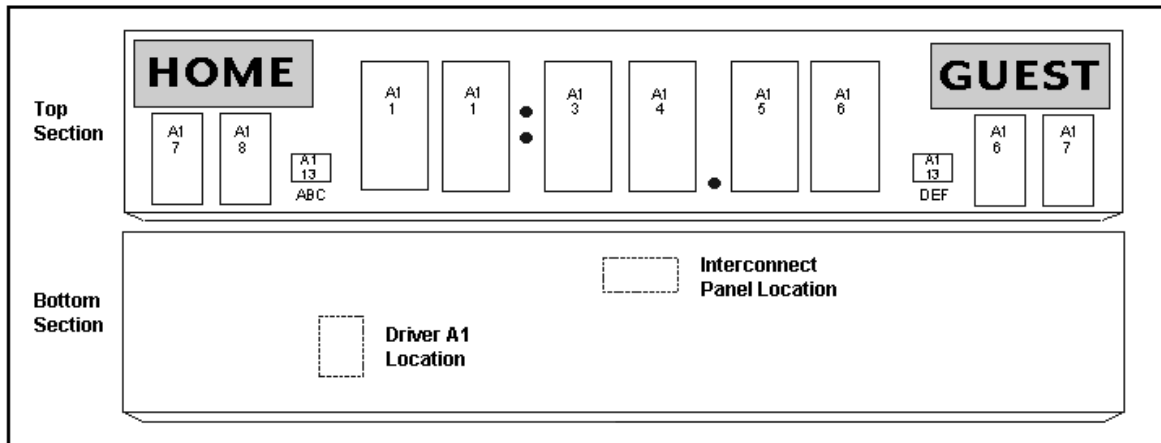


Figure 6: Interconnect Panel Digit Designation

Multiple Driver Connections

All of the large, multi-section LED scoreboards require multiple drivers, and those models have been configured to operate with a master/slave driver system. Master and slave drivers function identically, but slave units lack the power receptacle and signal surge suppression card. The two drivers have been designed to simply plug into one other via an interconnect harness, the slave receiving power and redriven signal from the master driver enclosure. Larger boards can add as many driver slaves as they require.

All driver interconnect harnesses are factory-installed. No additional connection is necessary. (The harness emerges from the bottom of the master driver enclosure, and the J42 jack from the master is connected to the slave's P43 plug.) Likewise, signal cables from drivers to digit also have been factory-installed, and no additional connection is necessary.

Refer to your scoreboard drawings to determine driver location and other model-specific information.

Section 8: Scoreboard Maintenance and Troubleshooting



IMPORTANT NOTES:

1. Disconnect power before doing any repair or maintenance work on the scoreboard.
2. Allow only qualified service personnel access to internal display electronics.
3. Disconnect power when not using the scoreboard.

☛ *Note:* For assistance in the maintenance of team name message centers or other optional scoreboard message centers, refer to **Section 9** or the service manual that accompanies those units.

8.1 Cabinet Specifications

Cabinets for the Daktronics outdoor LED scoreboards are constructed of heavy-gauge aluminum. Exact dimensions and weights for each model are listed in the chart in **Section 3**. Removable panels for digits and indicators and for component access are detailed in each model's component locations drawing, listed in **Section 4**.

8.2 Component Location and Access

Reference Drawing:

Digit Assembly (18 and 24") Drawing A-135662

For the front-access scoreboards in this series, all internal electronic components and digits can be reached by opening a face panel, an access door or a digit panel on the front of the display. Most have hinged doors.

Digit panels have been simplified on the outdoor LED scoreboards. They are held in place on the scoreboard face by an offset flange across the top and by a single screw at the bottom. Care is required in opening the scoreboard. Hold the digit panel in place by putting hand pressure on it while removing the screw, and carefully lift it from the board, sliding it down and out. If the panel is not held in place, it will drop immediately when the screw is removed, possibly damaging LEDs or the digit harness. Refer to **Figure 7** at right and to **Drawing A-135662**, which illustrates a representative digit assembly.

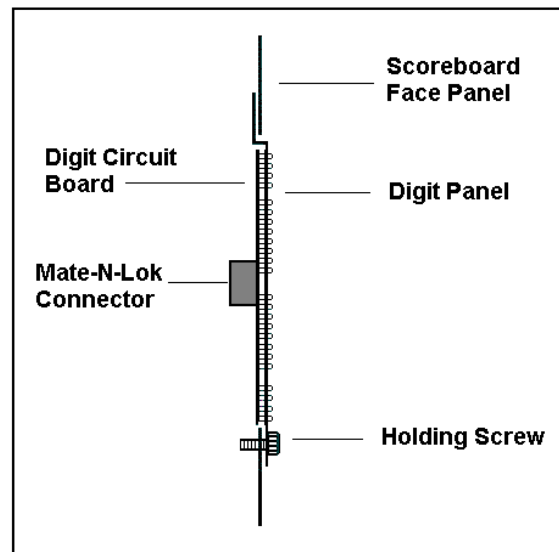


Figure 7: LED Digit Panel (Not to Scale)

Component placement varies with each scoreboard model; consult the model-specific component locations drawing to determine the layout for your scoreboard.

With a non-digit access panel, simply remove the top, side, and bottom screws holding it in place. As noted previously, some access panels are hinged doors and swing open when the screws are removed or loosened.

☛ **Note: Disconnect power before servicing the display!** Disconnect power, too, when the display is not in use. Prolonged power-on may shorten the life of some electronic components.

Replacing a Digit

The digit circuit board, the platform for the LEDs, is mounted to the back of the digit panel. Do not attempt to remove individual LEDs. In the case of a malfunctioning board, replace the entire digit panel. Refer to **Figure 8** at right and to **Drawing A-135662**.

To remove a scoreboard digit, follow these steps:

1. Open the digit panel as described in the preceding section.
2. Disconnect the power/signal connector from the back of the digit. Release the connector by squeezing together the locking tabs as you pull the connector free.
3. The digits are secured to the inside of the panel with standoff bolts, spacers and nuts. Remove the #8 nuts and lift the digit off the standoff bolts.
4. Position a new digit over the bolts and tighten the nuts.
5. Reconnect the power/signal connector. ☛ **Note:** *This is a keyed connector, it will attach in one way only. Do not attempt to force the connection!*
6. Close and secure the digit panel and test the scoreboard.

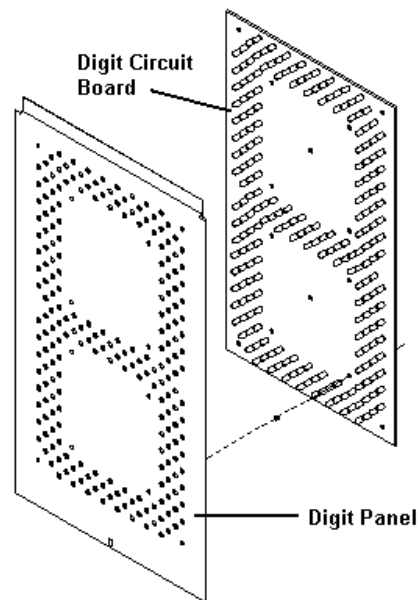


Figure 8: Digit Assembly

Replacing a Digit Segment

Reference Drawing:

30" Amber LED Digit Assembly Drawing A-161254

When a digit malfunctions, in most cases it is necessary to replace the entire digit circuit board. Some larger digits (24", 30", 36"), however, are constructed in segments (see **Figure 9**), and it may be possible to make repairs by removing only the defective segment. As with smaller digits, the digit segment circuit boards are mounted to the back of the digit panel. *Do not attempt to remove individual LEDs.* Refer to **Drawing A-161254**.

To remove a digit segment, follow these steps:

1. Open the digit panel as described above.
2. Disconnect the 2-pin power/signal connector from the back of the individual segment. Release the connector by squeezing together the locking tabs as you pull the connector free.
3. The segments are secured to the inside of the panel with standoff bolts, spacers, and nuts. Remove the #8 nuts and lift the segment off the standoff bolts.
4. Position a new segment over the bolts and tighten the nuts.
5. Reconnect the power/signal connector. **Note:** *This is a keyed connector, it will attach in one way only. Do not attempt to force the connection!*
6. Close and secure the digit panel and test the scoreboard.

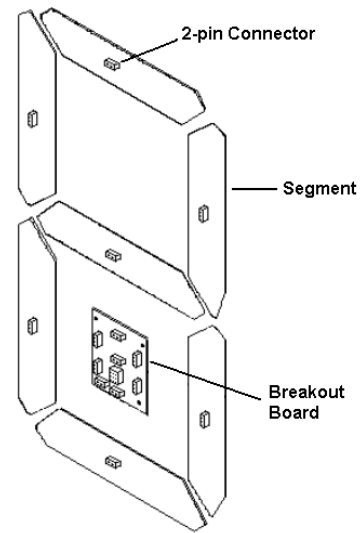


Figure 9: Segmented Digit Panels (Rear View)

Replace a malfunctioning colon, decimal, or indicator assembly in the same manner.

Replacing a Breakout Board

The digit breakout board, the central signal/power termination for segmented digits, is mounted to the back of the digit panel. If the entire digit is malfunctioning, replace the breakout board. See **Figure 9** and refer to **Drawing A-161254**.

To remove a digit breakout board, follow these steps:

1. Open the digit panel as described in the previous section.
2. Disconnect all of the 2-pin and 9-pin power/signal connectors from the back of the breakout board. Release the connectors by squeezing together the locking tabs as you pull the connector free.
3. The breakout boards are secured to the inside of the panel with standoff bolts, spacers, and nuts. Remove the #8 nuts and lift the breakout board off the standoff bolts.
4. Position a new breakout board over the bolts and tighten the nuts.
5. Reconnect the power/signal connectors. **Note:** *These are keyed connector; they will attach in one way only. Do not attempt to force the connection!*
6. Close and secure the digit panel and test the scoreboard.

Replacing a Driver

Drivers are typically mounted inside the scoreboard and immediately behind a digit, but location and mounting varies with the model of the scoreboard. Refer to the component locations drawings in **Section 4** for the location of your scoreboard driver.

Each driver is enclosed with a power supply and signal terminal block. Before a failed driver can be reached, the enclosure must be accessed. Follow these steps:

1. Open the digit panel or scoreboard access panel as described in **Section 8.2**.
2. Remove the cover from the driver enclosure.
3. Disconnect all connectors from the driver. Release each released by squeezing together the locking tabs as you pull the connector free. **Note:** *These are keyed connectors and will attach in one way only. Do not attempt to force the connections!*
4. Remove the hardware securing the driver to the inside of the enclosure.
5. Carefully lift the driver from the display and place it on a clean, flat surface.
6. Follow steps 1 through 5 in reverse order to attach a new driver.

8.3 Schematics

Refer to **Section 5** for a complete listing of the schematics for the Daktronics multi-section outdoor LED scoreboards. The drawings diagram the power and signal inputs and all wiring for each scoreboard model.

8.4 LED Drivers

Reference Drawings:

Driver; 16 Col Outdoor LED, Gen II.....	Drawing A-154792
16 Column LED Driver II Specifications.....	Drawing A-134371
Address Table, 1 Through 128.....	Drawing A-115078

In the scoreboard, the LED drivers perform the task of switching digits on and off. Refer to **Drawing A-154792**. Each driver has 20 or more connectors providing power and signal inputs to the circuit, and outputs to the digits and indicators. The connectors function as follows:

16-Column LED Driver	
Connector No.	Function
1 – 16	Outputs to digits and indicators
17	Power and signal input
18	Relay
19	Address
20	Protocol

Output connectors 1 through 16 each have nine pins. Pin 7 provides power (hot) to the digit or indicators wired to that connector. The other eight pins provide switching connections.

For the scoreboard to receive signal and function properly, the driver must be set to the correct address. This address is set with jumper wires in a 12-pin plug which mates with a jack on the driver.

Drawing A-134371 details the specifications for the 16-column driver. Refer to **Drawing A-115078** for a listing of the wire/pin connections for driver addresses 1 - 128.

8.5 Segmentation and Digit Designation

Reference Drawings:

Segmentation, 7 Segment Bar Digit **Drawing A-38532**
 Interconnect Panel Digit Designation; FB Displays **Drawing A-174754**

In each digit, certain LEDs always go on and off together. These groupings of LEDs are referred to as *segments*. **Drawing A-38532** illustrates digit segmentation. It also indicates which connector pin is wired to each digit segment and the wiring color code used throughout the display.

The component locations drawings in **Section 4** specify the driver connectors controlling the digits. Numbers shown in hexagons in the upper half of each digit indicate the digit designation, that is, which connector is wired to that digit.

Some scoreboard models make use of an interconnect panel. For those scoreboards, **Drawing A-174754** further illustrates digit designation and harness connections. Also located within this drawing is a table listing the precise labeling of harnesses for connection to the interconnect panel and the related driver.

8.6 Troubleshooting

This section lists potential problems with the scoreboard, indicates possible causes and suggests corrective action. This list does not include every possible problem, but it does represent some of the more common situations that may occur. (Refer to the appropriate manual for a list of potential problems with add-on or separately mounted message centers.

Symptom/Condition	Possible Cause
<i>Scoreboard will not light</i>	<ul style="list-style-type: none"> ▪ Console not connected or poor connection ▪ No power to control console ▪ No power to the scoreboard
<i>Garbled display</i>	<ul style="list-style-type: none"> ▪ Internal driver logic malfunction ▪ Control console malfunction
<i>Digit will not light</i>	<ul style="list-style-type: none"> ▪ Black wire to digit broken ▪ Poor contact at driver connection ▪ Driver malfunction
<i>Segment will not light</i>	<ul style="list-style-type: none"> ▪ Broken LED or connection ▪ Driver shift register failure ▪ Broken wire between driver and digit ▪ Poor contact at driver connector

(Continued on next page)

(Continued from previous page)

Symptom/Condition	Possible Cause
<i>Segment stays lit</i>	<ul style="list-style-type: none">■ Driver shift register failure■ Short circuit on digit
<i>Date appears in the wrong place on the scoreboard</i>	<ul style="list-style-type: none">■ Incorrect address settings on drivers (consult tables and set correct addresses)

☛ **Important:** When the LED drivers are replaced, plugs P25 and P26 (if present) must be removed from the old driver and plugged into the new driver.

8.7 Lightning Protection

The use of a disconnect near the scoreboard to completely cut all current-carrying lines significantly protects the circuits against lightning damage. The National Electrical Code also requires it. In order for this device to provide protection, the power *must* be disconnected when the scoreboard is not in use. The control console should also be disconnected from power and from the signal j-box when the system is not being used. The same surges that may damage the scoreboard's driver can also damage the console's circuit.

8.8 Replacement Parts

Refer to the following table for Daktronics scoreboard replacement parts. (Refer to the appropriate manual for a listing of parts required for the service of optional message centers.)

Description	Location	Daktronics Part No.
Driver, 16 col, outdoor, LED	Driver enclosure	0P-1192-0011
Driver, 8 col, outdoor, LED	Driver enclosure	0P-1192-0012
Power supply, 24 V, 150W, 86-132 V input	Driver enclosure	A-1720
Signal surge arrestor w/radio jack, outdoor	Driver enclosure	0P-1110-0011
Fan, 32 cfm, 24 V DC, 3.15 sq. in	Driver enclosure	B-1030
Plug, 1/4" phone	Signal	P-1003
J-box, 1/4" phone, Indoor	Signal	0A-1009-0038
J-box, 1/4" Phone, outdoor	Signal	0A-1091-0227
12V DC trumpet horn asm.	Scoreboard	0A-1091-1213
Signal cord; 1/4" phone 20'	Signal	W-1236
Signal cord; 1/4" phone 30'	Signal	W-1238
Signal cord; 1/4" phone 50'	Signal	W-1237

(Continued on next page)

(Continued from previous page)

Description	Location	Daktronics Part No.
Digit, 15", 7-seg outdoor LED, red-orange	Scoreboard	0P-1192-0009
Digit, 15", 7-seg outdoor LED, amber	Scoreboard	0P-1192-0054
Digit, 18", 7-seg outdoor LED, red-orange	Scoreboard	0P-1192-0008
Digit, 18", 7-seg outdoor LED, amber	Scoreboard	0P-1192-0036
Digit, 18" ones digit, outdoor LED, red-orange	Scoreboard	0P-1192-0013
Digit, 18" ones digit, outdoor LED, amber	Scoreboard	0P-1192-0038
Digit, 24" 7-seg outdoor LED, red-orange	Scoreboard	0P-1192-0040
Digit segment, 24" outdoor LED, amber (horizontal)	Scoreboard	0P-1192-0050
Digit segment, 24" outdoor LED, amber (vertical)	Scoreboard	0P-1192-0051
Digit, 24" ones digit, outdoor LED, amber	Scoreboard	0P-1192-0014
Digit segment, 30" outdoor LED, red-orange	Scoreboard	0P-1192-0019
Digit segment, 30" outdoor LED, amber (horizontal)	Scoreboard	0P-1192-0034
Digit segment, 30" outdoor LED, amber (vertical)	Scoreboard	0P-1192-0043
Digit segment, 36" outdoor LED, red-orange	Scoreboard	0P-1192-0024
Digit segment, 36" outdoor LED, amber (horizontal)	Scoreboard	0P-1192-0052
Digit segment, 36" outdoor LED, amber	Scoreboard	0P-1192-0053
Indicator, 2" circular, outdoor LED, red-orange	Scoreboard	0P-1192-0010
Indicator, 2" circular, outdoor LED, amber	Scoreboard	0P-1192-0037
Indicator, possession, football, outdoor LED, red-orange	Scoreboard	0P-1192-0018
Indicator, possession, football, outdoor LED, amber	Scoreboard	0P-1192-0039
Segment breakout board, 24"	Scoreboard	0P-1192-0019
Segment breakout board, 36"	Scoreboard	0P-1192-0023

8.9 Daktronics Exchange and Repair and Return Programs

To serve customers' repair and maintenance needs, Daktronics offers both an Exchange Program and a Repair and Return Program.

Daktronics' unique Exchange Program is a quick, economical service for replacing key components in need of repair. If a component fails, Daktronics sends the customer a replacement, and the

customer, in turn, sends the failed component to Daktronics. This not only saves money but also decreases scoreboard downtime.

Daktronics provides these plans to ensure users get the most from their Daktronics products, and it offers the service to qualified customers who follow the program guidelines explained below. Please call the Help Desk – 877-605-1115 – if you have questions regarding the Exchange Program or any other Daktronics service.

When you call the Daktronics Help Desk, a trained service technician will work with you to solve the equipment problem. You will work together to diagnose the problem and determine which exchange replacement part to ship. If, after you make the exchange, the equipment still causes problems, please contact our Help Desk immediately.

If the replacement part fixes the problem, package the defective part in the same box and wrapping in which the replacement part arrived, fill out and attach the enclosed UPS shipping document, and *RETURN THE PART TO DAKTRONICS*. In most circumstances, you will be invoiced for the replacement part at the time it is shipped. This bill is due when you receive it.

Daktronics expects immediate return of an exchange part if it does not solve the problem. The company also reserves the right to refuse equipment that has been damaged due to acts of nature or causes other than normal wear and tear.

If the defective equipment is not shipped to Daktronics within 30 working days from the invoice date, it is assumed you are purchasing the replacement part, and you will be invoiced for it. This second invoice represents the difference between the exchange price and the full purchase price of the equipment. The balance is due when you receive the second invoice. If you return the exchange equipment after 30 working days from the invoice date, you will be credited for the amount on the second invoice, minus a restocking fee.

☺To avoid a restocking charge, please return the defective equipment within 30 days from the invoice date.

Daktronics also offers a Repair and Return program for items not subject to exchange.

Return Materials Authorization: To return parts for service, contact your local representative prior to shipment to acquire a Return Material Authorization (RMA) number. If you have no local representative, call the Daktronics Help Desk for the RMA. This expedites repair of your component when it arrives at Daktronics.

Packaging for Return: Package and pad the item well so that it will not be damaged in shipment. Electronic components such as printed circuit boards should be installed in an enclosure or placed in an antistatic bag before boxing. Please enclose your name, address, phone number and a clear description of symptoms.

This is how to reach us:

Mail: Customer Service
Daktronics, Inc.
PO Box 5128
331 32nd Ave
Brookings SD 57006

Phone: Daktronics Help Desk:
877-605-1115 (toll free)
or 605-697-4036

Fax: 605-697-4444

E-mail: helpdesk@daktronics.com

Section 9: Team Name Message Center Maintenance



IMPORTANT NOTES:

1. **Disconnect power before doing any repair or maintenance work on the scoreboard!**
2. **Permit only qualified service personnel to access internal display electronics.**
3. **Disconnect power when the scoreboard is not in use.**

9.1 Team Name Message Center System Overview

Team name message centers are available in two sizes: an 8x32 matrix model, comprised of four 8x8-pixel modules, and an 8x48 model, made up of six 8x8 modules. TNMCs are typically installed in pairs. Light emitting diodes (LEDs) illuminate the displays.

The monochrome message centers feature an array of red LEDs, and they are capable of displaying characters up to 10" high. Pixels on the 10" TNMC consist of a three-LED cluster.

Although TNMCs are customarily used for team names, they are programmable and can display any type of caption. Characters are shown on a single line, and either single- or double-stroke fonts may be used for the caption or name.

9.2 Maintenance and Troubleshooting Overview

Standard Daktronics outdoor LED scoreboards are typically front-accessible, but some models may be ordered with rear service access. Consequently, Daktronics team name message centers have been designed so that they may be accessed from both the front *and* rear for easy maintenance and repair of internal components.

This section provides the following TNMC information:

- **Signal Routing Summary:** provides a basic explanation of the signal travel through the TNMC display.
- **Power Routing Summary:** provides a basic explanation of the power travel through the display.
- **Service and Diagnostics:** provides instructions for removing various display components and explains the functions of circuit board connectors and the meanings of any diagnostic LEDs.
- **Maintenance:** lists a number of steps to take to keep this Team Name Message Centers in safe, working order.
- **Troubleshooting:** lists possible display malfunctions and suggests a number of causes and corrections for each malfunction.
- **Replacement Parts List:** includes the part descriptions and numbers of display components that may need replacement during the life of the display.

9.3 Signal Summary

Reference Drawing:

Control Layout; Outdoor LED TNMC **Drawing B-107507**

Refer to **Drawing B-107507** for complete information on TNMC signal routing. From signal input from the All Sport controller, routing can be summarized as follows:

1. Data from the display controller travels via cable harness into the display.
2. The signal then travels through the driver/power enclosure to the J1 connector on the current loop interface card.
3. Data exits at J3 and is relayed to the J1 connector on the multipurpose display controller (MDC). The signal then exits the MDC and enters the first module of the TNMC.
4. Signal is relayed from module to module until it reaches the last module on the message center. Refer to **Drawing B-107507**.

9.4 Power Summary

Reference Drawing:

Control Layout; Outdoor LED TNMC **Drawing B-107507**

Refer to **Drawing B-107507**. Power routing for the display can be summarized as follows:

1. Incoming power terminates at the power and signal entrance enclosure. It is then routed to the power supply within the TNMC.
2. From the power supply, power is relayed to the MDC, the current loop interface (CLI) card, and to each module.

9.5 Service and Diagnostics

Reference Drawings:

Control Layout; Outdoor LED TNMC **Drawing B-107507**
Exploded Front, Module **Drawing B-126111**
Exploded Rear, Module **Drawing B-126112**
F. Assy; 832 LED TNMC **Drawing B-159055**
F. Assy; 848 LED TNMC **Drawing B-159081**
Component Layout; 832/848 LED TNMC **Drawing A-145045**
Schematic; LED TNMC, Gen II **Drawing A-158552**

The following subsections address servicing of these display components:

- TNMC Interface Card
- TNMC Controller
- Modules and Drivers
- Power Supplies

The subsections also address any diagnostic LEDs, fuses and signal/power connectors found on the unit. On **Drawings A-159055, A-159081, and A-145045**, the TNMC components are denoted as follows.

Component	Part Number	Location
TNMC CLI card	0A-1146-0020	Behind modules, on TNMC back panel. Refer to Drawing A-145045 .
TNMC controller	0A-1146-0061	Behind modules, on TNMC back panel. Refer to Drawing A-145045 .
Modules	0A-1208-3002	Over entire face of the TNMC. Refer to Drawings A-159055 and A-159081 .
Power supplies	0A-1213-4013	Behind modules and attached to power supply assembly 0A-1213-4013 on the back panel. Refer to Drawing A-145045 .

☛ **Remember: Disconnect power before servicing internal components!**

TNMC Current Loop Interface Card

The current loop interface (CLI) card, located on the rear-access panel of the TNMC, translates the signal media to TIA/EIA-232 (formerly RS-232) for use within the components of the TNMC. The signal transfers into the TNMC controller where that component interprets and distributes the data to the modules. Refer to **Drawing A-145045**.

TNMC Controller

The controller, located on the rear-access panel, receives signal from the CLI and sends data to

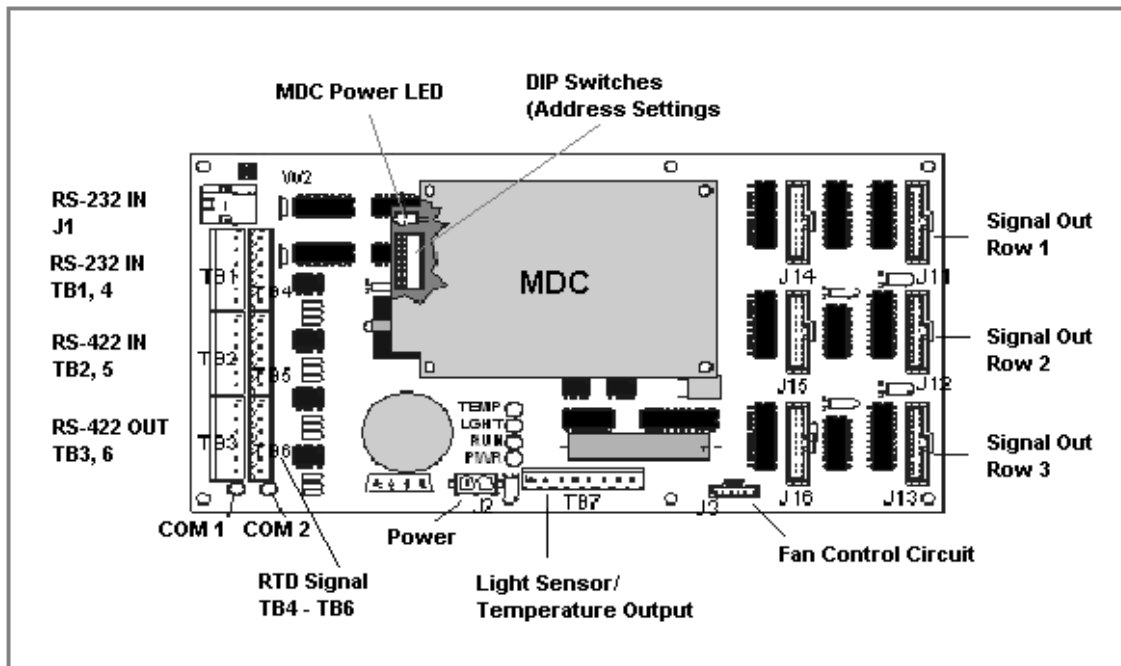


Figure 10: Controller Component Layout

the modules. Refer to the signal summary in **Section 9.3** for more information and to **Drawing A-145045** for the position of the controller board. **Figure 10** illustrates a typical controller DIP

switches are located on the controller's MDC (see preceding illustration). These DIPswitches set the hardware address that the software uses to identify that particular display. When replacing a controller board, be sure to set the DIP switches in the same address configuration as the defective controller.

☛ **Note:** Setting the DIP switches to address 0 (turn all the switches to OFF by switching them toward the printed switch numbers) can activate a test mode. Power down the display and then reconnect to run the test mode.

Switch Number								Address
8	7	6	5	4	3	2	1	
Off	Off	Off	Off	Off	Off	Off	Off	Test Mode
Off	Off	Off	Off	Off	Off	Off	On	1 (Home)
Off	Off	Off	Off	Off	Off	On	Off	2 (Guest)

Four diagnostic LEDs are located on the controller. Two other LEDs indicate when the MDC is receiving signal information. The following table explains what each LED represents.

LED	Color	Function	Operation	Summary
TEMP	Red	Temperature level	Flashes	Flash rate is dependent upon the temperature. The LED flashes faster in high temperature and slows as the temperature decreases.
LGHT	Red	Photocell light level	Flashes	Flash rate is dependent on the light level. The LED flashes faster in bright light and slows as darkness descends.
RUN	Red	Controller	Steady Flash	A steady flash indicates the controller is running correctly. Normal flash rate is about once a second.
PWR	Green	Power	Always On	The LED, when lit, indicates that there is power to the data input circuit.
RX1	Yellow	Com 1	Flashes	The LED turns on and flashes when receiving information.
RX2	Yellow	Com 2	Flashes	The LED turns on and flashes when receiving information; this LED is typically used in custom applications.

Removing/Changing the Controller

Complete the following steps to remove the controller from the display.

1. To access the controller from the front, unlatch the latch fasteners on the LED module. (The fasteners may be referred to as "latch plugs" on the drawings). One is centered below the top row of pixels and one is centered above the bottom row. Using a $\frac{7}{32}$ " nut driver, turn each fastener a quarter-turn. Turn the top latch clockwise and the bottom latch counterclockwise. Carefully remove the module and detach the ribbon cables. It may be helpful to label the cables so you will know which cable goes to which connector when reattaching.

To access the controller from the rear of the TNMC, remove the right rear-access panel from the TNMC by loosening all four of the screws. Slide the access panel sideways to the larger keyhole and carefully lift it off the TNMC. Take care not to drop the panel, and remember that the module controller is attached to the panel.

2. Disconnect power from J2.
3. Remove all power and signal connections from the board. Release "locked" connectors by squeezing together the tabs, and then carefully pulling them from the jack. Label the cables, indicating which cable was removed from which connector; the labeling will be helpful when you replace the board.
4. Remove the four nuts holding the board in place.
5. Follow the previous steps in reverse order to install a new controller board.

Modules and Drivers

The module and driver board are a single, functional unit.

The LED power supplies are identified as assemblies (refer to **Power Supplies**, following in this section). Each power supply unit controls four modules; a power supply assembly (two power supply units) controls eight modules.

Removing/Changing a Module

To remove a module, complete the following steps:

1. The modules are attached to an internal frame called the module mounting panel. Find the latch-access fasteners (referred to as "latch plugs" on the drawings) on the module. One is centered below the top row of pixels and one is centered above the bottom row.
2. Using a $\frac{7}{32}$ " nut driver, unlatch the latch fasteners by turning them a quarter-turn. Turn the top latch clockwise and the bottom latch counterclockwise. Carefully remove the module and detach the ribbon cables. Label the cables, indicating which cable was removed from which connector; the labeling will be helpful when you replace the board.

To access the controller from the rear of the TNMC, remove the right rear-access panel from the TNMC by loosening all four of the screws. Slide the access panel sideways to the larger keyhole and carefully lift it off the TNMC. Take care not to drop the panel, and remember that the module controller is attached to the panel. With a $\frac{7}{32}$ " nut driver, turn the latch-access fasteners a quarter-turn. Turn the top latch counter-clockwise and the bottom latch clockwise.

3. If you are accessing the unit from the rear, follow this procedure: While holding onto the module, push it out and turn it in such a manner (generally a sideways, diagonal turn) that it will fit through the frame opening. Then pull the module back through the opening in the frame. Carefully disconnect the ribbon cables. Once again, label the cables, indicating which cable was removed from which connector; the labeling will be helpful when reconnecting.

When installing a module, reverse the previous steps and take note of the following points:

- Weatherstripping on the back edge of the module must be intact and in good condition if it is to prevent water from seeping into the display.
- Module latches must be fully engaged to create a watertight seal around the edge of the module. The module should be firmly seated against the display when the latches are fully engaged.

Each module assembly contains a module housing (containing LEDs and the driver board) and a louver assembly. **Drawings B-126111** and **B-126112** illustrate the various module components.

From time to time, it may become necessary to remove one or more parts from the module housing for repair or replacement. The following subsection explains how to disassemble a module.

Removing the Louver Assembly

Damaged louvers may reduce the brightness and contrast of this display. If any of the louvers on the display are broken or damaged, replace the entire louver assembly. Refer to the Replacement Parts List in **Section 9.9**. When replacing the louver assembly, take care not to strip the plastic twist-on fasteners.

Removing/Changing a Louver

Complete the following steps to remove the louver assembly from the face of the module.

1. See the directions above in the **Module and Drivers** subsection for information on how to access the louver from the front or rear.
2. With an $\frac{11}{32}$ " nut driver, remove the five twist-on fasteners holding the louver assembly to the module.
3. Lift the louver assembly straight away from the module.

Power Supplies

The LED power supplies are identified as assembly 0A-1213-4013 in the component locations drawings.

Removing/Changing a Power Supply

Complete the following steps to remove a power supply from the display:

1. See the directions above in the **Module and Drivers** subsection for information on how to access the component from the front or rear.
2. Disconnect all the wires connected to the power supply.
3. Remove the hardware holding the power supply in place to free the unit.
4. Follow these steps in reverse order to install a new power supply.

Weatherstripping

To ensure that the display is waterproof, weather stripping has been provided around the entire display and around each module. It is important that the weather stripping is installed properly at all times or water may leak into the display and damage the components.

9.6 TNMC Display Maintenance

Complete a yearly inspection to maintain safe and dependable display operation. This inspection should address the following issues:

- **Loose Hardware**
Verify that fasteners, such as bolts and rivets, have not come loose. Check and tighten or replace fasteners as required.
- **Excessive Dust Buildup**
Occasionally, it may be necessary to vacuum the inside of the display cabinet to remove dust/dirt buildup that may interfere with airflow.
- **Water Intrusion – Water Stain Marks**
Water can enter the display where weatherstripping has come loose or deteriorated; where fasteners have come loose, allowing gaps in the panels; or where moisture may be entering around hardware. Check electronic components for displays of corrosion.
- **Corrosion**
Check the paint, and look for possible corrosion, especially at footings, structural tie points, and ground rods and other types of grounding electrodes.

If you notice any of the preceding conditions, make repairs or take corrective action immediately.

9.7 Troubleshooting

This subsection contains a list of problems common to LED displays. This list does not include every possible symptom but does represent typical situations that may occur.

Symptom/Condition	Possible Cause/Remedy
<i>One or more LEDs on a single module fails to light</i>	<ul style="list-style-type: none"> ▪ Check/replace the ribbon cables on the module. ▪ Replace the module.
<i>One or more LEDs on a single module fails to turn off</i>	<ul style="list-style-type: none"> ▪ Check/replace the ribbon cables on module. ▪ Replace the module.
<i>A section of the display is not working; the section extends all the way to the right side of the display</i>	<ul style="list-style-type: none"> ▪ Replace the first module/driver on the left side of the first module that is not working. ▪ Replace the second module that is not working. ▪ Replace the power supply assembly on the first module that is not working. ▪ Replace the ribbon cable.
<i>One row of modules does not work or is garbled</i>	<ul style="list-style-type: none"> ▪ Replace the first module. ▪ Replace the controller.
<i>A group of modules which share the same power supply assembly fails to work</i>	<ul style="list-style-type: none"> ▪ Replace the power supply assembly.
<i>Entire display fails to work</i>	<ul style="list-style-type: none"> ▪ Check for proper line voltage into the power termination panel. ▪ Check/replace the ribbon cable from the controller to the modules. ▪ Check the voltage settings on the power supplies. ▪ Check/replace the signal cable to the controller. ▪ Replace the controller. ▪ Verify proper use of the software in the operation manual.

9.8 Initialization Information at Startup

Every time the display is powered up, the display will run through an initialization in which it will test all LEDs and addresses. When completed, the initialization test will display Home and Guest in the appropriate location.

9.9 Replacement Parts List

The following table contains some of the TNMC components that may require replacement over the life of a display. Many of the components within the display also have attached part number labels.

Part Description	Part Number
Controller II	0A-1146-0061
Current loop interface card, coated	0P-1146-0020
Module; 3R, 8x8 coated type 1 (red, 3 LED/pixel)	0A-1208-3002
Power supply assembly (A-1633)	0A-1213-4013
Modem jack; 6-pin female	J-1094
Cable; 36" RJ-11; 6-conductor	0A-1120-0160
Ribbon cable; 40-conductor, 30 AWG (controller to module, module to module)	W-1412
Cable; 22 AWG	W-1234
Electrical contact cleaner/lubricant (CaiLube)	CH-1019

To prevent theft Daktronics recommends purchasing a lockable cabinet to store manuals and replacement and spare parts.

Refer to **Section 8.9** for information on the Daktronics Exchange and Repair and Return programs.

Section 10: Scoreboard Options

This section lists information on optional equipment for the outdoor LED scoreboards.

10.1 Football Scoreboard Accessories

The following options are available for the Daktronics football scoreboard. They make the scoreboard more adaptable to scoring and timing needs:

- Caption kits for additional sports
- Trumpet horn for football and soccer
- Radio control

10.2 Captions for Other Sports

Reference Drawings:

Caption Options, Baseball & Softball.....	Drawing A-44431
Caption Options, Track.....	Drawing A-44432
Caption Options, Soccer	Drawing A-101442
Caption Options, Football.....	Drawing A-128281
Caption Changing.....	Drawing A-44549

Many scoreboards that have clock digits may use optional captions that allow them to score different sports.

- **Drawing A-44431** shows the optional **baseball** and **softball** caption sets available for use on **football** scoreboards.
- **Drawing A-44432** shows the optional **track** caption sets available for use on **football** scoreboards.
- **Drawing A-101442** shows the optional **soccer** caption sets available for use on **football** scoreboards.
- **Drawing A-128281** shows the optional **football** caption sets available for use on **soccer** scoreboards.

Installing and Changing Captions

Standard captions are applied directly to the face of the scoreboard. Optional captions are on changeable panels that fit into guides mounted above and below the standard captions. If the guides are not already installed, attach them to the scoreboard as shown in **Drawing A-44549**.

To install a changeable panel:

1. Insert the top of the panel into the upper retainer.
2. Lift the panel all the way up into the retainer.
3. Insert the bottom of the panel into the lower retainer.
4. Reverse this procedure to remove the caption panel.

An optional caption changer is available for installing and removing panels from the ground. Each caption panel is punched with keyholes. Screw heads on the crossbar of the caption changer fit into the keyholes. The caption changer pole consists of three sections, with a ring tightener to adjust for length. Loosen the ring to extend the pole to the desired length; tighten the ring for pole use.

👉 CAUTION! 👉

- *The aluminum caption changer can conduct electricity. Do not use it within 20 feet of power lines.*
- *Be careful when using the caption changer in high or gusting winds. Wind may catch the panel and unhook it from the changer. The surface area of the caption panel could also act as a sail, making it difficult to maintain a grip on the pole. Hold the pole tightly and be careful to maintain your balance when using the caption changer in windy situations.*

10.3 Trumpet Horn

Reference Drawings:

120V DC Horn Mounting	Drawing A-162100
Horn Installation; 12V DC	Drawing A-162102
Schematic, Outdoor Scbd 12VDC Trumpet Horn AS5K	Drawing A-128938
Schematic; 120VAC Trumpet Horn	Drawing A-132173

Trumpet horn options are available for installation only on scoreboards with clocks. There are two types of trumpet horns:

- Internally mounted 120 V trumpet horn
- Externally mounted 12 V DC trumpet horn

120 V Trumpet Horn Installation (Internally Mounted)

Caution: Disconnect scoreboard power before installing the horn!

Refer to **Drawings A-162100** and **A-132173** for complete installation information. Note that the horn can be mounted at either the top or the bottom of the scoreboard. The instructions below describe a horn mounting on the display's lower extrusion; reverse the horn positioning for a top-of-scoreboard installation. Power connections for the horn kit are installed at the factory.

1. Unscrew and remove the trumpet from the horn body.
2. Mount the horn body to the bracket with the 1/4" bolts and nuts provided. Be sure that the horn is oriented so that the wire opening is at the bottom.
3. Mount the bracket to the bottom frame member using #10 screws. There are two holes in the frame for this purpose.
4. Connect the wires with a white plug to the mating jack on the horn interconnect harness. The interconnect cable itself extends from a jack marked **HORN** or **J101** on the right side of the driver enclosure.

5. Close and secure the access panel.
6. Screw the trumpet into the horn body. The trumpet will tilt down about 10 degrees to allow moisture drainage.
7. Connect to power to the scoreboard.
8. Connect the control console to the scoreboard.
9. Test the horn by pressing the key labeled **HORN** on the control console.

DC Trumpet Horn Installation (Externally Mounted)

Caution: Disconnect scoreboard power before installing the horn!

Refer to **Drawings A-128938** and **A-162102** for complete installation information. With single-section scoreboards, the external horn mounting location is above the center-most door. If the horn is ordered with a new scoreboard, the horn power enclosure assembly (*Steps 3, 4, and 5, below*) will be factory-installed, already attached to the interior back panel of the scoreboard. If the horn is added later, attachment of the horn power enclosure assembly will be part of the installation. In either case, the horn interconnect harness is also factory-installed and ready for the final attachment with the horn.

1. Locate the horn panel near the top of the scoreboard. Refer to the component locations drawings listed in **Section 4**. Note that there is a 2" knockout in this panel.
2. Loosen the screws securing the bottom of the panel and swing it open.
3. *Note: This step and the next two are not required if the horn is ordered as original equipment; these procedures will be completed at the factory.* In the interior back panel of the scoreboard, drill two $\frac{5}{32}$ " holes 4" apart. (The holes may have been pre-drilled at the factory.) These screw holes will be used to attach the horn power enclosure assembly, so they should be located within reach of the 2" knockout in the horn panel. Refer to the **Figure 3** detail on **Drawing A-162102**.
4. Attach the horn power enclosure assembly to the inside of the scoreboard, using #10 tapping screws in the $\frac{5}{32}$ " holes.
5. Attach the plate assembly to the horn enclosure using the #10 hardware provided.
6. Remove the 2" knockout in the horn access panel. Note that there are two $\frac{7}{32}$ " holes on either side of the knockout.
7. Thread the two gray wires from the horn through the top of the mounting angle.
8. Attach the horn to the mounting angle using the #10 hardware provided.
9. Insert the bushing into the $\frac{3}{8}$ " hole in the mounting angle.
10. Place the horn/angle assembly over the 2" knockout and $\frac{7}{32}$ " holes in the front panel of the scoreboard. Attach the assembly using the #10 hardware provided.
11. Open the front panel and remove the cover from the horn enclosure.
12. Use the wire nuts provided to attach one gray wire from the horn to the black wire from the plate assembly. Connect the second gray wire from the horn to the red wire from the plate assembly.
13. Connect the wires with a white plug to the mating jack on the horn interconnect harness. The interconnect cable itself extends from the jack marked **HORN** or **J101** on the right side of the driver enclosure.
14. Close and secure the access panel.
15. Connect to power to the scoreboard.
16. Connect the control console to the scoreboard.
17. Test the horn by pressing the key labeled **HORN** on the control console.

10.4 Radio Control

Radio control is an option with all Daktronics outdoor LED scoreboards, the system providing display control via a 2.4 GHz, extra-high frequency FM signal.

The radio transmitter and receiver are not standard equipment. This setup requires a control console such as the All Sport, equipped with radio output. The display receives control signal via a radio receiver mounted internally to the front panel. The receiver plugs into the power receptacle in the driver/power enclosure.

For additional information about this option, contact your Daktronics representative; for complete information on radio communications, refer to the All Sport 5000 Series or All Sport 3000 Series control console operation manuals, **ED11976** and **ED12126**.

Appendix A: Reference Drawings


A Drawings

Segmentation, 7 Segment Bar Digit	Drawing A-38532
Multiple Section Football Scbd Models	Drawing A-42148
Display Mounting.....	Drawing A-44412
Caption Options, Baseball & Softball.....	Drawing A-44431
Caption Options, Track	Drawing A-44432
Beam & Footing Recommendations, FB-XX24	Drawing A-44514
Beam & Footing Recommendations, FB-XX30	Drawing A-44515
Lifting Scoreboard.....	Drawing A-44548
Caption Changing	Drawing A-44549
Structure, Football.....	Drawing A-44556
Ad Panel Mounting.....	Drawing A-52187
Installation Specifications, BA-1518	Drawing A-55008
Beam Spacings, Football/Track/Soccer	Drawing A-70089
Multiple Section Football Scbd Models w/TNMC	Drawing A-84233
Beam Spacing; Displays w/TNMC.....	Drawing A-84292
Multiple Section Soccer Scbd Models	Drawing A-98161
Caption Options, Soccer	Drawing A-101442
Display Mounting Straps, BA-3718.....	Drawing A-114415
Address Table, 1 Through 128.....	Drawing A-115078
Mounting Detail; 2 ¹ / ₂ " Matrix.....	Drawing A-115882
Installation Specifications, BA-1524	Drawing A-120972
Multiple Section Baseball Scoreboard Models.....	Drawing A-126086
Multiple Section Baseball Scbd Models w/TNMC	Drawing A-126362
Installation Specifications, BA-3724	Drawing A-126445
Installation Specifications, BA-3718	Drawing A-126455
Installation Specifications, FB-2002 & FB-2003	Drawing A-128044
Multiple Section Soccer Scbd Models w/TNMC.....	Drawing A-128172
Multiple Section Multisport Scbd Models	Drawing A-128203
Installation Specifications, MS-2118.....	Drawing A-128206
Caption Options, Football.....	Drawing A-128281
Schematic, Outdoor Scbd 12VDC Trumpet Horn AS5K	Drawing A-128938
Schematic; 120VAC Trumpet Horn	Drawing A-132173
16 Column LED Driver II Specifications	Drawing A-134371
Digit Assembly (18 and 24").....	Drawing A-135662
Installation Specifications, MS-2009.....	Drawing A-144415
Component Layout; 832/848 LED TNMC	Drawing A-145045
Schematic; Gen II Outdoor LED, 16 Column Drvr	Drawing A-154330
Driver; 16 Col Outdoor LED, Gen II.....	Drawing A-154792
Component Locations; BA-1518-11	Drawing A-157670
Component Locations; BA-1524-11	Drawing A-157842
Schematic; Gen II OD LED, 3 Drvr, Multi-Sect & TNMC	Drawing A-158084
Component Locations; BA-3718-11	Drawing A-158402
Component Locations; BA-3724-11	Drawing A-158416
Schematic; LED TNMC, Gen II	Drawing A-158552
Beam and Footing Recommendations, FB-XX30L.....	Drawing A-158779
Schematic; Gen II, OD LED, 1 Drvr Display & TNMC.....	Drawing A-159419


Component Locations; BA-3724-11 w/848-10 TNMC.....	Drawing A-159615
Schematic; Gen II, OD LED, 3 Drvr Display	Drawing A-159920
Schematic; Gen II, OD LED, 3 Drvr Display & TNMC	Drawing A-159921
Schematic; Gen II, OD LED, 3 Drvr, Multi-Sect.....	Drawing A-159923
Schematic; Gen II, OD LED, 2 Drvr Display	Drawing A-159999
Schematic; Gen II, OD LED, 2 Drvr Display & TNMC	Drawing A-160547
Component Locations; BA-2007-11	Drawing A-160564
Component Locations; FB-1424-11	Drawing A-160605
Component Locations; FB-1524-11	Drawing A-160628
Component Locations; FB-1624-11	Drawing A-160644
Beam and Footing Recommendations, FB-200X	Drawing A-160931
Component Locations; FB-1430-11	Drawing A-161107
Component Locations; FB-1530-11	Drawing A-161113
Component Locations; FB-1630-11	Drawing A-161157
30" Amber LED Digit Assembly.....	Drawing A-161254
Component Locations; SO-1424-11	Drawing A-161277
Component Locations; FB-1730-11	Drawing A-161281
Component Locations; FB-1830-11	Drawing A-161293
120V DC Horn Mounting	Drawing A-162100
Horn Installation, 12V DC.....	Drawing A-162102
Component Locations; FB-2001-11	Drawing A-162141
Component Locations; FB-2004-11	Drawing A-162146
Component Locations; FB-1630L-11	Drawing A-162293
Component Locations; FB-1830L-11	Drawing A-162322
Component Locations; FB-2002-11	Drawing A-162558
Component Locations; FB-2003-11	Drawing A-162738
Component Locations; SO-1624-11.....	Drawing A-162857
Component Locations; SO-1830-11.....	Drawing A-162948
Component Locations; SO-1930-11.....	Drawing A-162951
Component Locations; SO-1830L-11.....	Drawing A-163055
Component Locations; MS-2009-11.....	Drawing A-163509
Component Locations; MS-2118-11.....	Drawing A-163616
Component Locations; BA-1524-11 w/LED TNMC.....	Drawing A-165898
Component Locations; CR-2001-11.....	Drawing A-166250
Installation Specifications, CR-2001-11.....	Drawing A-166286
Component Locations, MS-2918-11.....	Drawing A-172038
Installation Specifications, MS-2918	Drawing A-172188
Component Locations, FB-2001-11 w/LED TNMC.....	Drawing A-172659
Interconnect Panel Digit Designation; FB Displays	Drawing A-174754
Component Locations; FB-2004-11 w/LED TNMC.....	Drawing A-177842

B Drawings

Control Layout; Outdoor LED TNMC.....	Drawing B-107507
Exploded Front, Module	Drawing B-126111
Exploded Rear, Module.....	Drawing B-126112
F. Assy; 832 LED TNMC.....	Drawing B-159055
F. Assy; 848 LED TNMC.....	Drawing B-159081
Schematic; Gen II, OD LED, BA-2007 w/TNMC.....	Drawing B-160180

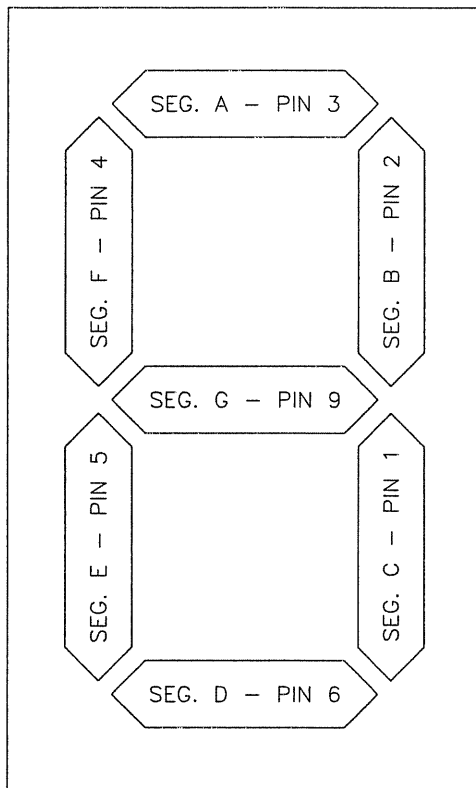


7 SEGMENT BAR DIGIT
FRONT VIEW

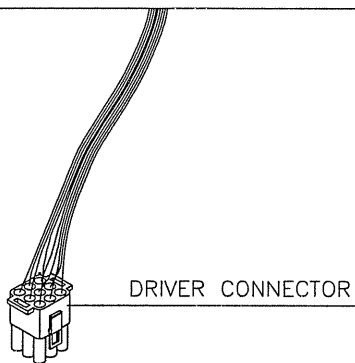

COLOR CODE		
PIN NO.	WIRE COLOR	DRIVER SEGMENT
1	ORN	C
2	RED	B
3	BRN	A
4	BLU	F
5	PNK	E
6	TAN	D
7	BLK	COM.
8	GRY	H
9	VIO	G

CONNECTOR PIN NUMBERING

NOTE SPLINE NEAR NO. 1

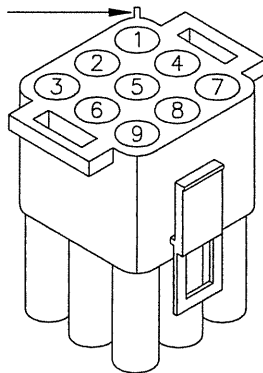

NOTE: "H" SEGMENT, GRAY WIRE IS NOT USED ON 7 SEGMENT BAR DIGIT.


THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2003 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006


REV.	DATE	DESCRIPTION	BY	APPR.
2	30 APR 97	ADDED SEGMENT DESIGNATIONS TO DIGIT FIGURE.	AVB	AVB
1	2 JAN 92	CHANGED FROM B-SIZE TO A-SIZE DWG.	C FICK	

PROJ: BASKETBALL	
TITLE: SEGMENTATION, 7 SEGMENT BAR DIGIT	
DES. BY:	DRAWN BY: HEIDERSCHIEDT DATE: 5 JUN 89
REVISION	APPR. BY: AVB
02	SCALE: 1=4


1009-R04A-38532

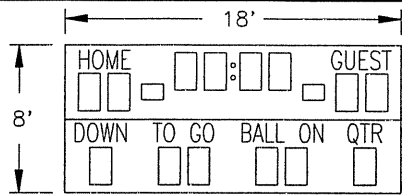


FB-1424

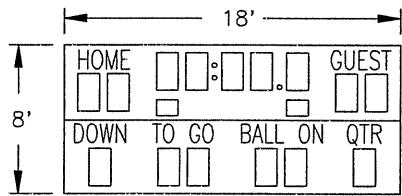


FB-1524

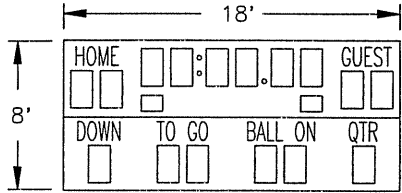


FB-1624

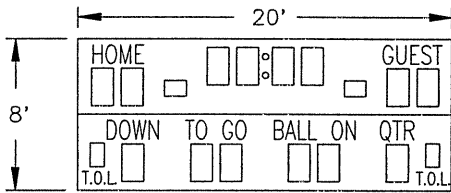


FB-2002

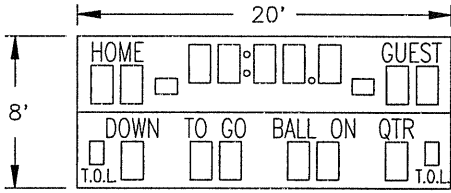


FB-2003

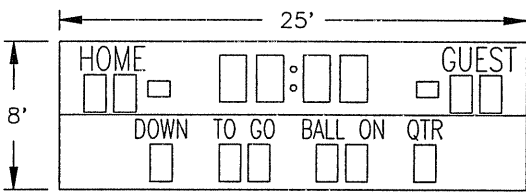


FB-1430

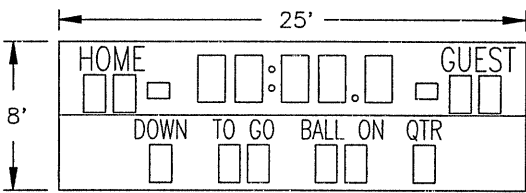


FB-1530

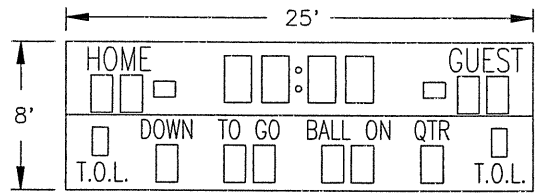


FB-1630

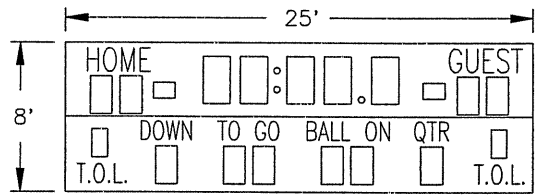


FB-1730

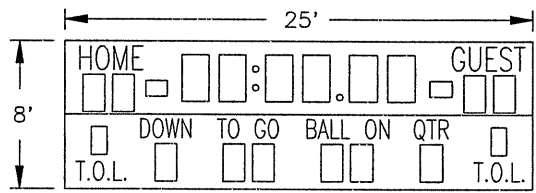


FB-1830

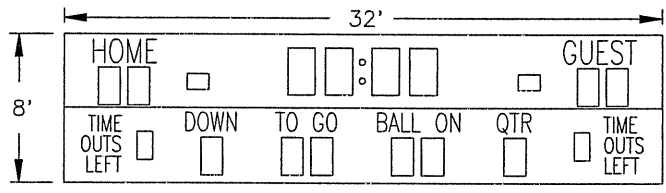

FB-1630L

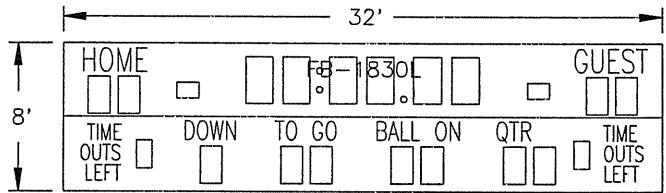

FB-1830L

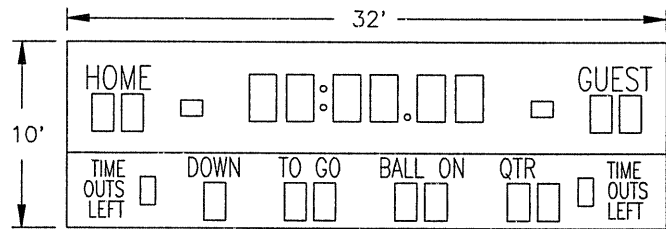


FB-2001

5	06APR98	CHANGED INDICATORS ON FB-1524	BDP	
4	03 NOV 97	REMOVED MODELS SO-824, SO-1424, AND SO-1624.	MWJ	
3	12APR95	ADDED MODELS SO-824, SO-1424, AND SO-1624.	AVB	AVB
2	23FEB94	ADDED FB-1624.	CFICK	
1	23AUG90	CHANGED POSS INDICATOR ON FB-1524 TO THREE LAMPS EACH. CHANGED ALL POSS INDICATORS TO SHOW LAMPS.	AVB	


8	16MAR00	ADDED FB-2002 AND FB-2003	GBREE	
7	22FEB00	REMOVED FB-824	BDP	
6	16JUL98	ADDED FB-2001	JLK	
REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OUTDOOR INCANDESCENT SCOREBOARDS	
TITLE: MULTIPLE SECTION FOOTBALL SCBD MODELS	
DES. BY:	DRAWN BY: AVB DATE: 06AUG90
REVISION	APPR. BY:
	SCALE: 1=120
1091-R08A-42148	

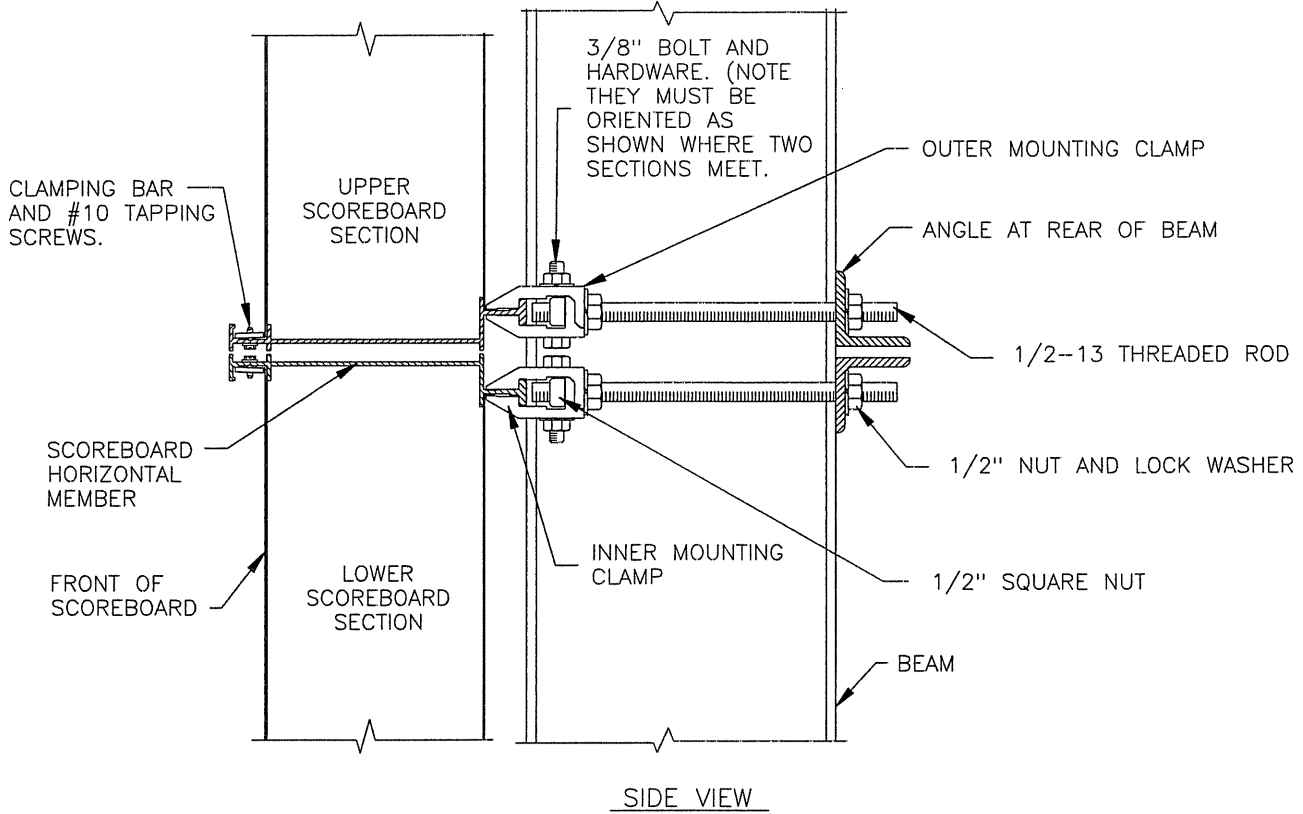


SIDE VIEW

NOTE: CLAMPING BARS AND HARDWARE MAY HAVE TO BE REMOVED IN ORDER TO INSTALL THE INNER AND OUTER MOUNTING CLAMPS.

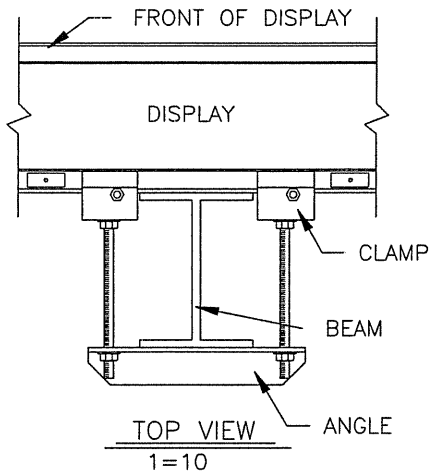


- THREADED RODS RUN ALONG BOTH SIDES OF BEAM.
- THEY DO NOT PASS THROUGH THE FLANGES OF THE BEAM.
- NO DRILLING IS NECESSARY.

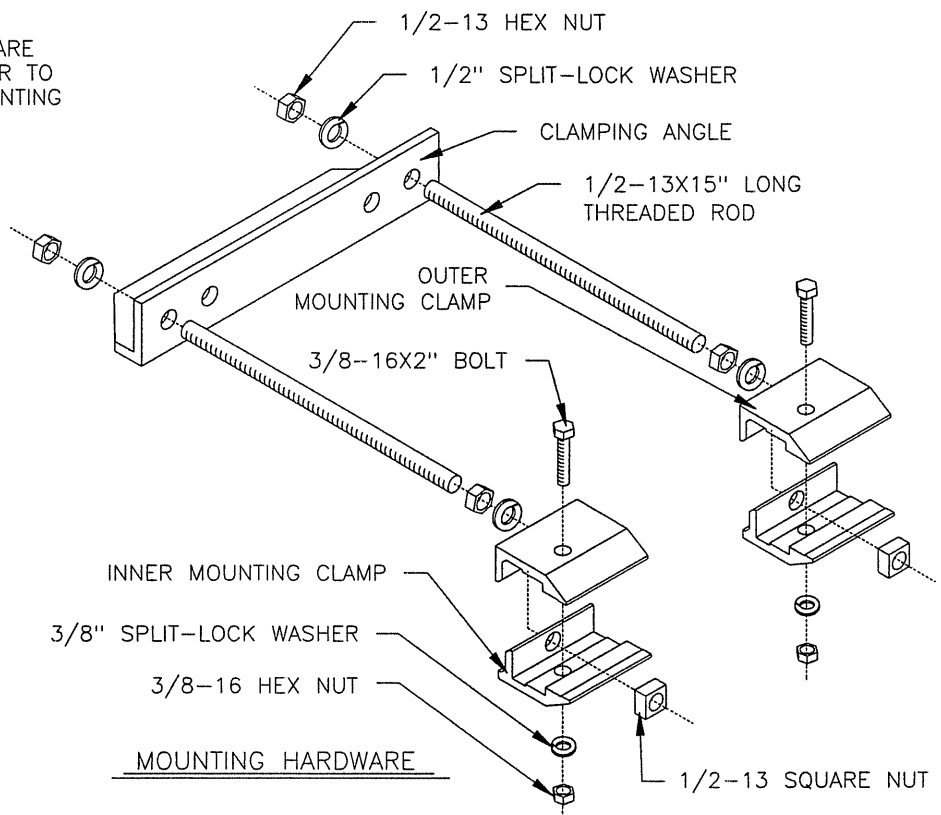


MOUNTING HARDWARE

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR SCOREBOARDS			
TITLE: DISPLAY MOUNTING			
DES. BY: JHEIDERSCHIEDT		DRAWN BY: JHEIDERSCHIEDT DATE: 29AUG90	
REVISION	APPR. BY:	1091-R10A-44412	
	SCALE: 1=5		


REV.	DATE	DESCRIPTION	BY	APPR.

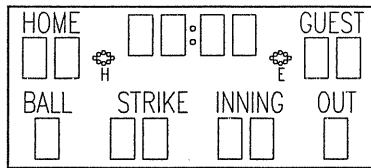


FB-1424

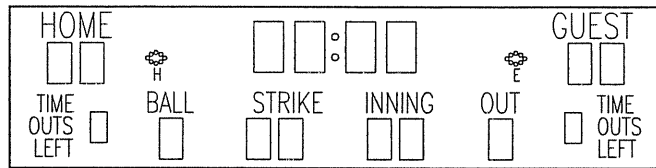


FB-1630L

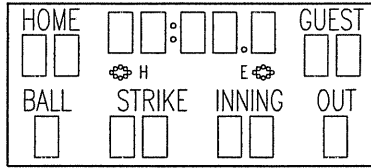


FB-1524

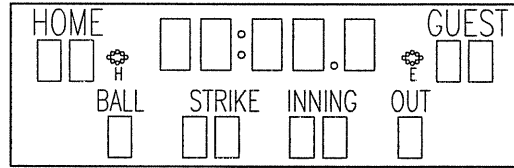

FB-1530

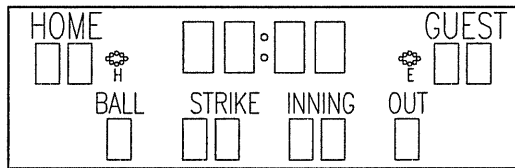


FB-1430

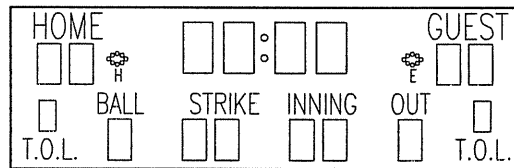


FB-1630


DISPLAYS SHOWN WITH BASEBALL/SOFTBALL CAPTIONS WITH CLOCK OPTION

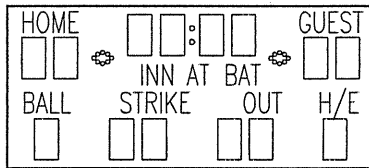


FB-1424

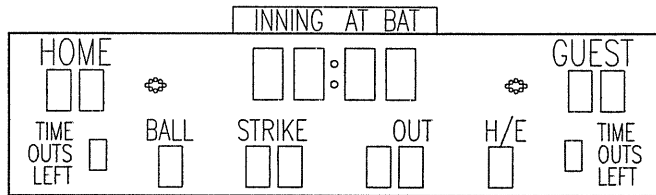


FB-1630L

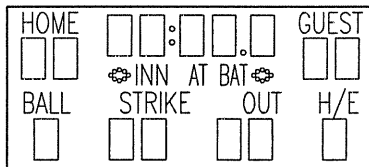


FB-1524

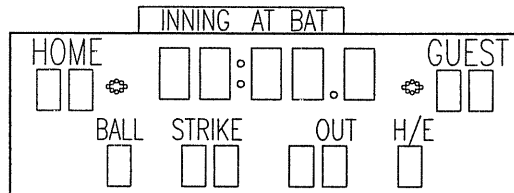

FB-1530

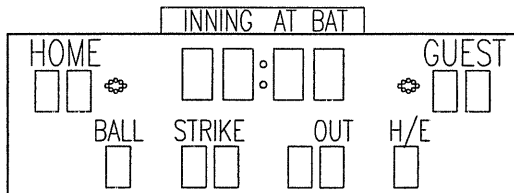

FB-1430

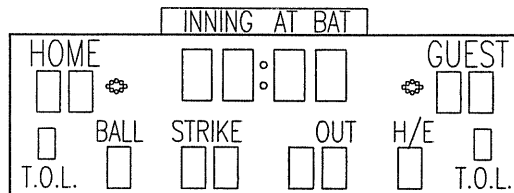

FB-1630

DISPLAYS SHOWN WITH BASEBALL/SOFTBALL CAPTIONS WITHOUT CLOCK

REV.	DATE	DESCRIPTION	BY	APPR.
05	28OCT04	MOVED H AND E CAPTION BELOW INDICATOR	MCOPL	
4	21FEB00	REMOVED CODES.	BDP	
3	06APR98	CHANGED FB-1524 INDICATORS	BDP	
2	30DEC92	SWAPPED "INNING" AND "OUT" CAPTIONS ON CODE 30 AND 32.	AVB	AVB
1	18SEP90	CENTERED "STRIKE" CAPTION OVER DIGITS OF CODE 33/39 DISPLAYS.	JLH	AVB

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2004 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006


PROJ: OUTDOOR INCANDESCENT SCOREBOARDS

TITLE: CAPTION OPTIONS, BASEBALL & SOFTBALL


DES. BY: DRAWN BY: JHEIDERSCHIEDT DATE: 30AUG90

REVISION 05 APPR. BY: SCALE: 1=110


1091-R08A-44431

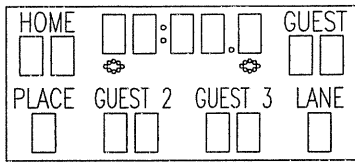


FB-1524

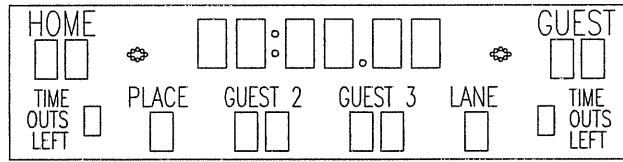


FB-1830L

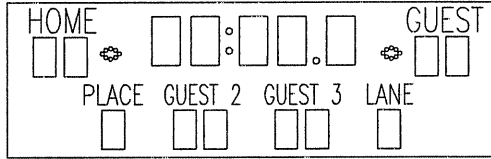


FB-1530

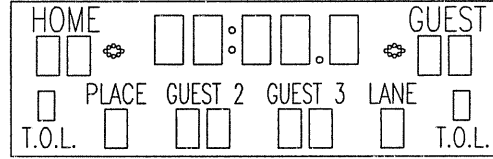

FB-1730 AND FB-2003

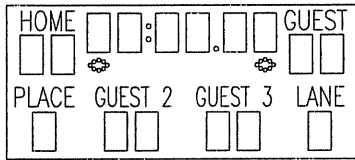


FB-1624

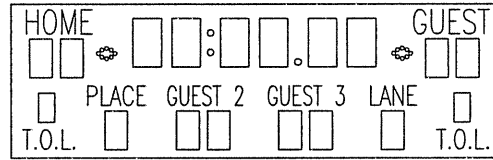


FB-1830


DISPLAYS SHOWN WITH GUEST 2/GUEST 3 TRACK CAPTIONS

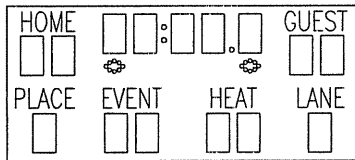


FB-1524

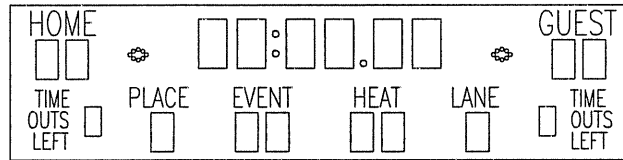


FB-1830L

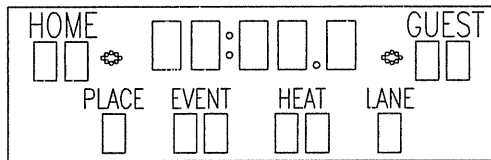


FB-1530

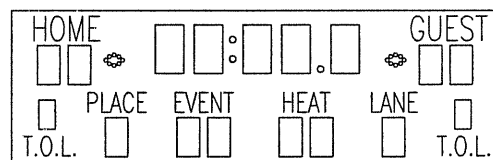

FB-1730 AND FB-2003

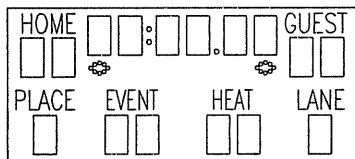

FB-1624

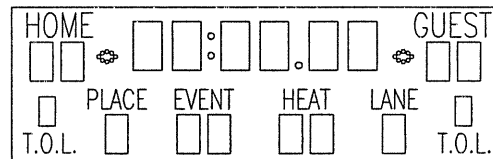

FB-1830

DISPLAYS SHOWN WITH EVENT/HEAT TRACK CAPTIONS


5	17MAR00	ADDED FB-2003	GBREE	
4	21FEB00	REMOVED CODES.	BDP	
3	22OCT98	UPDATED FB-1524 INDICATORS	BDP	
2	19APR96	CORRECTED "HEAT" CAPTION ON FB-1624.	AVB	AVB
REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OUTDOOR INCANDESCENT SCOREBOARDS	
TITLE: CAPTION OPTIONS, TRACK	
DES. BY:	DRAWN BY: JHEIDERSCHIEDT DATE: 30AUG90
REVISION	APPR. BY:
	SCALE: 1=110
1091-R08A-44432	

MODELS FB-1424/1524/1624/2007

DISTANCE TO BOTTOM OF SCOREBOARD (FT)	DOES SCOREBOARD HAVE ATTACHED AD PANEL?	DESIGN WIND VELOCITY (MPH)			
		70	80	90	100
A					
10	NO	W8x28 3.00 X 5.60	W8x31 3.00 X 6.20	W10x33 3.00 X 6.80	W8x35 3.00 X 7.30
	YES	W10x39 3.00 X 6.80	W12x45 3.00 X 7.50	W8x48 3.00 X 8.20	W12x53 3.00 X 8.80
12	NO	W8x31 3.00 X 5.90	W10x33 3.00 X 6.50	W10x39 3.00 X 7.10	W8x40 3.00 X 7.60
	YES	W12x45 3.00 X 7.10	W8x48 3.00 X 7.80	W12x53 3.00 X 8.50	W12x58 3.00 X 9.20
14	NO	W8x35 3.00 X 6.20	W10x39 3.00 X 6.80	W12x45 3.00 X 7.40	W8x48 3.00 X 8.00
	YES	W8x48 3.00 X 7.4	W12x53 3.00 X 8.10	W12x58 3.00 X 8.80	W12x65 3.00 X 9.60
16	NO	W10x39 3.00 X 6.40	W12x45 3.00 X 7.10	W8x48 3.00 X 7.70	W12x53 3.00 X 8.30
	YES	W10x49 3.00 X 7.60	W12x58 3.00 X 8.40	W12x65 3.00 X 9.10	W12x72 3.00 X 9.80
18	NO	W12x45 3.00 X 6.60	W8x48 3.00 X 7.30	W12x53 3.00 X 8.00	W12x58 3.00 X 8.60
	YES	W10x54 3.00 X 7.80	W12x65 3.00 X 8.60	W12x72 3.00 X 9.40	W10x77 3.00 X 10.10
20	NO	W8x48 3.00 X 6.90	W10x49 3.00 X 7.60	W12x58 3.00 X 8.30	W12x65 3.00 X 8.90
	YES	W10x60 3.00 X 8.10	W10x68 3.00 X 8.90	W10x77 3.00 X 9.70	W12x87 3.00 X 10.50

W6x12 ← RECOMMENDED BEAM SECTION FOR MOUNTING SCOREBOARD
 2.00 X 4.25 ← RECOMMENDED FOOTINGS IN FEET (DIAMETER X DEPTH)

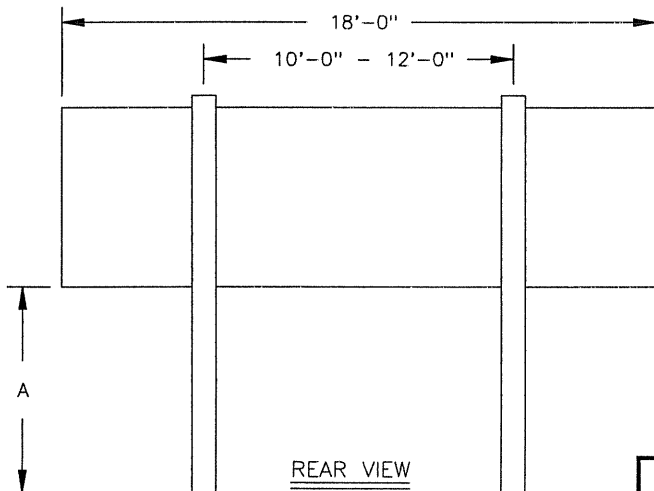

NOTE:
 RECOMMENDATIONS FOR A DISPLAY WITH AN ATTACHED AD PANEL WERE CALCULATED USING A 48" TALL AD PANEL.

INFORMATION GIVEN IS FOR ESTIMATING PURPOSES ONLY. COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENSED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.


THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2004 DAKTRONICS, INC.

REV.	DATE	DESCRIPTION	BY	APPR.
03	07MAY04	ADDED MODEL FB-2007	MCOPL	
2	13JUL00	REVISED BEAM SECTIONS & FOOTINGS. ADDED FB-1624 TO MODELS.	MVD	
1	23MAR98	ADDED DISCLAIMER ABOUT FOOTING AND BEAM LIABILITY.	TWEBER	

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: FOOTBALL SCOREBOARDS	
TITLE: BEAM & FOOTING RECOMMENDATIONS, FB-XX24	
DES. BY: JHEIDERSCHIEDT DRAWN BY: JHEIDERSCHIEDT DATE: 07SEP90	
REVISION	APPR. BY:
03	NONE
1091-R08A-44514	

MODELS FB-1430, FB-1530, FB-1630, FB-1730, & FB-1830					
DISTANCE TO BOTTOM OF SCOREBOARD (FT)	DOES SCOREBOARD HAVE ATTACHED AD PANEL?	DESIGN WIND VELOCITY (MPH)			
		70	80	90	100
A					
10	NO	W8x28 3.00 X 5.70	W8x31 3.00 X 6.30	W8x35 3.00 X 6.90	W10x39 3.00 X 7.50
	YES	W10x39 3.00 X 6.90	W12x45 3.00 X 7.60	W8x48 3.00 X 8.30	W12x53 3.00 X 9.00
12	NO	W8x31 3.00 X 6.00	W8x35 3.00 X 6.60	W10x39 3.00 X 7.20	W12x45 3.00 X 7.80
	YES	W12x45 3.00 X 7.20	W8x48 3.00 X 7.90	W10x54 3.00 X 8.70	W10x60 3.00 X 9.30
14	NO	W8x35 3.00 X 6.30	W10x39 3.00 X 6.90	W12x45 3.00 X 7.60	W8x48 3.00 X 8.20
	YES	W8x48 3.00 X 7.50	W12x53 3.00 X 8.30	W10x60 3.00 X 9.00	W12x65 3.00 X 9.70
16	NO	W10x39 3.00 X 6.60	W12x45 3.00 X 7.20	W8x48 3.00 X 7.90	W12x53 3.00 X 8.50
	YES	W12x53 3.00 X 7.70	W10x60 3.00 X 8.50	W12x65 3.00 X 9.30	W12x72 3.00 X 10.00
18	NO	W12x45 3.00 X 6.80	W8x48 3.00 X 7.50	W12x53 3.00 X 8.10	W12x58 3.00 X 8.80
	YES	W12x58 3.00 X 8.00	W12x65 3.00 X 8.80	W12x72 3.00 X 9.60	W12x79 3.00 X 10.30
20	NO	W8x48 3.00 X 7.00	W12x53 3.00 X 7.70	W12x58 3.00 X 8.40	W12x65 3.00 X 9.10
	YES	W12x65 3.00 X 8.30	W12x72 3.00 X 9.10	W12x79 3.00 X 9.90	W12x87 3.00 X 10.70


W6x12 ← RECOMMENDED BEAM SECTION FOR MOUNTING SCOREBOARD
 2.00 X 4.25 ← RECOMMENDED FOOTINGS IN FEET (DIAMETER X DEPTH)

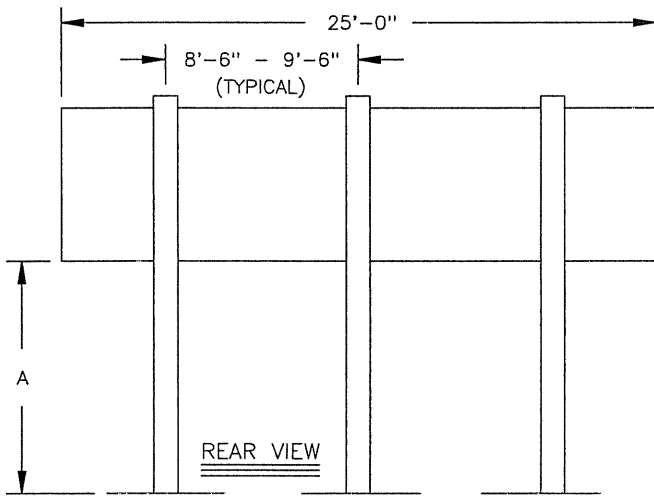

NOTE:
 RECOMMENDATIONS FOR A DISPLAY WITH
 AN ATTACHED AD PANEL WERE CALCULATED
 USING A 48" TALL AD PANEL.

INFORMATION GIVEN IS FOR ESTIMATING
 PURPOSES ONLY. COLUMNS AND FOOTINGS
 MUST BE DESIGNED BY A STATE LICENCED
 ENGINEER. DAKTRONICS DOES NOT ASSUME
 ANY LIABILITY FOR ANY INSTALLATIONS
 DERIVED FROM THIS INFORMATION OR
 DESIGNED AND INSTALLED BY OTHERS.


DAKTRONICS, INC. BROOKINGS, SD 57006				
2	13JUL00	REVISED BEAM SECTIONS & FOOTINGS.	MVD	
1	23MAR98	ADDED DISCLAIMER ABOUT FOOTING AND BEAM LIABILITY.	TWEBER	
REV.	DATE	DESCRIPTION	BY	APPR.
		PROJ: FOOTBALL SCOREBOARDS		
		TITLE: BEAM & FOOTING RECOMMENDATIONS, FB-XX30		
		DES. BY: JHEIDERSCHIEDT DRAWN BY: JHEIDERSCHIEDT DATE: 08SEP90		
		REVISION	APPR. BY:	1091-R08A-44515
			SCALE: NONE	

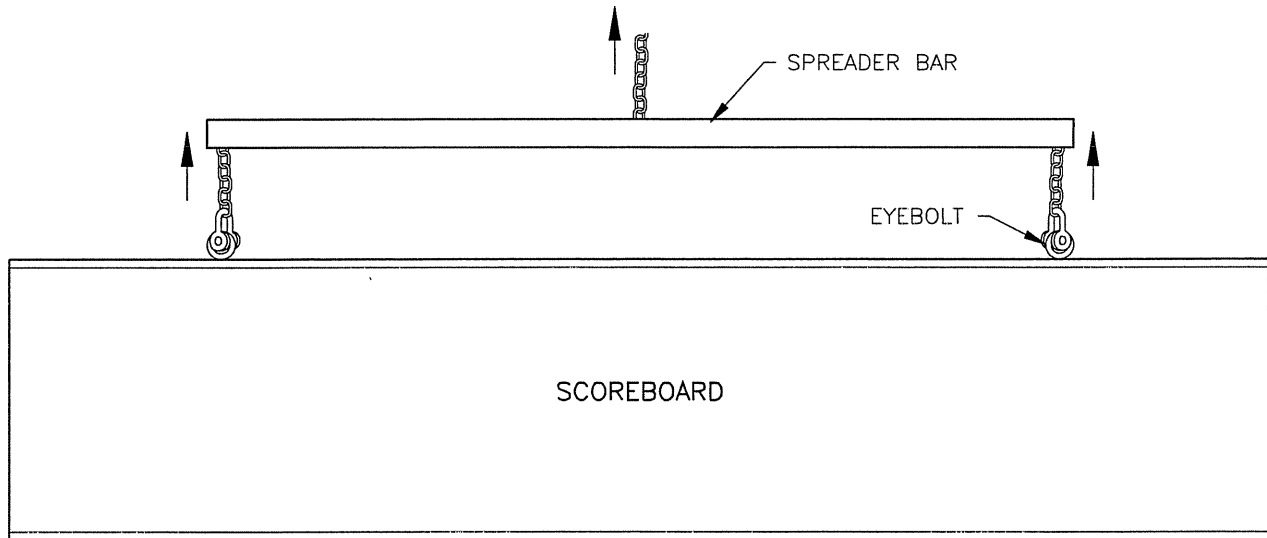

PREFERRED LIFTING METHOD

USE A SPREADER BAR SO THAT THE FORCE ON THE EYEBOLTS IS STRAIGHT UP.

ALTERNATE LIFTING METHOD

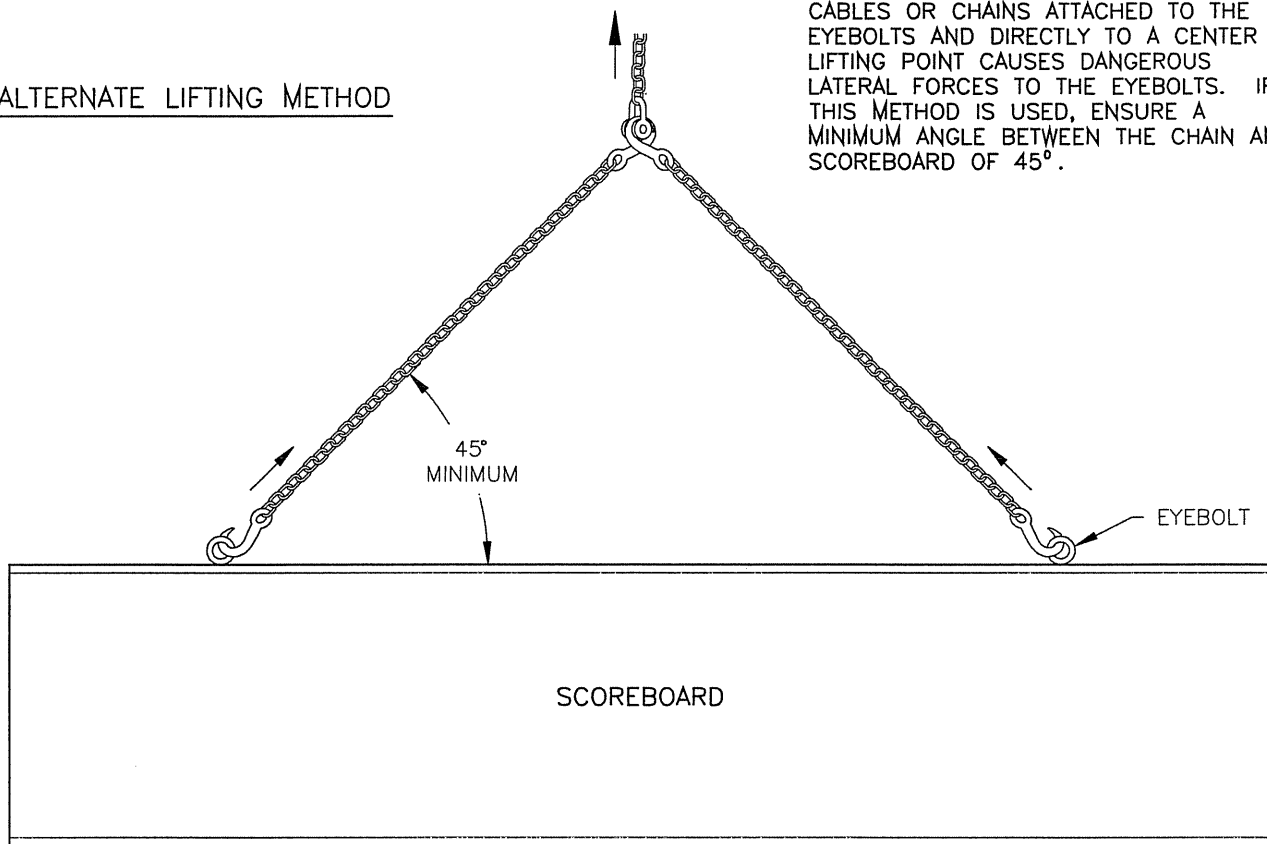

CABLES OR CHAINS ATTACHED TO THE EYEBOLTS AND DIRECTLY TO A CENTER LIFTING POINT CAUSES DANGEROUS LATERAL FORCES TO THE EYEBOLTS. IF THIS METHOD IS USED, ENSURE A MINIMUM ANGLE BETWEEN THE CHAIN AND SCOREBOARD OF 45°.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR SCOREBOARDS			
TITLE: LIFTING SCOREBOARD			
DES. BY:	DRAWN BY: AVB	DATE: 12SEP90	
REVISION	APPR. BY:	1091-R10A-44548	
	SCALE: NONE		

REV.	DATE	DESCRIPTION	BY	APPR.
1	17 MAY 01	ADDED MINIMUM ANGLE TO ALTERNATE LIFTING METHOD; CHANGED CORRECT TO PREFERRED METHOD AND WRONG TO ALTERNATE METHOD	TWEBER	

IF CAPTION GUIDES (RETAINERS) ARE NOT ALREADY ATTACHED TO SCOREBOARD, USE THE SCREWS PROVIDED WITH THE GUIDES (RETAINERS) TO ATTACH THEM AS SHOWN.

NO. 8 SCREW, TAPPING

UPPER CAPTION GUIDE (RETAINER)

INSERT TOP OF PANEL FIRST.

SCREW HEAD

CAPTION PANEL

LOWER CAPTION GUIDE (RETAINER)

HANDLE

FRONT OF SCOREBOARD

USE THE HANDLE TO INSTALL AND REMOVE CAPTION PANELS. ENGAGE SCREW HEADS IN THE HANDLE INTO KEYHOLES IN PANEL. LIFT THE PANEL AND REMOVE BOTTOM FIRST, THEN LOWER THE PANEL.

DANGER
THIS POLE MAY CONDUCT ELECTRICITY. AVOID POWER LINES BY 10 FEET.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR SCOREBOARDS

TITLE: CAPTION CHANGING

DES. BY:

DRAWN BY: AVB

DATE: 19SEP90


REVISION

APPR. BY:


SCALE: NONE

1091-E10A-44549

REV	DATE	DESCRIPTION	BY	APPR.
1	22AUG91	CORRECTED CAPTION CHANGER ILLUSTRATION TO REFLECT ACTUAL DEVICE.	JLH	

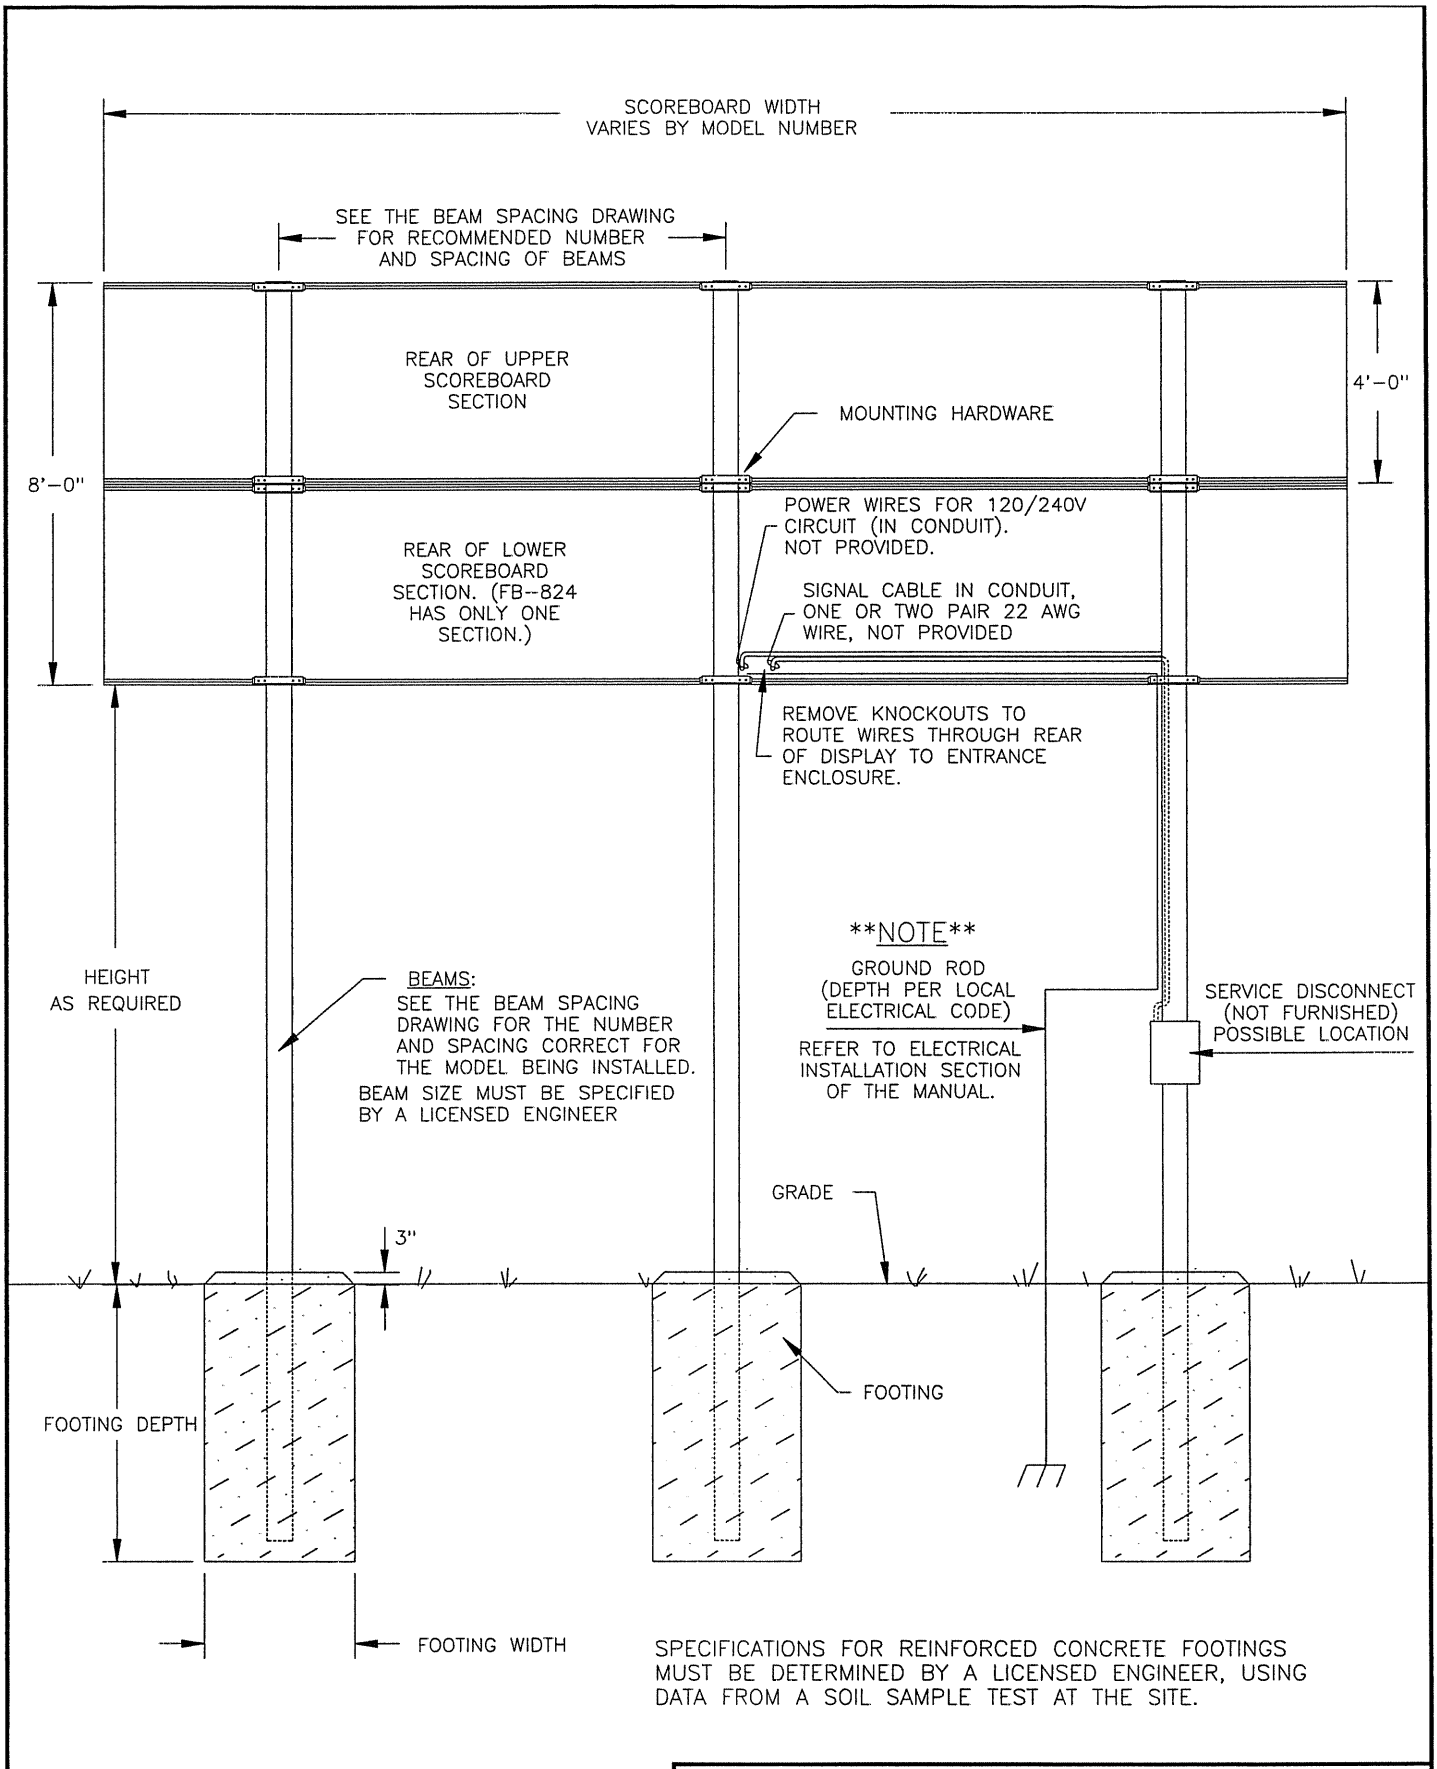

DAKTRONICS, INC. BROOKINGS, SD 57006				
2		28APR95	ADDED NOTE THAT SPECIFICATIONS MUST BE MADE BY A LICENSED ENGINEER.	AVB AVB
1		17SEP90	CORRECTED WIRE SPECIFICATIONS. ADDED GROUNDING ROD REFERENCE.	JLH
REV.	DATE	DESCRIPTION		BY APPR.
PROJ: FOOTBALL SCOREBOARDS TITLE: STRUCTURE, FOOTBALL DES. BY: JHEIDERSCHEIDT DRAWN BY: JHEIDERSCHEIDT DATE: 12SEP90 REVISION APPR. BY: SCALE: 1=45				
				1091-R10A-44556

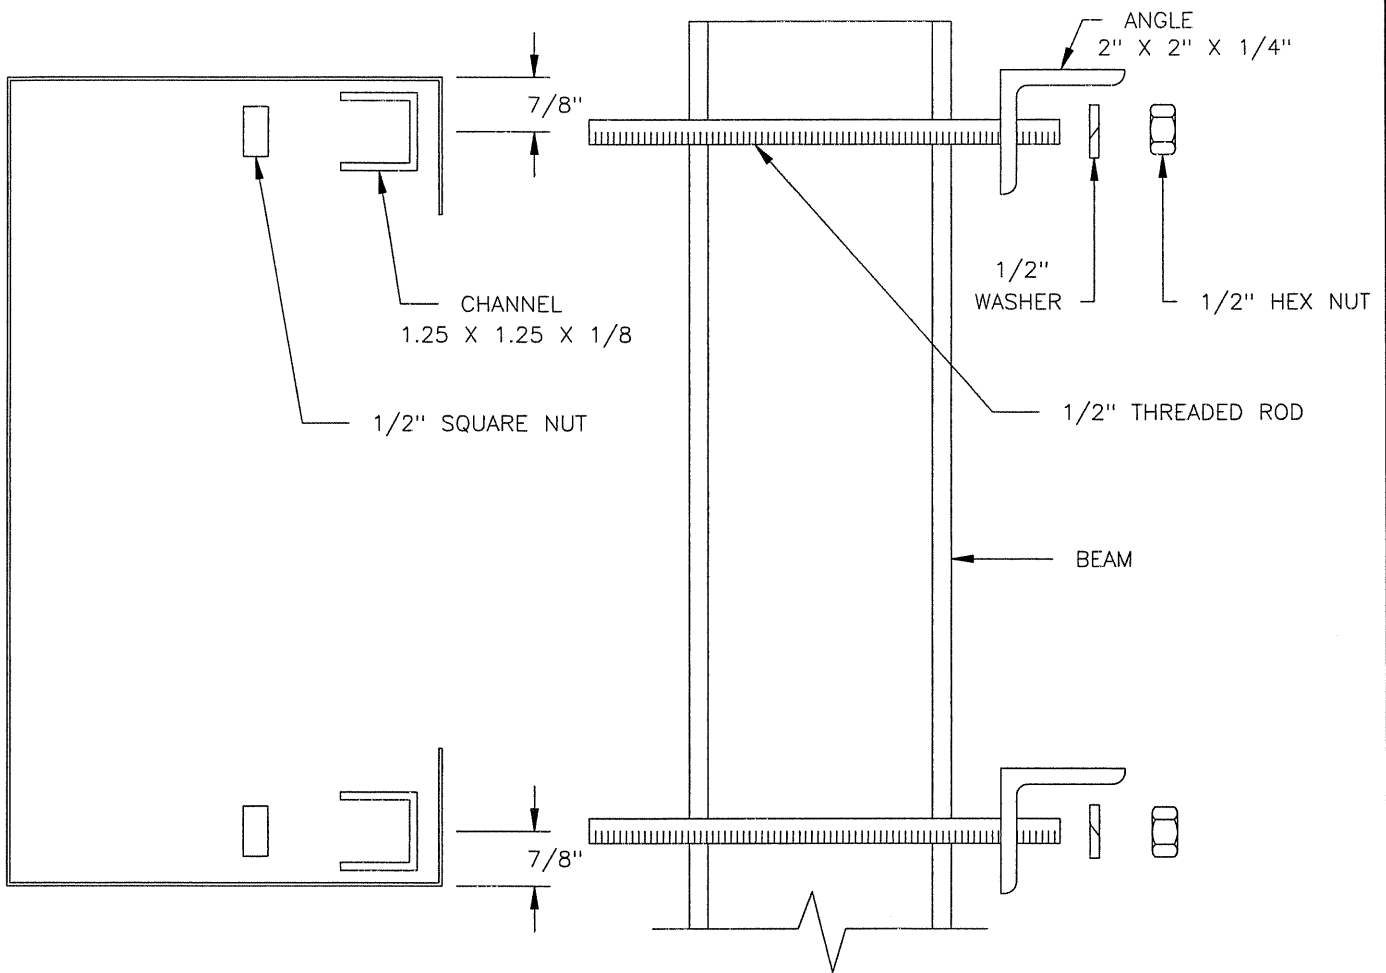


MOUNTING INSTRUCTIONS:

1. USE THE MOUNTING CHANNEL TO DETERMINE WHICH HOLE COMBINATION SHOULD BE USED. BE SURE TO KEEP THE BOLTS AS CLOSE TO THE BEAM AS POSSIBLE.
2. USING THE MOUNTING CHANNEL AS A TEMPLATE, DRILL 9/16" HOLES IN THE UPPER AND LOWER REAR FLANGE OF AD PANEL WHERE THE SUPPORTS WILL GO.
3. PLACE SQUARE NUTS INSIDE CHANNEL AND THREAD BOLTS THROUGH.
4. LIFT AD PANEL INTO POSITION WITH BOLTS STILL IN PLACE.
5. PLACE MOUNTING ANGLES OVER EACH PAIR OF BOLTS AND SECURE WITH LOCK WASHERS AND HEX NUTS.
6. WHEN PANEL IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN HEX NUTS FIRMLY.

MOUNTING INSTRUCTIONS: FOR AD PANELS WITH BACKSHEETS.

1. USE THE MOUNTING CHANNEL TO DETERMINE WHICH HOLE COMBINATION SHOULD BE USED. BE SURE TO KEEP THE BOLTS AS CLOSE TO THE BEAM AS POSSIBLE.
2. USING THE MOUNTING CHANNEL AS A TEMPLATE, DRILL 9/16" HOLES IN THE UPPER AND LOWER REAR FLANGE OF AD PANEL WHERE THE SUPPORTS WILL GO.
3. REMOVE BACKSHEETS IN AREAS ABOVE AND BELOW HOLES DRILLED IN STEP 2.
4. PLACE SQUARE NUTS INSIDE CHANNEL AND THREAD BOLTS THROUGH.
5. REPLACE BACKSHEETS REMOVED IN STEP 3.
6. LIFT AD PANEL INTO POSITION WITH BOLTS STILL IN PLACE.
7. PLACE MOUNTING ANGLES OVER EACH PAIR OF BOLTS AND SECURE WITH LOCK WASHERS AND HEX NUTS.
8. WHEN PANEL IS ADJUSTED TO FINAL DESIRED POSITION, TIGHTEN HEX NUTS FIRMLY.

DAKTRONICS, INC. BROOKINGS, SD 57006				
PROJ: OUTDOOR SCOREBOARDS				
TITLE: AD PANEL MOUNTING				
DES. BY: .		DRAWN BY: MGUNDERSON		DATE: 09JUL92
2	13AUG97	INCLUDED INSTRUCTIONS FOR AD PANELS WITH BACKSHEETS.	JAA	
1	26MAY93	ADDED DESCRIPTION TEXT TO PARTS.	MGG	
REV.	DATE	DESCRIPTION	BY	APPR.
REVISION		APPR. BY:	1091-R10A-52187	
		SCALE: NONE		

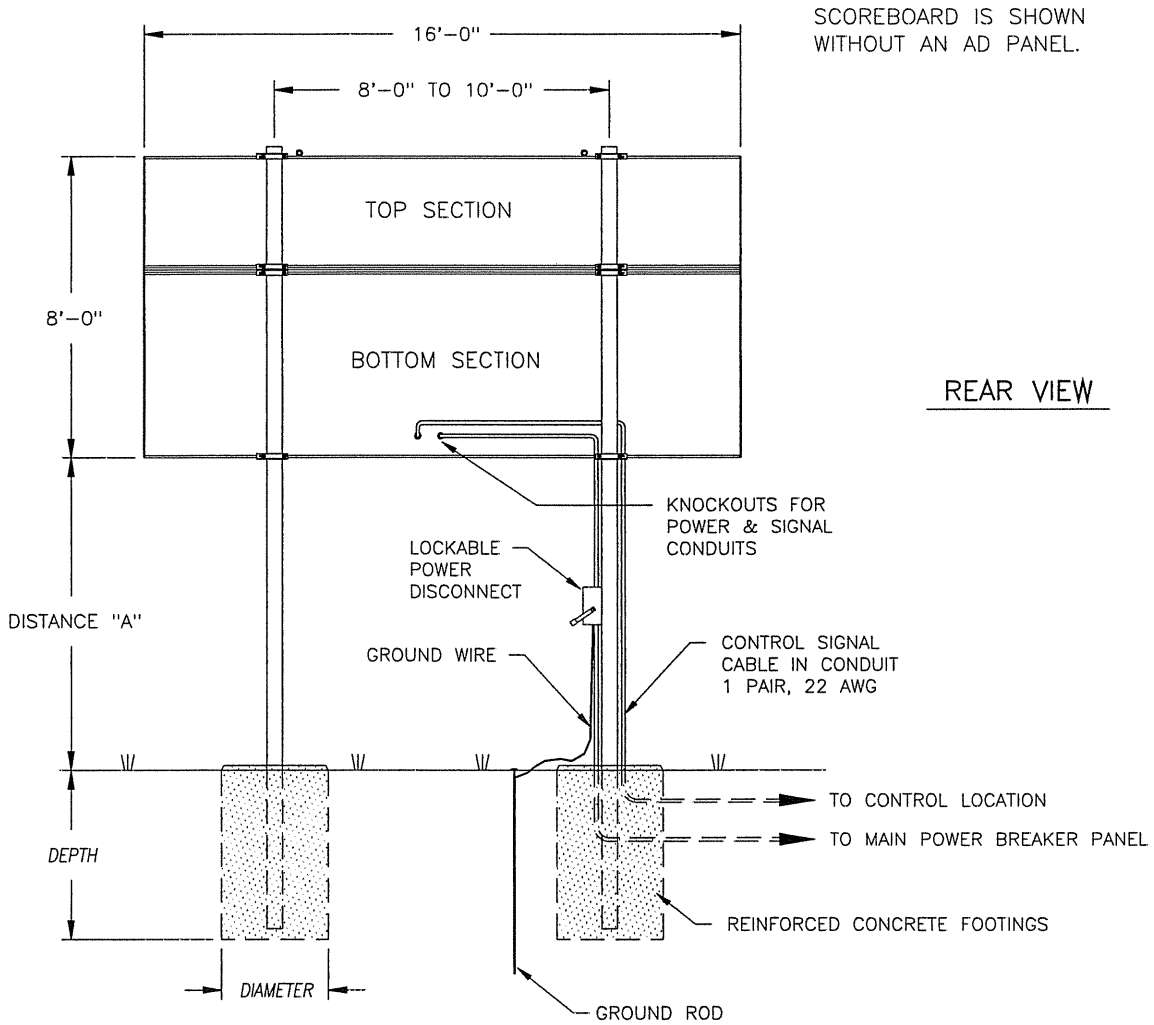

SCOREBOARD IS SHOWN WITHOUT AN AD PANEL.

REAR VIEW

MODEL BA-1518 WITHOUT AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	16'-0" x 8'-0"	BEAM FOOTING	W8x24 3.0' x 5.4'	W8x28 3.0' x 6.0'	W8x35 3.0' x 7.0'
12'-0"	16'-0" x 8'-0"	BEAM FOOTING	W8x28 3.0' x 5.6'	W8x31 3.0' x 6.2'	W10x39 3.0' x 7.3'
14'-0"	16'-0" x 8'-0"	BEAM FOOTING	W8x31 3.0' x 5.9'	W8x35 3.0' x 6.5'	W10x45 3.0' x 7.7'

MODEL BA-1518 WITH 30"-HIGH AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	16'-0" x 10'-6"	BEAM FOOTING	W8x31 3.0' x 6.1'	W8x35 3.0' x 6.7'	W12x45 3.0' x 7.9'
12'-0"	16'-0" x 10'-6"	BEAM FOOTING	W8x35 3.0' x 6.4'	W8x40 3.0' x 7.0'	W8x48 3.0' x 8.3'
14'-0"	16'-0" x 10'-6"	BEAM FOOTING	W10x39 3.0' x 6.6'	W10x45 3.0' x 7.3'	W10x54 3.0' x 8.6'

FOOTING = DIAMETER X DEPTH


FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL BEARING PRESSURE OF 2000 LB/FT²


ACTUAL FOOTING DEPTH AND DIAMETER FOR A PARTICULAR INSTALLATION MUST BE DETERMINED BY A QUALIFIED STRUCTURAL ENGINEER, USING DATA FROM A SOIL SAMPLE TEST AT THE SITE.

DAKTRONICS, INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.


DAKTRONICS, INC. BROOKINGS, SD 57006				
PROJ: OUTDOOR SCOREBOARDS				
TITLE: INSTALLATION SPECIFICATIONS, BA-1518				
DES. BY: AVB		DRAWN BY: A VANBEMMEL		DATE: 04FEB93
REV.	DATE	DESCRIPTION	BY	APPR.
2	19DEC00	REVISED COLUMN SECTIONS & FOOTINGS.	MVD	
1	01 SEPT 99	UPDATE FOOTING AND BEAM SPECS FOR 2000 LB/FT ² .	JNILSE	
REVISION		APPR. BY:		1091-R10A-55008
		SCALE: 1=60		

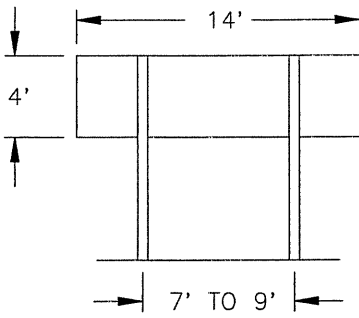


MODELS FB-824, SO-824

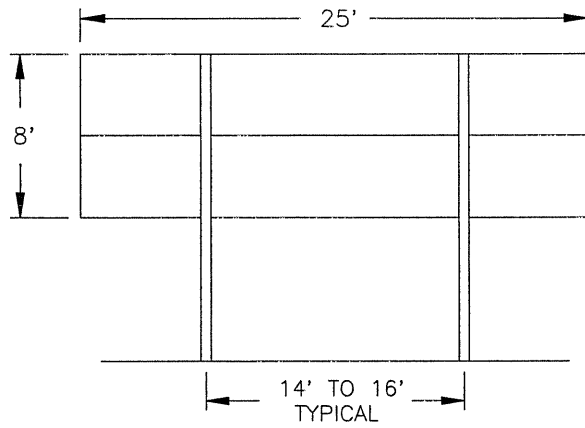


MODELS FB-1430, FB-1530,
FB-1630, FB-1730,
FB-1830, SO-1830, SO-1930
SO-2030

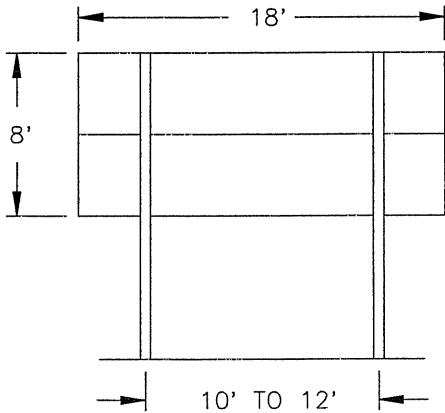

MODELS:
FB-1424, FB-1524,
FB-1624, SO-1424,
SO-1624

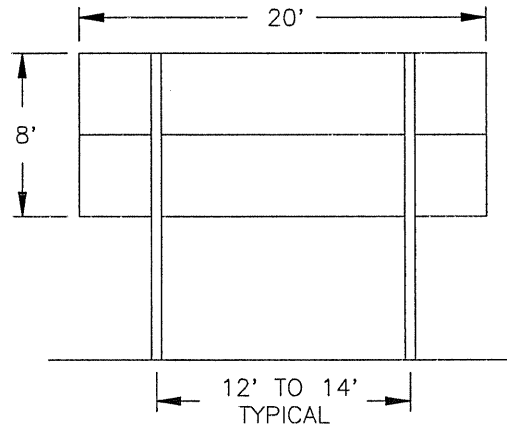

MODELS FB-2002, FB-2003

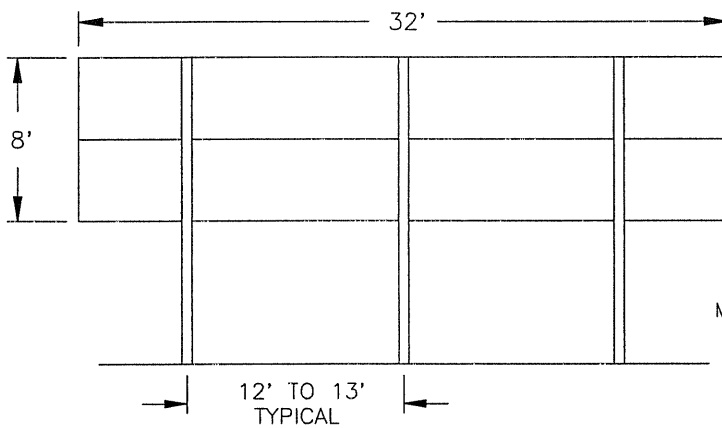

MODELS FB-1630L, FB-1830L

REV.	DATE	DESCRIPTION	BY	APPR.
05	14OCT04	REDUCED 8'X25' AND 8'X32' POLES QUANTITIES	MCOPL	
04	04NOV03	CHANGED POLE SPACING OF 25' SCOREBOARDS	MCOPL	
03	04JAN02	ADDED MODEL FB-2004	MCOPL	
02	17MAR00	ADDED MODELS FB-2002 AND FB-2003	GBREEN	
01	02 SEPT 99	ADDED MODELS SO-1830, SO-1930, SO-2030, AND FB-2001	JNILSE	

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2003 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR SCOREBOARDS

TITLE: BEAM SPACINGS, FOOTBALL/TRACK/SOCCER

DES. BY: AVB

DRAWN BY: A VANBEMMEL

DATE: 27APR95


REVISION

APPR. BY:


05

SCALE: 1=100


1091-R08A-70089

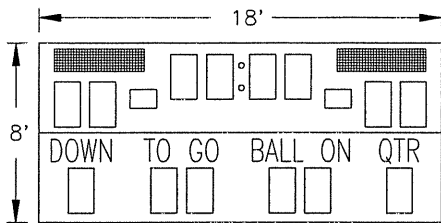


SO-1424 WITH 832-12 TNMC

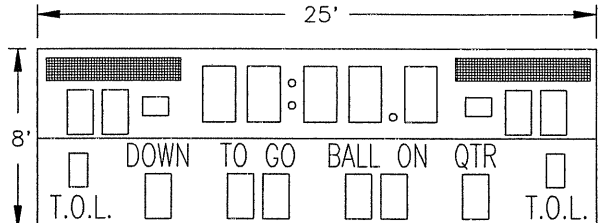


FB-1730 WITH 848-12 TNMC

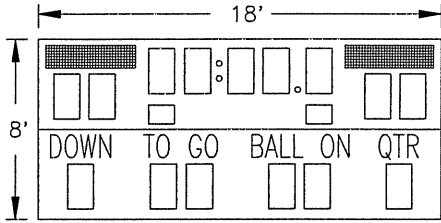


FB-1524 WITH 832-12 TNMC

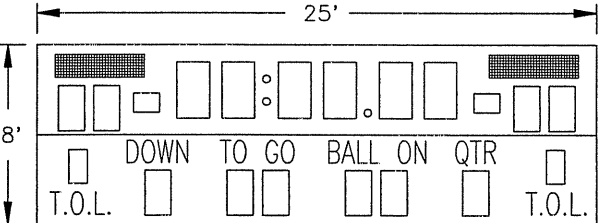


FB-1830 WITH 832-12 TNMC

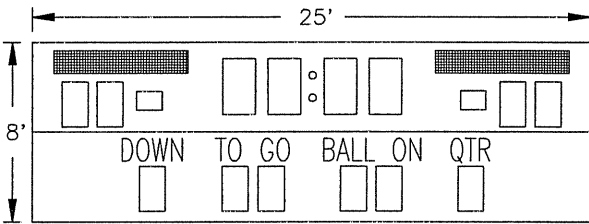


FB-1430 WITH 848-12 TNMC

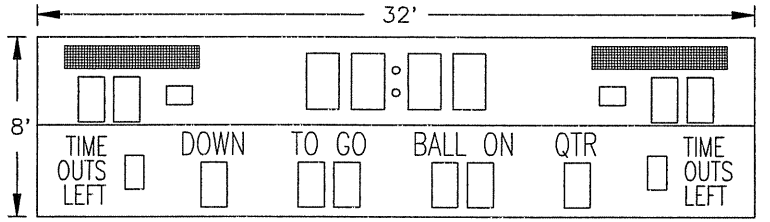


FB-1630L WITH 848-12 TNMC

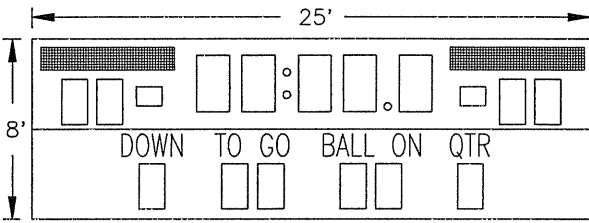


FB-1530 WITH 848-12 TNMC

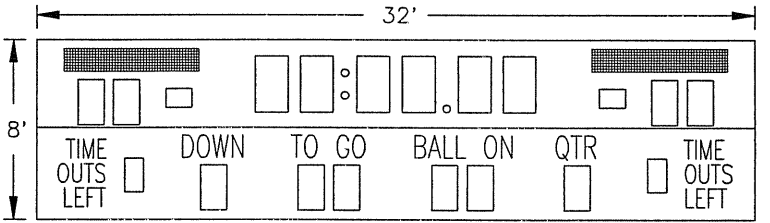

FB-1830L WITH 848-12 TNMC

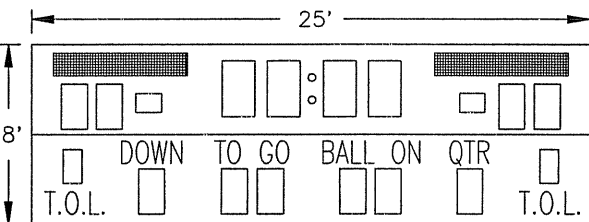

FB-1630 WITH 848-12 TNMC

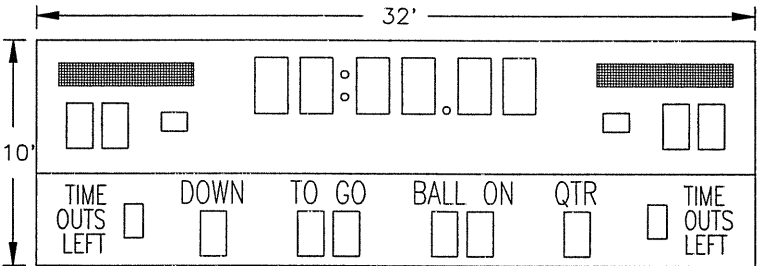

FB-2001 WITH 848-12 TNMC

REV.	DATE	DESCRIPTION	BY	APPR.
08	13AUG02	ADDED MODEL FB-2001 W/ TNMC	MCOP	
7	21FEB00	REMOVED MODELS SO-1624 AND SO-1830 ADDED MODEL FB-1424	BDP	
6	28JUL99	ADDED MODEL SO-1830. AND MODEL FB-1630	MVD	
5	22OCT98	ADDED MODEL FB-1524.	BDP	
4	16SEP98	ADDED MODEL FB-1730.	BDP	
3	18AUG97	ADDED MODEL FB-1830.	REY	

2	05FEB97	ADDED MODEL FB-1830L	BDP	
1	03OCT96	ADDED MODELS SO-1624 AND FB-1430.	AVB	AVB

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR INCANDESCENT SCOREBOARDS

TITLE: MULTIPLE SECTION FOOTBALL SCBD MODELS W/TNMC

DES. BY: JOSBAH

DRAWN BY: BYOUNG


DATE: 18AUG97

REVISION

APPR. BY:

SCALE: 1 = 100


1091-R08A-84233

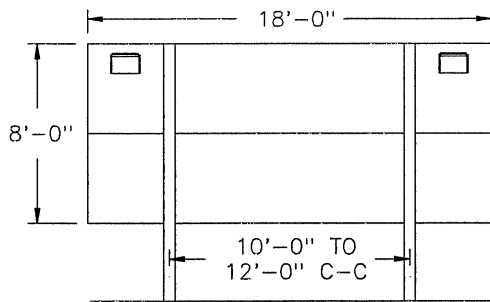

REAR VIEW

MODEL SO-1624 WITH 832-12 TNMC
 MODEL FB-1424 WITH 832-12 TNMC
 MODEL FB-1524 WITH 832-12 TNMC
 MODEL SO-1424 WITH 832-12 TNMC


BEAM SPACING IS CRITICAL TO CLEAR VENTILATION HOODS.

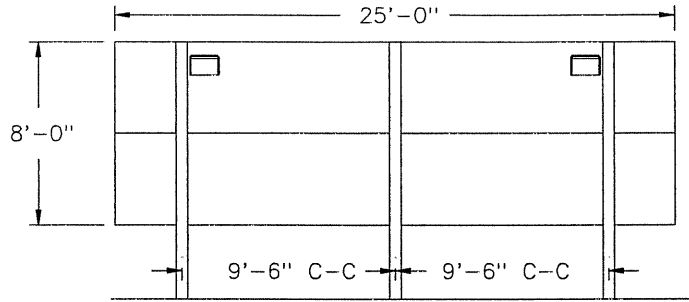

REAR VIEW

MODEL FB-1430 WITH 848-12 TNMC
 MODEL FB-1630 WITH 848-12 TNMC
 MODEL SO-1830 WITH 848-12 TNMC


BEAM SPACING IS CRITICAL TO CLEAR VENTILATION HOODS.

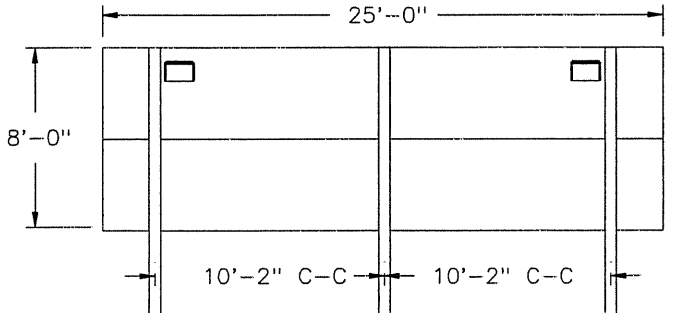

REAR VIEW


MODEL FB-1530 WITH 848-12 TNMC
 MODEL FB-1730 WITH 848-12 TNMC
 MODEL SO-1930 WITH 848-12 TNMC

BEAM SPACING IS CRITICAL TO CLEAR VENTILATION HOODS.

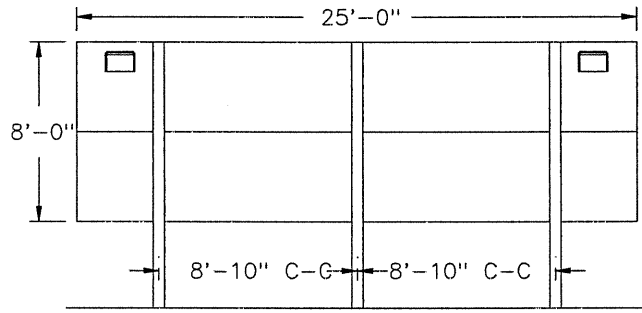

REAR VIEW

MODEL FB-1830 WITH 832-12 TNMC
 BEAM SPACING IS CRITICAL TO CLEAR VENTILATION HOODS.

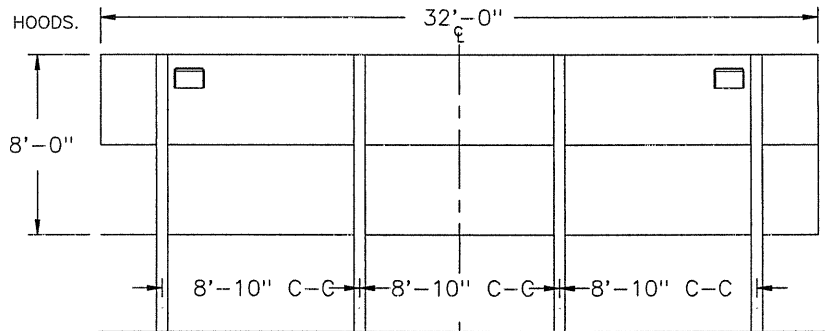

REAR VIEW

MODEL FB-1630L WITH 848-12 TNMC &
 MODEL FB-1830L WITH 848-12 TNMC
 BEAM SPACING IS CRITICAL TO CLEAR VENTILATION HOODS.

REV.	DATE	DESCRIPTION	BY	APPR.
11	24OCT03	CHANGED POLE SPACING ON FB-XX24 AND SO-XX24 MODELS WITH 832-12 TNMC	MCOPL	
10	28MAR00	ADDED FB-1424, SO-1424 WITH 832-12TNMC. ADDED FB-1530, SO-1930 WITH 848-10TNMC.	GBREE	
9	02 SEPT 99	ADDED SO-1630 WITH 848-10TNMC.	JNILSE	
8	26JUL99	ADD SO-1830 W/TNMC	BDP	
7	08DEC98	UPDATED TO SHOP FAN HOODS FOR 1600 SERRIES TNMC FAN HOODS.	BDP	
6	22OCT98	ADDED FB-1730 & FB-1524	BDP	
5	20AUG97	ADDED FB-1830	BDP	

4	14 FEB 97	CORRECTED MODEL NUMBER FB-1430L TO FB-1430.	AVB	AVB
3	05FEB97	ADDED MODEL FB-1830L WITH MODEL FB-1630L	BDP	
2	16 SEPT 96	ADDED MODEL FB-1430L	JEM	
1	16 AUG 96	ADDED REAR VIEW OF SO-1624	BPETER	

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2003 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: FOOTBALL SCOREBOARDS

TITLE: BEAM SPACING; DISPLAYS W/ TNMC

DES. BY: JOSBAH

DRAWN BY: JOSBAH

DATE: 15 JULY 96


REVISION

APPR. BY:


11

SCALE: 1 = 100

1091-R08A-84292

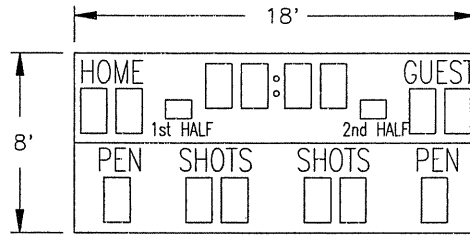


SO-1424

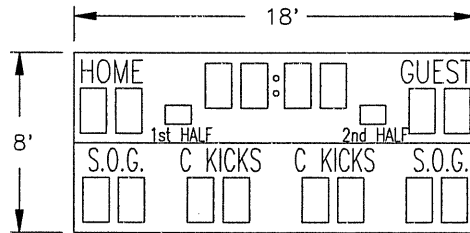


SO-1624

(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

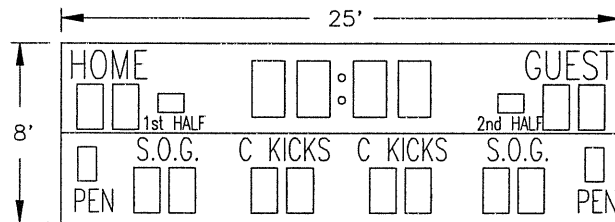


SO-1830

(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

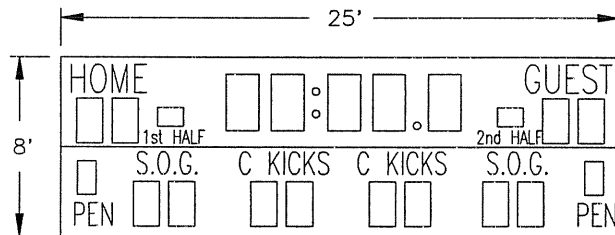

SO-1930

(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

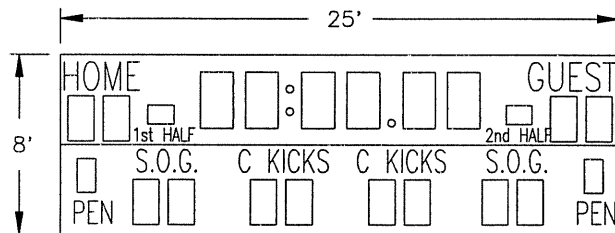

SO-2030

(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR INCANDESCENT SCOREBOARDS

TITLE: MULTIPLE SECTION SOCCER SCBD MODELS

DES. BY: AVB

DRAWN BY: MJORDAN

DATE: 03 NOV 97


REVISION

APPR. BY:


SCALE: 1 = 100

1091-R08A-98161


REV.	DATE	DESCRIPTION	BY	APPR.
2	21FEB00	UPDATED CAPTIONS	BDP	
1	29OCT98	REPOSITIONED 1ST HALF AND 2ND HALF ON MODELS SO-1424, 1830, 1930 & 2030; ADDED SAVES CAPTION OPTION TO SO-1624.	TWEBER	




FB-1424




FB-1524

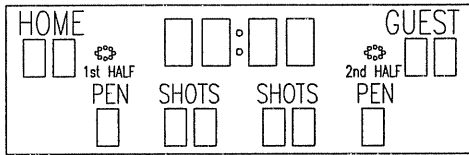


FB-1430




FB-1624

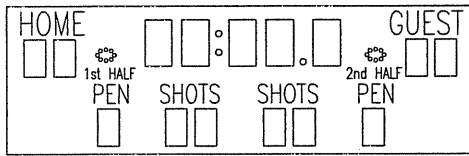


FB-1530

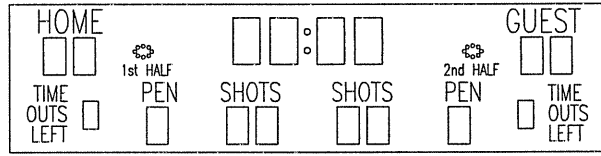


FB-1630L

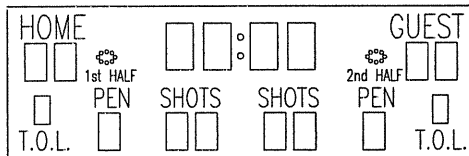


FB-1630 AND FB-2002

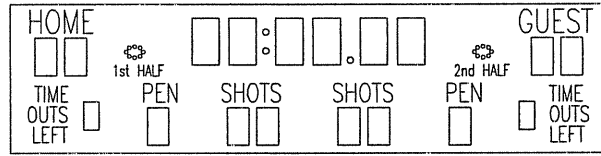


FB-1830L

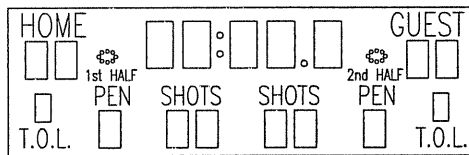

FB-1730 AND FB-2003

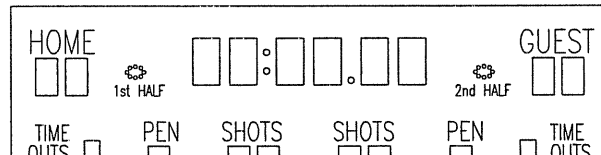


FB-2001

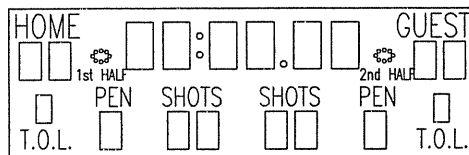

FB-1830

03	26JULY01	ADDED FB-1524 AND FB-1624	MCOPL
02	17MAR00	ADDED FB-2002 & FB-2003	GBREE
01	21FEB00	UPDATED TO CAPTION OPTIONS, SOCCER	BDP
REV.	DATE	DESCRIPTION	BY APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR INCANDESCENT SCOREBOARDS			
TITLE: CAPTION OPTIONS, SOCCER			
DES. BY: BPETERSON		DRAWN BY: BPETERSON	
DATE: 09APR98			
REVISION	APPR. BY:	1091-R08A-101442	
	SCALE: 1 = 120		

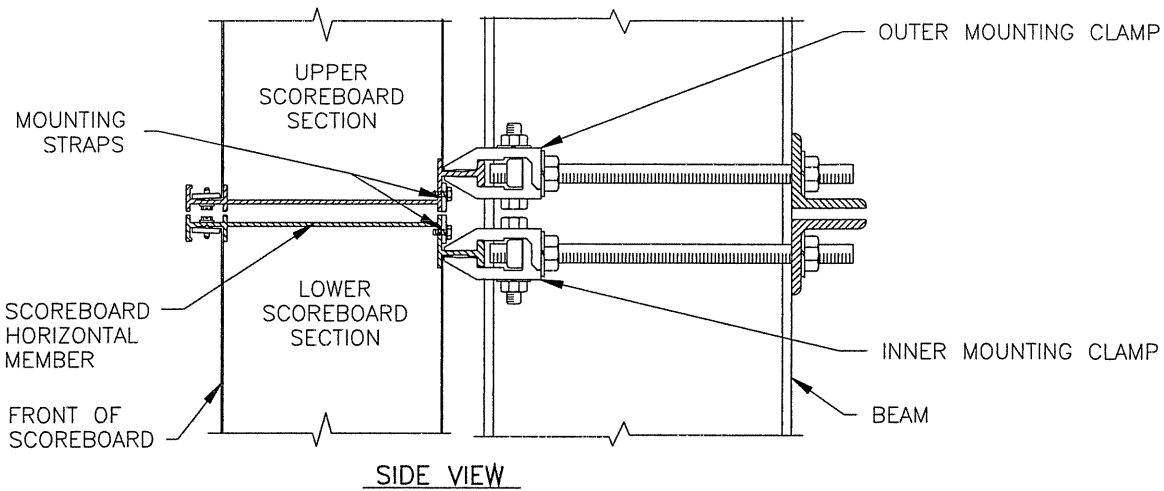

SIDE VIEW

STRAP INSTALLATION PROCEDURE

AFTER CLAMPING ALL FOUR SECTIONS OF THE BA-3718 SCOREBOARD TO MOUNTING BEAMS, IT IS NECESSARY TO ATTACH THE TWO BOTTOM SECTIONS TO EACH OTHER AND THE TWO TOP SECTIONS TO EACH OTHER.


THIS IS ACHIEVED USING FOUR MOUNTING STRAPS (1/8" X 3/4" X 29" LONG) AND #10 HEX HEADED SCREWS.

POSITION THE MOUNTING STRAPS AS SHOWN ON THIS DRAWING AND DRILL 5/32" DIAMETER HOLES IN THE EXTRUSION USING THE HOLES IN THE MOUNTING STRAPS AS GUIDES.


ATTACH SIX SCREWS TO EACH STRAP.

ATTACH ONE STRAP TO THE TOP & BOTTOM OF EACH LEFT & RIGHT SECTION.

FAILURE TO ATTACH THE MOUNTING STRAPS TO THESE DISPLAY SECTIONS VOIDS ALL WARRANTY.

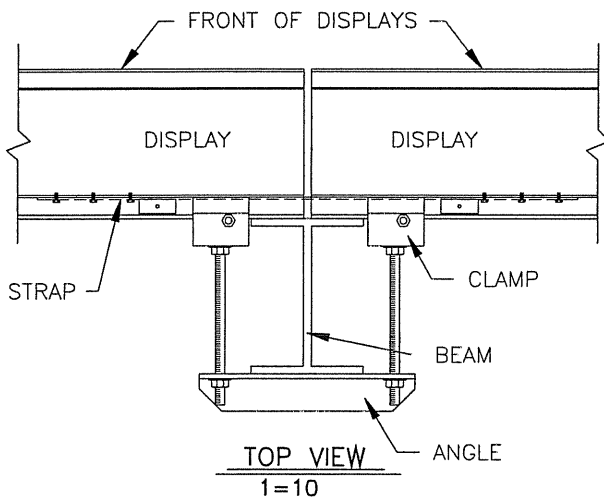

TOP VIEW
1=10

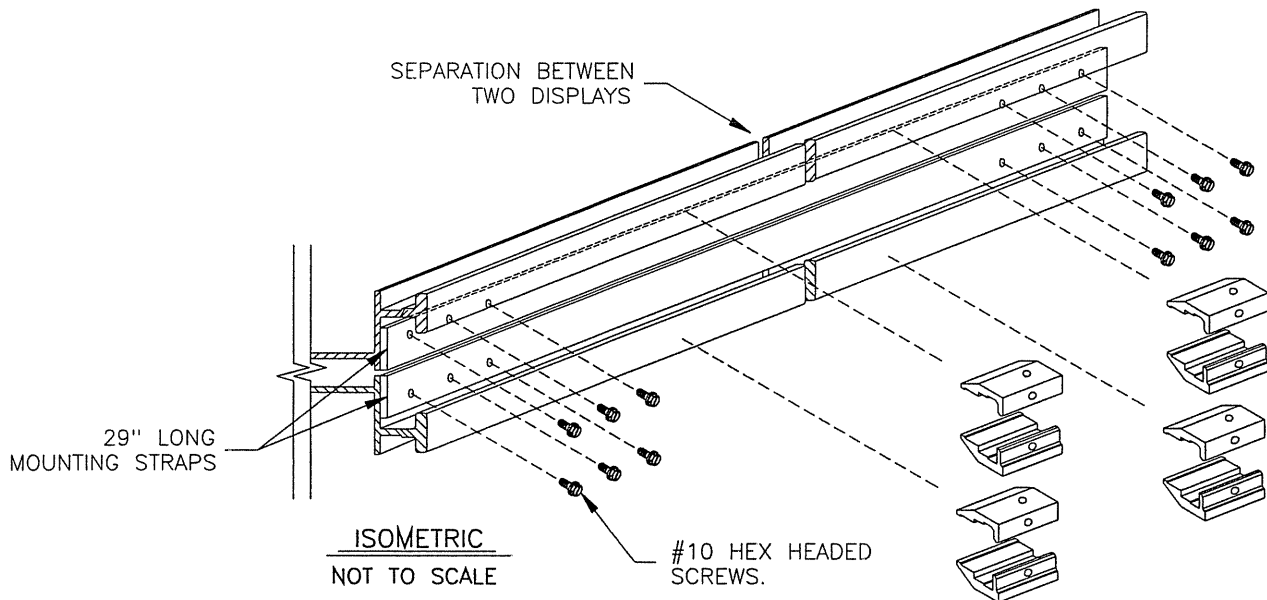

ISOMETRIC
NOT TO SCALE

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR SCOREBOARDS			
TITLE: DISPLAY MOUNTING STRAPS, BA-3718			
DES. BY: TWEBER		DRAWN BY: PLACHER	
		DATE: 09APR99	
REVISION	APPR. BY:	1091-E10A-114415	
	SCALE: 1=5		

REV.	DATE	DESCRIPTION	BY	APPR.

KEY: 0 = WIRE NOT CONNECTED 1 = WIRE IS CONNECTED

DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
1	0	0	0	0	0	0	0	1
2	0	0	0	0	0	0	1	0
3	0	0	0	0	0	0	1	1
4	0	0	0	0	0	1	0	0
5	0	0	0	0	0	1	0	1
6	0	0	0	0	0	1	1	0
7	0	0	0	0	0	1	1	1
8	0	0	0	0	1	0	0	0
9	0	0	0	0	1	0	0	1
10	0	0	0	0	1	0	1	0
11	0	0	0	0	1	0	1	1
12	0	0	0	0	1	1	0	0
13	0	0	0	0	1	1	0	1
14	0	0	0	0	1	1	1	0
15	0	0	0	0	1	1	1	1
16	0	0	0	1	0	0	0	0

DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
33	0	0	1	0	0	0	0	1
34	0	0	1	0	0	0	1	0
35	0	0	1	0	0	0	1	1
36	0	0	1	0	0	1	0	0
37	0	0	1	0	0	1	0	1
38	0	0	1	0	0	1	1	0
39	0	0	1	0	0	1	1	1
40	0	0	1	0	1	0	0	0
41	0	0	1	0	1	0	0	1
42	0	0	1	0	1	0	1	0
43	0	0	1	0	1	0	1	1
44	0	0	1	0	1	1	0	0
45	0	0	1	0	1	1	0	1
46	0	0	1	0	1	1	1	0
47	0	0	1	0	1	1	1	1
48	0	0	1	1	0	0	0	0

DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
65	0	1	0	0	0	0	0	1
66	0	1	0	0	0	0	1	0
67	0	1	0	0	0	0	1	1
68	0	1	0	0	0	1	0	0
69	0	1	0	0	0	1	0	1
70	0	1	0	0	0	1	1	0
71	0	1	0	0	0	1	1	1
72	0	1	0	0	1	0	0	0
73	0	1	0	0	1	0	0	1
74	0	1	0	0	1	0	1	0
75	0	1	0	0	1	0	1	1
76	0	1	0	0	1	1	0	0
77	0	1	0	0	1	1	0	1
78	0	1	0	0	1	1	1	0
79	0	1	0	0	1	1	1	1
80	0	1	0	1	0	0	0	0


DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
97	0	1	1	0	0	0	0	1
98	0	1	1	0	0	0	0	1
99	0	1	1	0	0	0	0	1
100	0	1	1	0	0	1	0	0
101	0	1	1	0	0	1	0	1
102	0	1	1	0	0	1	1	0
103	0	1	1	0	0	1	1	1
104	0	1	1	0	1	0	0	0
105	0	1	1	0	1	0	0	1
106	0	1	1	0	1	0	1	0
107	0	1	1	0	1	0	1	1
108	0	1	1	0	1	1	0	0
109	0	1	1	0	1	1	0	1
110	0	1	1	0	1	1	1	0
111	0	1	1	0	1	1	1	1
112	0	1	1	1	0	0	0	0

DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
17	0	0	0	1	0	0	0	1
18	0	0	0	1	0	0	1	0
19	0	0	0	1	0	0	1	1
20	0	0	0	1	0	1	0	0
21	0	0	0	1	0	1	0	1
22	0	0	0	1	0	1	1	0
23	0	0	0	1	0	1	1	1
24	0	0	0	1	1	0	0	0
25	0	0	0	1	1	0	0	1
26	0	0	0	1	1	0	1	0
27	0	0	0	1	1	0	1	1
28	0	0	0	1	1	1	0	0
29	0	0	0	1	1	1	0	1
30	0	0	0	1	1	1	1	0
31	0	0	0	1	1	1	1	1
32	0	0	1	0	0	0	0	0

DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
49	0	0	1	1	0	0	0	1
50	0	0	1	1	0	0	1	0
51	0	0	1	1	0	0	1	1
52	0	0	1	1	0	1	0	0
53	0	0	1	1	0	1	0	1
54	0	0	1	1	0	1	1	0
55	0	0	1	1	0	1	1	1
56	0	0	1	1	1	0	0	0
57	0	0	1	1	1	0	0	1
58	0	0	1	1	1	0	1	0
59	0	0	1	1	1	0	1	1
60	0	0	1	1	1	1	0	0
61	0	0	1	1	1	1	0	1
62	0	0	1	1	1	1	1	0
63	0	0	1	1	1	1	1	1
64	0	1	0	0	0	0	0	0


DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
81	0	1	0	1	0	0	0	1
82	0	1	0	1	0	0	1	0
83	0	1	0	1	0	0	1	1
84	0	1	0	1	0	1	0	0
85	0	1	0	1	0	1	0	1
86	0	1	0	1	0	1	1	0
87	0	1	0	1	0	1	1	1
88	0	1	0	1	1	0	0	0
89	0	1	0	1	1	0	0	1
90	0	1	0	1	1	0	1	0
91	0	1	0	1	1	0	1	1
92	0	1	0	1	1	1	0	0
93	0	1	0	1	1	1	0	1
94	0	1	0	1	1	1	1	0
95	0	1	0	1	1	1	1	1
96	0	1	1	0	0	0	0	0

DECIMAL ADDRESS	PIN 12	PIN 11	PIN 9	PIN 8	PIN 6	PIN 5	PIN 3	PIN 2
113	0	1	1	1	0	0	0	1
114	0	1	1	1	0	0	1	0
115	0	1	1	1	0	0	1	1
116	0	1	1	1	0	1	0	0
117	0	1	1	1	0	1	0	1
118	0	1	1	1	0	1	1	0
119	0	1	1	1	0	1	1	1
120	0	1	1	1	1	0	0	0
121	0	1	1	1	1	0	0	1
122	0	1	1	1	1	0	1	0
123	0	1	1	1	1	0	1	1
124	0	1	1	1	1	1	0	0
125	0	1	1	1	1	1	0	1
126	0	1	1	1	1	1	1	0
127	0	1	1	1	1	1	1	1
128	1	0	0	0	0	0	0	0



ADDRESS PLUG
WIRE SIDE

WIRING DIAGRAM
ADDRESS PLUG
WITH ALL WIRES
CONNECTED

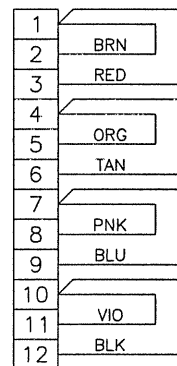


DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ:	
TITLE: ADDRESS TABLE, 1 THROUGH 128	
DES. BY: AVB	DRAWN BY: A VANBEMMEL DATE: 28 APR 99
REVISION	APPR. BY:
	SCALE: NONE

1150-R04A-115078

REV.	DATE	DESCRIPTION	BY	APPR.
------	------	-------------	----	-------

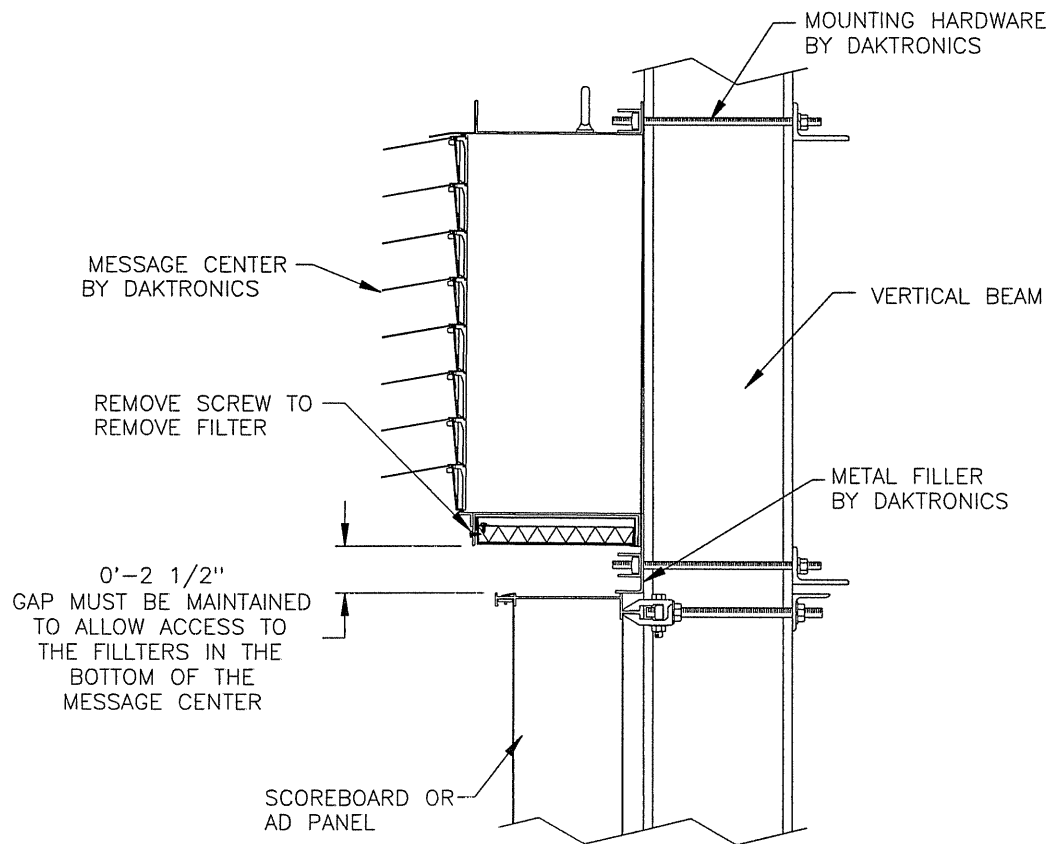

SIDE VIEW

AN 1/8" THICK METAL FILLER HAS BEEN ATTACHED BELOW THE 2 1/2" MESSAGE CENTER TO MAINTAIN A 2 1/2" GAP ABOVE ANY SCOREBOARD OR AD PANEL THAT IT MAY BE MOUNTED ABOVE. IF THE GAP IS NOT MAINTAINED, THE FILTER WILL NOT BE ACCESSIBLE.

IF THE BOLT HEADS WHICH ATTACH THE METAL FILLER TO THE BOTTOM OF THE MESSAGE CENTER INTERFERE WITH THE MOUNTING OF THE MESSAGE CENTER, NEW 9/16" HOLES MAY BE DRILLED AND THE BOLTS MOVED SOMEWHERE ELSE ALONG THE METAL FILLER.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR SCOREBOARD

TITLE: MOUNTING DETAIL; 2 1/2" MATRIX

DES. BY: BPETERSON

DRAWN BY: MVANDYK

DATE: 28JUL99


REVISION

APPR. BY:

SCALE: 1=10

1157-E10A-115882

REV.	DATE	DESCRIPTION	BY	APPR.

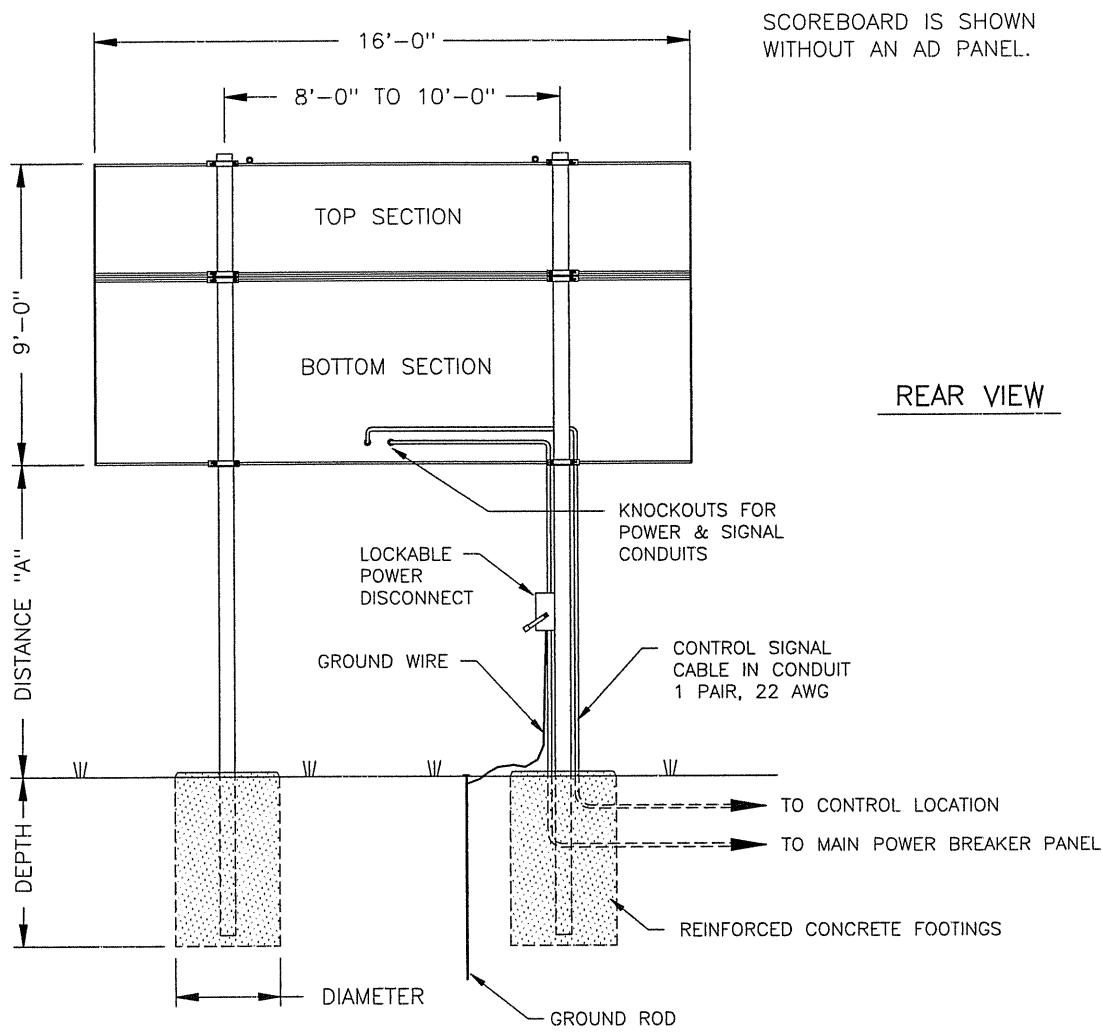

MODEL BA-1524 WITHOUT AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	16'-0" x 9'-0"	BEAM FOOTING	W8x28 4.0' x 5.1'	W8x31 4.0' x 5.6'	W10x39 4.0' x 6.7'
12'-0"	16'-0" x 9'-0"	BEAM FOOTING	W8x31 4.0' x 5.4'	W8x35 4.0' x 5.9'	W12x45 4.0' x 6.9'
14'-0"	16'-0" x 9'-0"	BEAM FOOTING	W8x35 4.0' x 5.6'	W10x39 4.0' x 6.2'	W8x48 4.0' x 7.3'

MODEL BA-1524 WITH 30"-HIGH AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	16'-0" x 11'-6"	BEAM FOOTING	W8x35 4.0' x 5.7'	W10x39 4.0' x 6.3'	W8x48 4.0' x 7.4'
12'-0"	16'-0" x 11'-6"	BEAM FOOTING	W10x39 4.0' x 6.0'	W12x45 4.0' x 6.6'	W12x53 4.0' x 7.7'
14'-0"	16'-0" x 11'-6"	BEAM FOOTING	W12x45 4.0' x 6.2'	W8x48 4.0' x 6.9'	W10x60 4.0' x 8.1'

FOOTING = DIAMETER X DEPTH

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL BEARING PRESSURE OF 2000 LB/FT²

ACTUAL FOOTING DEPTH AND DIAMETER FOR A PARTICULAR INSTALLATION MUST BE DETERMINED BY A QUALIFIED STRUCTURAL ENGINEER, USING DATA FROM A SOIL SAMPLE TEST AT THE SITE.

DAKTRONICS, INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.

DAKTRONICS, INC. BROOKINGS, SD 57006

REV.	DATE	DESCRIPTION	BY	APPR.
2	15AUG01	CORRECTED VERTICAL DIMENSION OF SCBD FROM 8'-0" TO 9'-0".	KJB	
1	20DEC00	REVISED COLUMN SECTIONS & FOOTINGS	MVD	

PROJ: OUTDOOR SCOREBOARDS			
TITLE: INSTALLATION SPECIFICATIONS, BA-1524			
DES. BY: TWEBER	DRAWN BY: JNILSEN	DATE: 26 AUG 99	
REVISION	APPR. BY:	1091-R10A-120972	
	SCALE: 1=60		

	16'			
8'	BALL	STRIKE	OUT	INNING
	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	DAKTRONICS	RUNS	HITS	ERR
	GUEST	○ <input type="text"/> <input type="text"/>	○ <input type="text"/> <input type="text"/>	○ <input type="text"/>
	HOME	○ <input type="text"/> <input type="text"/>	○ <input type="text"/> <input type="text"/>	○ <input type="text"/>

BA-1518

	16'			
9'	BALL	STRIKE	OUT	INNING
	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	DAKTRONICS	RUNS	HITS	ERR
	GUEST	○ <input type="text"/> <input type="text"/>	○ <input type="text"/> <input type="text"/>	○ <input type="text"/>
	HOME	○ <input type="text"/> <input type="text"/>	○ <input type="text"/> <input type="text"/>	○ <input type="text"/>

BA-1524

	28'													
7'	AT BAT	BALL			STRIKE			OUT		H/E				
	<input type="text"/> <input type="text"/>	<input type="text"/>			<input type="text"/>			<input type="text"/>		<input type="text"/> <input type="text"/>				
	DAKTRONICS		1	2	3	4	5	6	7	8	9	10	RUNS	HITS
	GUEST	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>
	HOME	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>


BA-3718

	36'													
9'-4"	AT BAT	BALL			STRIKE			OUT		H/E				
	<input type="text"/> <input type="text"/>	<input type="text"/>			<input type="text"/>			<input type="text"/>		<input type="text"/> <input type="text"/>				
	DAKTRONICS		1	2	3	4	5	6	7	8	9	10	RUNS	HITS
	GUEST	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>
	HOME	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>	○ <input type="text"/>


BA-3724

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OUTDOOR INCANDESCENT SCOREBOARDS	
TITLE: MULTIPLE SECTION BASEBALL SCOREBOARD MODELS	
DES. BY: BPETERSON	DATE: 09DEC99
REVISION	APPR. BY:
	SCALE: 1=50
1091-E10A-126086	


REV.	DATE	DESCRIPTION	BY	APPR.
------	------	-------------	----	-------

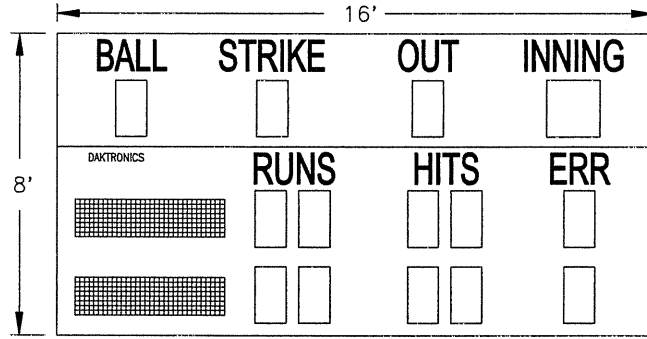

BA-1518 WITH 832-12 TNMC

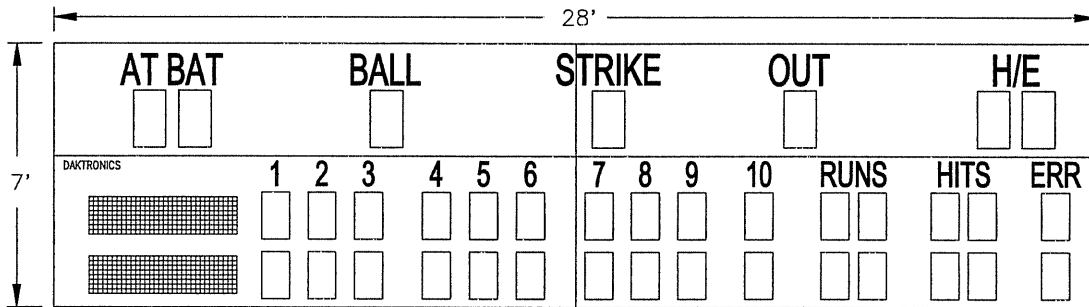


BA-3718 WITH 832-12 TNMC

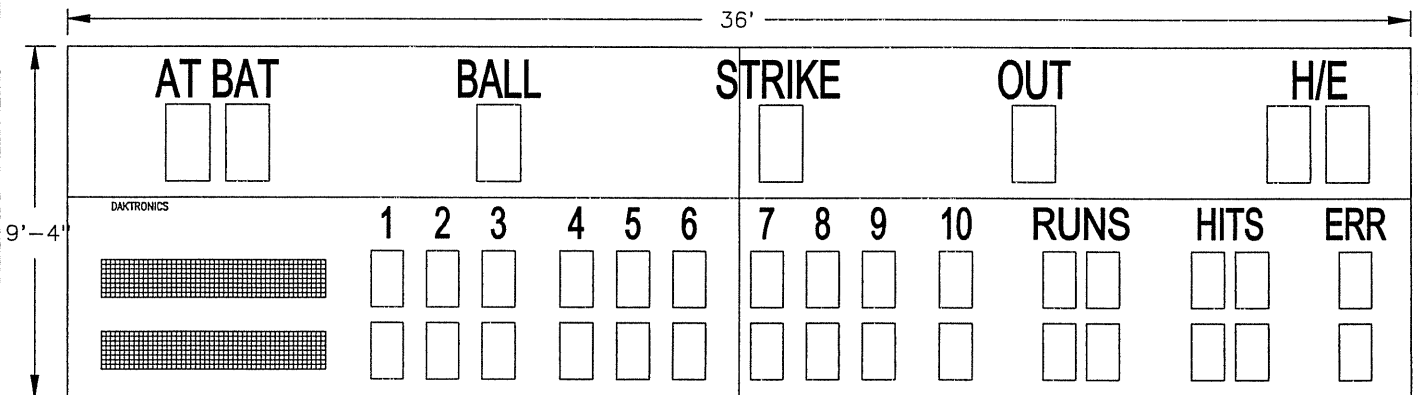

BA-3724 WITH 848-12 TNMC

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR INCANDESCENT SCOREBOARDS			
TITLE: MULTIPLE SECTION BASEBALL SCBD MODELS W/TNMC			
DES. BY: BPETERSON		DRAWN BY: BPETERSON	
		DATE: 09DEC99	
REVISION	APPR. BY:	1091-E10A-126362	
	SCALE: 1=50		

REV.	DATE	DESCRIPTION	BY	APPR.
------	------	-------------	----	-------

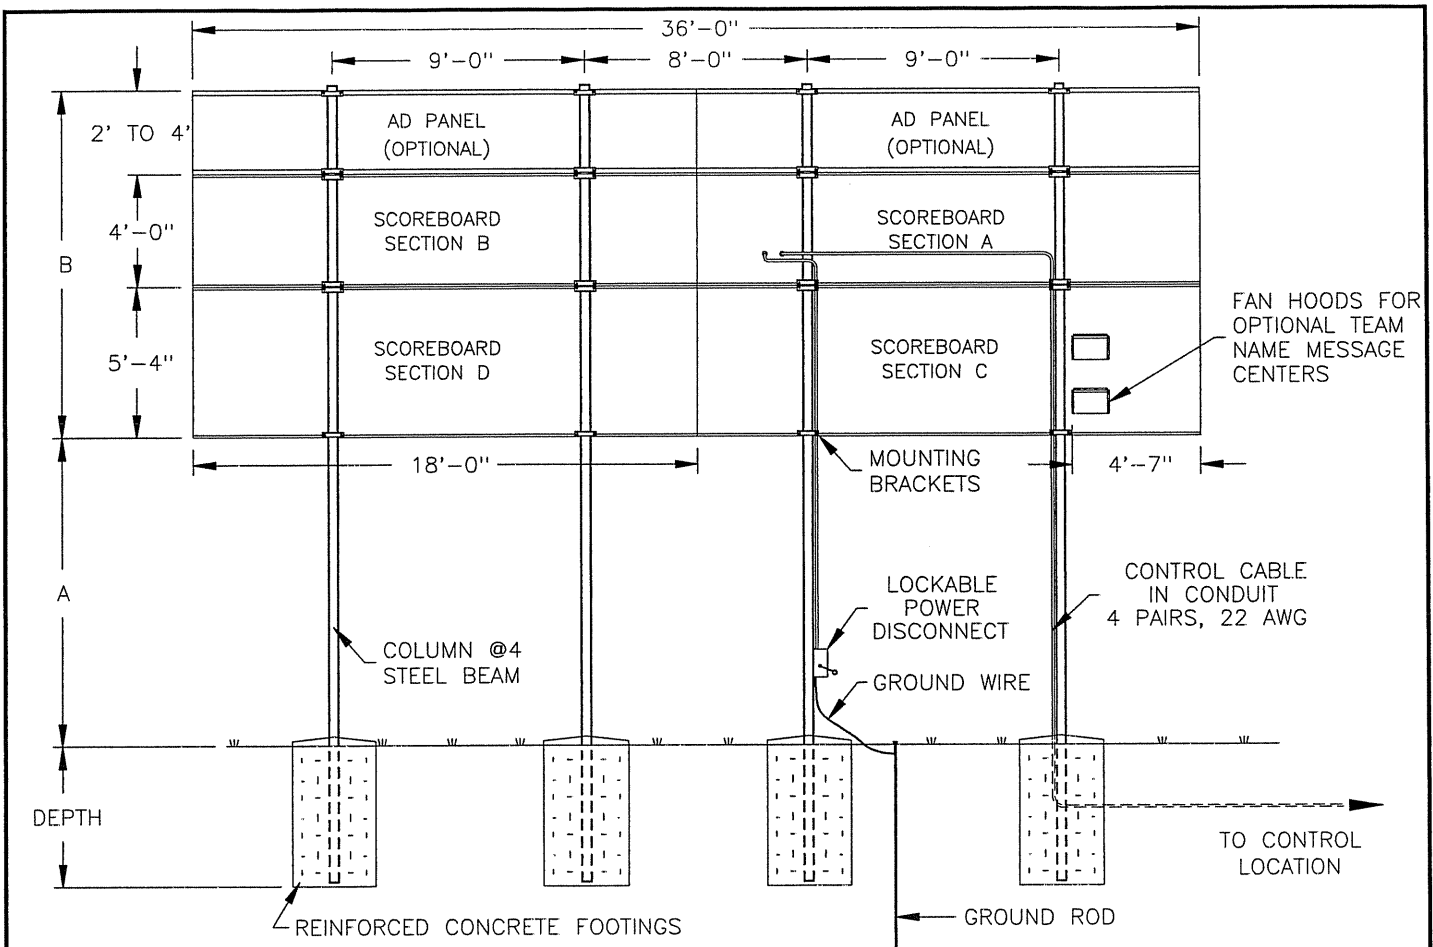

REAR VIEW

BA-3724

ELECTRICAL

POWER CABLE MUST HAVE A SEPERATE GROUND CONDUCTOR. SCOREBOARD MUST BE CONNECTED TO A GROUND ROD AT SCOREBOARD LOCATION.

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS, AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENCED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.

A NOTE ABOUT BEAM NOMENCLATURE:

For a typical beam, W12x30 for example, "W" stands for "Wide-Flange Beam". The first number (12) is the approximate front to rear dimension of the beam in inches. The second number (30) is the weight per foot in pounds. This numbering is standard in the steel industry. Widths vary from 5 to 10 inches in this chart.

MODEL BA-3724						
VERTICAL DISTANCE (A)	AD PANEL HEIGHT	COMBINED HEIGHT (B)		DESIGN WIND VELOCITY		
				70 MPH	80 MPH	100 MPH
10 FT	NONE	9'-4"	BEAM	W8x31	W10x33	W8x40
			FOOTING	3.5'x5.6'	3.5'x6.2'	3.5'x7.3'
	2 FT	11'-4"	BEAM	W8x35	W10x39	W8x48
			FOOTING	3.5'x6.1'	3.5'x6.7'	3.5'x8.0'
4 FT	13'-4"	BEAM	W8x40	W8x48	W12x58	
		FOOTING	3.5'x6.6'	3.5'x7.3'	3.5'x8.6'	
14 FT	NONE	9'-4"	BEAM	W10x39	W12x45	W10x49
			FOOTING	3.5'x6.1'	3.5'x6.7'	3.5'x7.9'
	2 FT	11'-4"	BEAM	W12x45	W8x48	W10x60
			FOOTING	3.5'x6.6'	3.5'x7.3'	3.5'x8.6'
4 FT	13'-4"	BEAM	W10x49	W12x58	W10x68	
		FOOTING	3.5'x7.1'	3.5'x7.8'	3.5'x9.2'	
18 FT	NONE	9'-4"	BEAM	W10x49	W10x54	W10x68
			FOOTING	3.5'x7.1'	3.5'x7.8'	3.5'x9.2'
	2 FT	11'-4"	BEAM	W12x58	W12x65	W12x79
			FOOTING	3.5'x7.6'	3.5'x8.4'	3.5'x9.9'
4 FT	13'-4"	BEAM	W12x65	W12x72	W14x90	
		FOOTING	3.5'x8.1'	3.5'x8.9'	3.5'x10.5'	

FOOTING = DIAMETER X DEPTH

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR INCANDESCENT SCOREBOARDS

TITLE: INSTALLATION SPECIFICATIONS, BA-3724

DES. BY: BPETERSON

DRAWN BY: MVANDYK

DATE: 12JAN00


REVISION

APPR. BY:

SCALE: 1=80

1091-R10A-126445

REV.	DATE	DESCRIPTION	BY	APPR.
1	12DEC00	REVISED BEAM SECTIONS & FOOTINGS.	MVD	

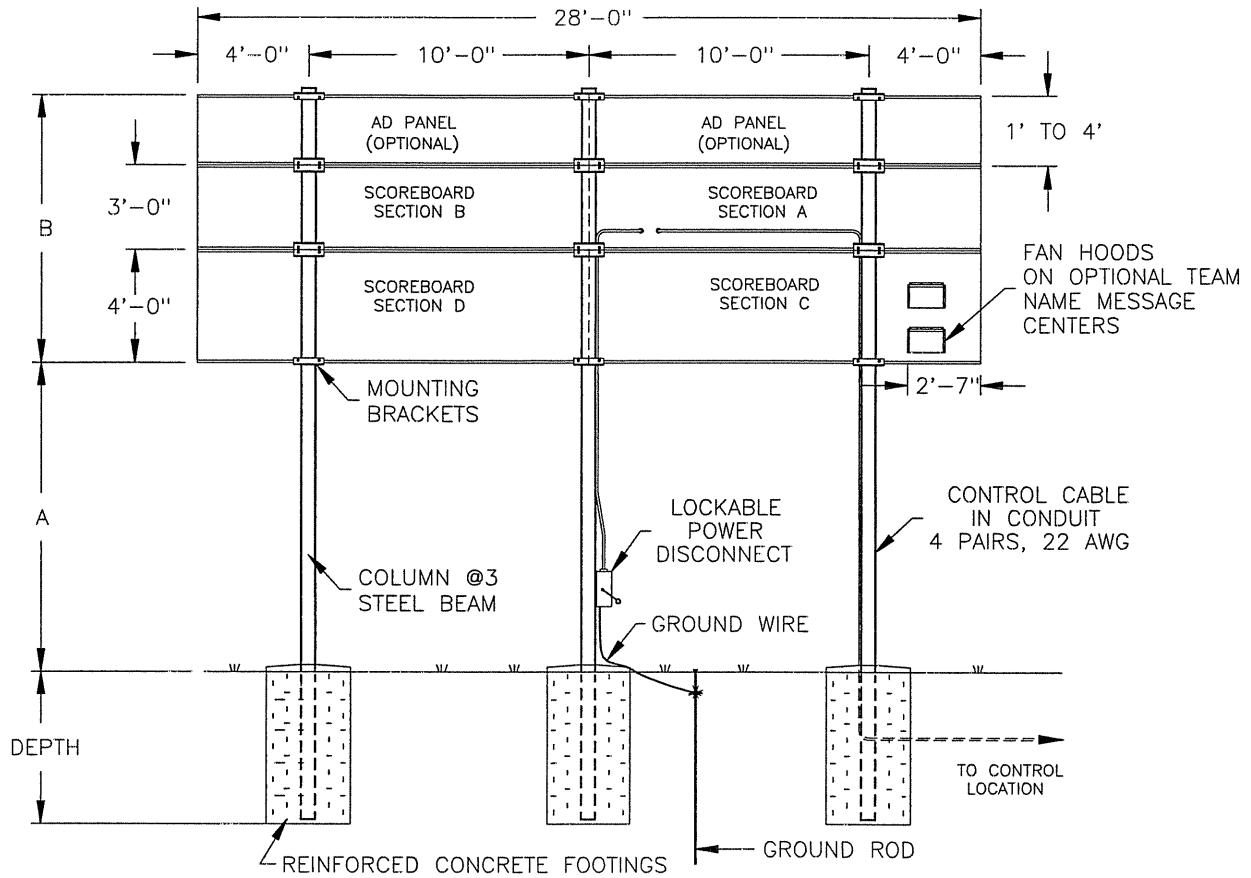

REAR VIEW
BA-3718

ELECTRICAL

POWER CABLE MUST HAVE A SEPERATE GROUND CONDUCTOR. SCOREBOARD MUST BE CONNECTED TO A GROUND ROD AT SCOREBOARD LOCATION.

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS, AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENCED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.

MODEL BA-3718						
VERTICAL DISTANCE (A)	AD PANEL HEIGHT	COMBINED HEIGHT (B)		DESIGN WIND VELOCITY		
				70 MPH	80 MPH	100 MPH
10 FT	NONE	7 FT	BEAM	W8x24	W8x28	W8x35
			FOOTING	3'x6.6'	3'x6.1'	3'x7.2'
	2 FT	9 FT	BEAM	W8x31	W8x35	W12x45
			FOOTING	3'x6.2'	3'x6.8'	3'x8.0'
4 FT	11 FT	BEAM	W8x35	W8x40	W10x49	
		FOOTING	3'x6.8'	3'x7.5'	3'x8.8'	
14 FT	NONE	7 FT	BEAM	W8x31	W8x35	W10x45
			FOOTING	3'x6.1'	3'x6.7'	3'x7.9'
	2 FT	9 FT	BEAM	W10x39	W12x45	W12x53
			FOOTING	3'x6.7'	3'x7.4'	3'x8.8'
4 FT	11 FT	BEAM	W10x45	W10x49	W12x65	
		FOOTING	3'x7.3'	3'x8.0'	3'x9.5'	
18 FT	NONE	7 FT	BEAM	W10x39	W10x45	W10x54
			FOOTING	3'x6.5'	3'x7.2'	3'x8.4'
	2 FT	9 FT	BEAM	W8x48	W12x53	W12x65
			FOOTING	3'x7.2'	3'x8.0'	3'x9.4'
	4 FT	11 FT	BEAM	W10x54	W10x60	W10x77
			FOOTING	3'x7.8'	3'x8.6'	3'x10.1'


FOOTING = DIAMETER X DEPTH

A NOTE ABOUT BEAM NOMENCLATURE:

For a typical beam, W12x30 for example, "W" stands for "Wide-Flange Beam". The first number (12) is the approximate front to rear dimension of the beam in inches. The second number (30) is the weight per foot in pounds. This numbering is standard in the steel industry. Widths vary from 4 to 8 inches in this chart.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR INCANDESCENT SCOREBOARDS			
TITLE: INSTALLATION SPECIFICATIONS, BA-3718			
DES. BY: BPETERSON	DRAWN BY: MVANDYK	DATE: 12JAN00	
REVISION	APPR. BY:	1091-R10A-126455	
	SCALE: 1=80		

REV	DATE	DESCRIPTION	BY	APPR.
1	17JUL00	REVISED BEAM SECTIONS & FOOTINGS.	MVD	

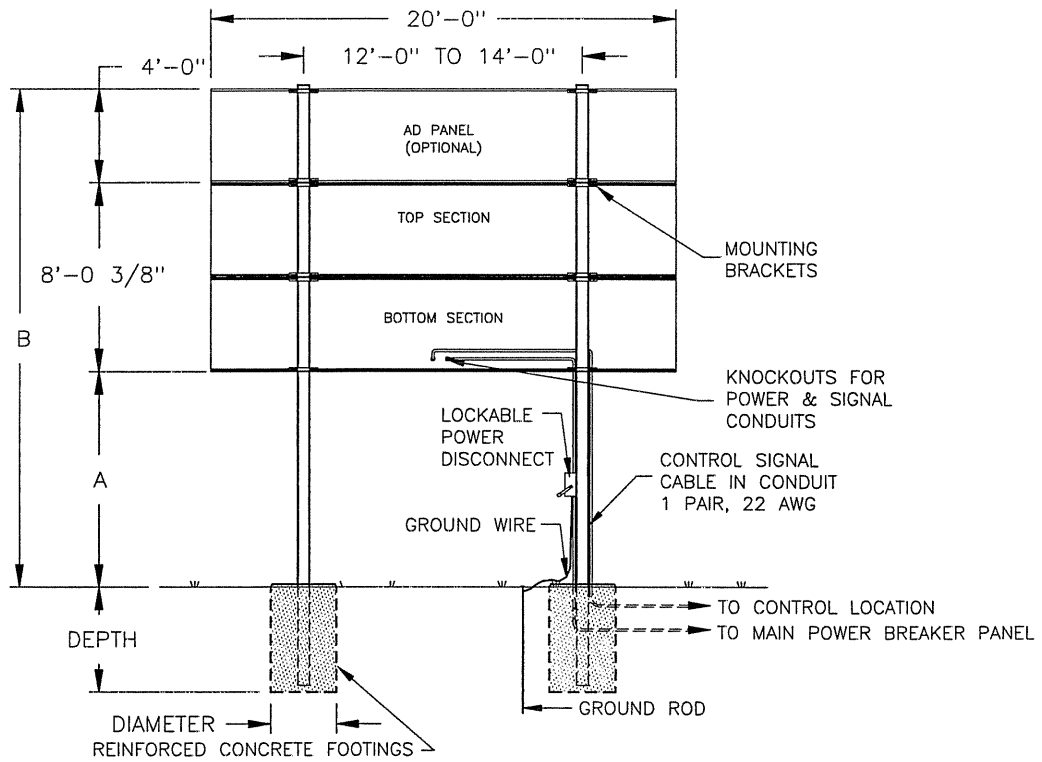

REAR VIEW

FB-2002 & FB-2003

ELECTRICAL

POWER CABLE MUST HAVE A SEPERATE GROUND CONDUCTOR. SCOREBOARD MUST BE CONNECTED TO A GROUND ROD AT SCOREBOARD LOCATION.

FB-2002 & FB-2003							
VERTICAL DISTANCE (A)	AD PANEL HEIGHT	COMBINED HEIGHT (B)		DESIGN WIND VELOCITY			
				70 MPH	80 MPH	90 MPH	100 MPH
10 FT	NONE	18'-0"	BEAM	W8x28	W8x31	W8x35	W10x39
			FOOTING	3.0'x5.8'	3.0'x6.4'	3.0'x7.0	3.0'x7.6'
	4 FT	22'-0"	BEAM	W10x39	W10x45	W10x49	W10x54
			FOOTING	3.0'x7.0'	3.0'x7.8'	3.0'x8.5'	3.0'x9.2'
12 FT	NONE	20'-0"	BEAM	W8x31	W8x35	W10x39	W12x45
			FOOTING	3.0'x6.1'	3.0'x6.7'	3.0'x7.7'	3.0'x7.9'
	4 FT	24'-0"	BEAM	W10x45	W10x49	10x54	W10x60
			FOOTING	3.0'x7.3'	3.0'x8.1'	3.0'x8.8'	3.0'x9.5'
14 FT	NONE	22'-0"	BEAM	W8x35	W8x40	W10x45	W8x48
			FOOTING	3.0'x6.4	3.0'x7.0'	3.0'x7.7'	3.0'x8.3'
	4 FT	26'-0"	BEAM	W8x48	W10x54	W10x60	W10x68
			FOOTING	3.0'x7.6'	3.0'x8.4'	3.0'x9.2'	3.0'x9.9'
16 FT	NONE	24'-0"	BEAM	W10x39	W10x45	W10x49	W10x54
			FOOTING	3.0'x6.7'	3.0'x7.3'	3.0'x8.0'	3.0'x8.6'
	4 FT	28'-0"	BEAM	W12x53	W10x60	W12x65	W10x77
			FOOTING	3.0'x7.9'	3.0'x8.7'	3.0'x9.5'	3.0'x10.2'
18FT	NONE	26'-0"	BEAM	W12x45	W8x48	W10x54	W10x60
			FOOTING	3.0'x6.9'	3.0'x7.6'	3.0'x8.2'	3.0'x8.9'
	4 FT	30'-0"	BEAM	W12x58	W12x65	W12x72	W12x87
			FOOTING	3.0'x8.1'	3.0'x8.9'	3.0'x9.7'	3.0'x10.5'
20 FT	NONE	28'-0"	BEAM	W8x48	W12x53	W10x60	W12x65
			FOOTING	3.0'x7.1'	3.0'x7.8'	3.0'x8.5'	3.0'x9.2'
	4 FT	32'-0"	BEAM	W12x65	W12x72	W12x79	W14x90
			FOOTING	3.0'x8.4'	3.0'x9.2'	3.0'x10.1'	3.0'x10.9'

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS, AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENCED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.


A NOTE ABOUT BEAM NOMENCLATURE:

For a typical beam, W12x30 for example, "W" stands for "Wide-Flange Beam". The first number (12) is the approximate front to rear dimension of the beam in inches. The second number (30) is the weight per foot in pounds. This numbering is standard in the steel industry. Widths vary from 8 to 14 inches in this chart.


FOOTING = DIAMETER X DEPTH

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR INCANDESCENT SCOREBOARDS			
TITLE: INSTALLATION SPECIFICATIONS, FB-2002 & FB-2003			
DES. BY: MVANDYK		DRAWN BY: MVANDYK	
		DATE: 15JAN01	
REVISION	APPR. BY:	1091-E10A-128044	
	SCALE: 1/8"=1'		


01	06AUG01	REMOVED CONDUIT TO TOP SECTION	MCOPL	
REV.	DATE	DESCRIPTION	BY	APPR.

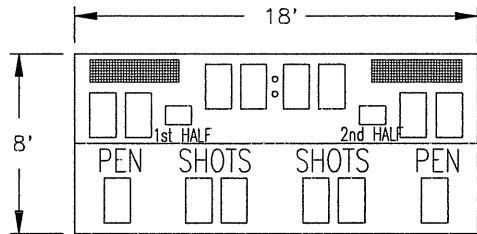


MODEL SO-1424 WITH 832-12 TNMC

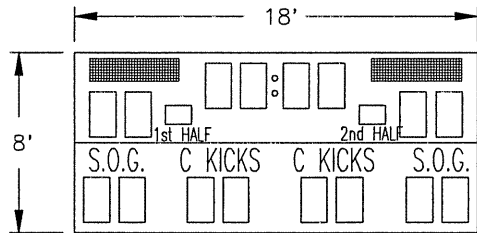


SO-1624 WITH 832-12 TNMC
(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

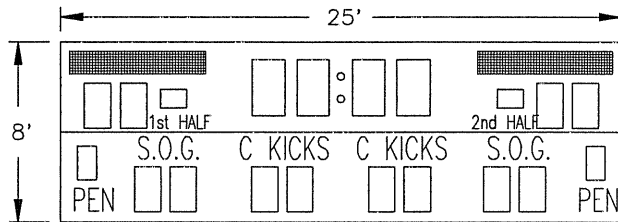

SO-1830 WITH 848-12 TNMC
(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

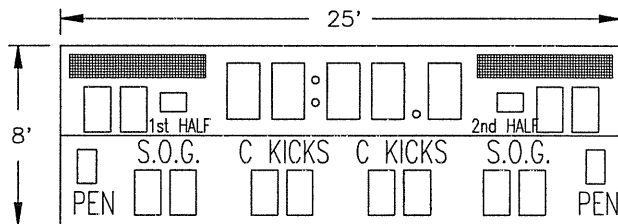

SO-1930 WITH 848-12 TNMC
(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

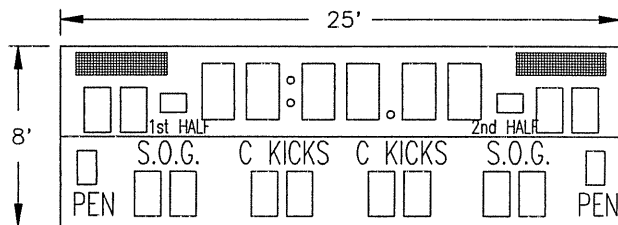

SO-2030 WITH 832-12 TNMC
(OPTIONAL SAVES CAPTION CAN REPLACE C KICKS)

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR INCANDESCENT SCOREBOARDS

TITLE: MULTIPLE SECTION SOCCER SCBD MODELS W/TNMC

DES. BY: BPETERSON

DRAWN BY: BPETERSON

DATE: 21FEB00


REVISION

APPR. BY:


SCALE: 1 = 100

1091-E10A-128172


01	13MAR03	ADDED MODEL SO-2030	MCOPL	
REV.	DATE	DESCRIPTION	BY	APPR.

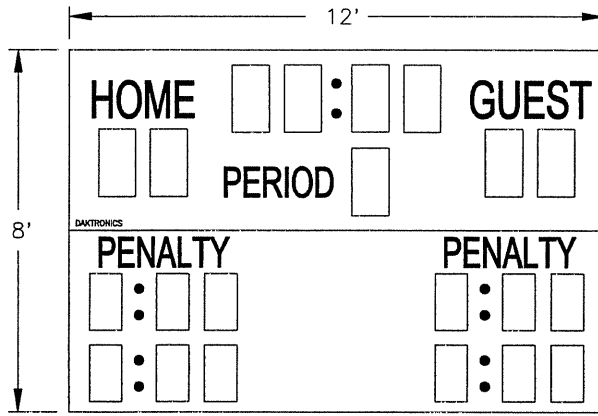

MS-2118

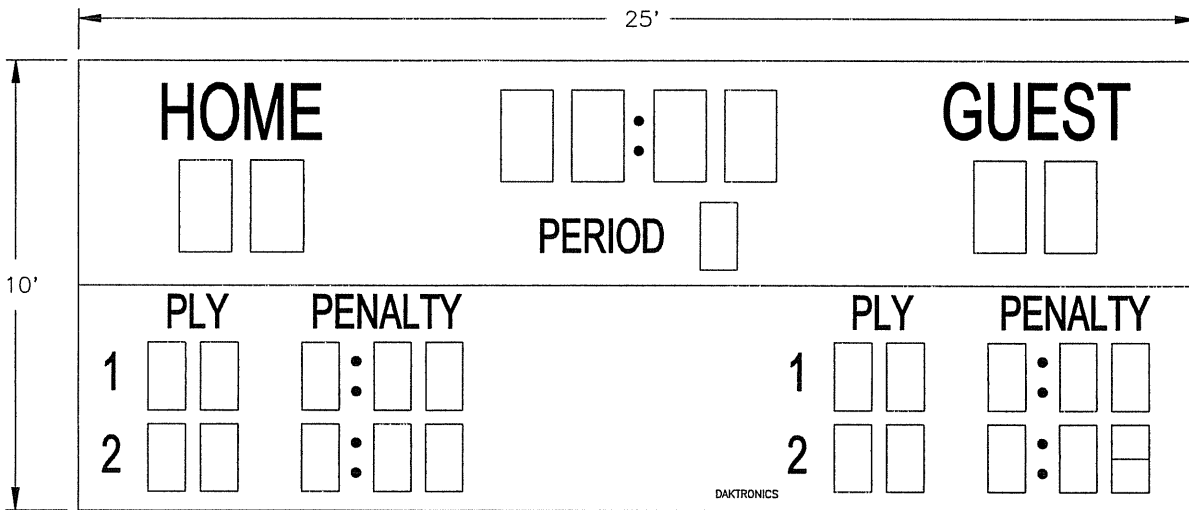

MS-2009

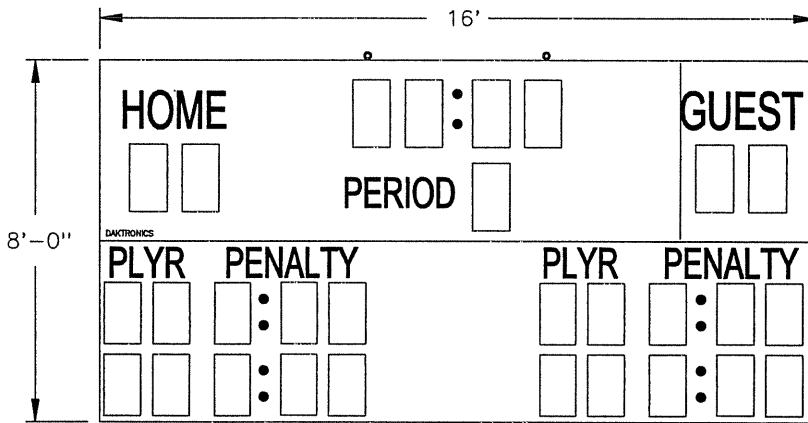


MS-2918

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR INCANDESCENT SCOREBOARDS	
TITLE: MULTIPLE SECTION MULTISPORT SCBD MODELS	
DES. BY: BPETERSON	DRAWN BY: BPETERSON DATE: 22FEB00
REVISION	APPR. BY:
SCALE: 1=50	1091-E10A-128203

02	13AUG02	ADDED MODEL MS-2918	MCOPL	
1	22FEB01	ADDED MODEL MS-2009	TWEBER	
REV.	DATE	DESCRIPTION	BY	APPR.

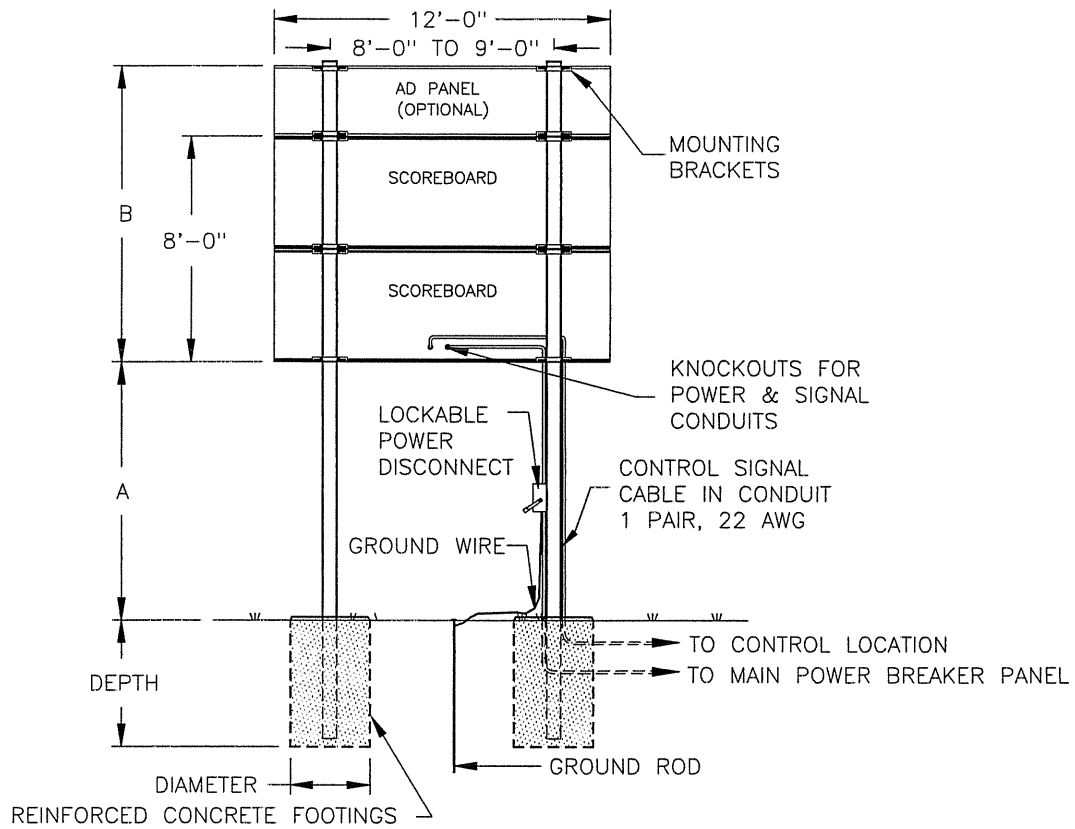

ELECTRICAL

POWER CABLE MUST HAVE A SEPERATE GROUND CONDUCTOR. SCOREBOARD MUST BE CONNECTED TO A GROUND ROD AT SCOREBOARD LOCATION.

REAR VIEW

MS-2118

MODEL MS-2118						
VERTICAL DISTANCE (A)	AD PANEL HEIGHT	COMBINED HEIGHT (B)		DESIGN WIND VELOCITY		
				70 MPH	80 MPH	100 MPH
10 FT	NONE	8'-0"	BEAM	W8x24	W8x24	W8x31
			FOOTING	3.0'x4.9'	3.0'x5.4'	3.0'x6.4'
	2 FT	10'-0"	BEAM	W8x28	W8x31	W8x35
			FOOTING	3.0'x5.4'	3.0'x5.9'	3.0'x7.0'
	4 FT	12'-0"	BEAM	W8x31	W8x35	W12x45
			FOOTING	3.0'x5.9'	3.0'x6.5'	3.0'x7.6'
12 FT	NONE	8'-0"	BEAM	W8x24	W8x28	W8x35
			FOOTING	3.0'x5.1'	3.0'x5.6'	3.0'x6.6'
	2 FT	10'-0"	BEAM	W8x31	W8x35	W12x45
			FOOTING	3.0'x5.7'	3.0'x6.2'	3.0'x7.3'
	4 FT	12'-0"	BEAM	W8x35	W10x39	W8x48
			FOOTING	3.0'x6.1'	3.0'x6.7'	3.0'x7.9'
14 FT	NONE	8'-0"	BEAM	W8x28	W8x31	W10x39
			FOOTING	3.0'x5.4'	3.0'x5.9'	3.0'x7.0'
	2 FT	10'-0"	BEAM	W10x33	W10x39	W8x48
			FOOTING	3.0'x5.9'	3.0'x6.5'	3.0'x7.6'
	4 FT	12'-0"	BEAM	W10x39	W10x45	W12x53
			FOOTING	3.0'x6.4'	3.0'x7.0'	3.0'x8.3'

FOOTING = DIAMETER X DEPTH

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS, AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENCED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.

A NOTE ABOUT BEAM NOMENCLATURE:

For a typical beam, W12x30 for example, "W" stands for "Wide-Flange Beam". The first number (12) is the approximate front to rear dimension of the beam in inches. The second number (30) is the weight per foot in pounds. This numbering is standard in the steel industry. Widths vary from 4 to 8 inches in this chart.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR INCANDESCENT SCOREBOARDS

TITLE: INSTALLATION SPECIFICATIONS, MS-2118


DES. BY: BPETERSON

DRAWN BY: BPETERSON


DATE: 22FEB00

REV.	DATE	DESCRIPTION	BY	APPR.
1	21DEC00	REVISED COLUMN SECTIONS & FOOTINGS	MVD	


REVISION	APPR. BY:	1091-R10A-128206
	SCALE: 1=80	

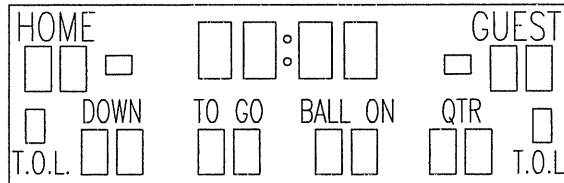

SO-1830

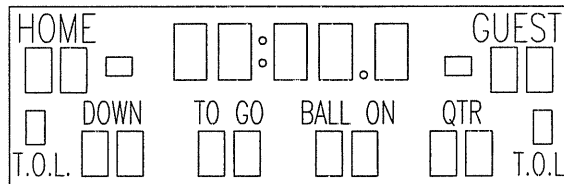

SO-1930

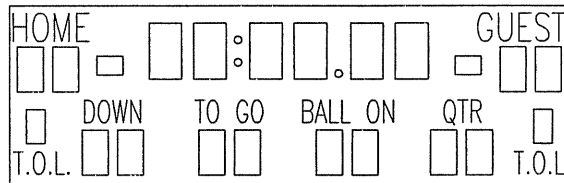

SO-2030

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR INCANDESCENT SCOREBOARDS

TITLE: CAPTION OPTIONS, FOOTBALL

DES. BY: BPETERSON

DRAWN BY: BPETERSON

DATE: 23FEB00


REVISION

APPR. BY:

SCALE: 1 = 100

1091-R08A-128281

REV.	DATE	DESCRIPTION	BY	APPR.

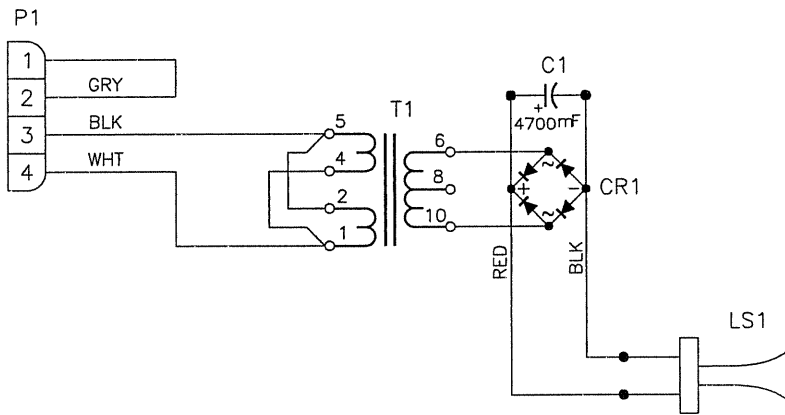

OA-1091-1214

NOTE: THIS ASSEMBLY DOES NOT INCLUDE THE HORN. IT IS ONLY SHOWN FOR PROPER CONNECTION.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: STANDARD SCOREBOARDS


TITLE: SCHEMATIC, OUTDOOR SCBD 12VDC TRUMPET HORN, AS5K

DES. BY: DRAWN BY: JCM DATE: 06MAR00

01	18 MAY 01	PART NUMBER WAS CHANGED FROM -1213 TO -1214.	MWM	
REV.	DATE	DESCRIPTION	BY	APPR.

REVISION	APPR. BY:
01	SCALE: NONE

1091-R03A-128938

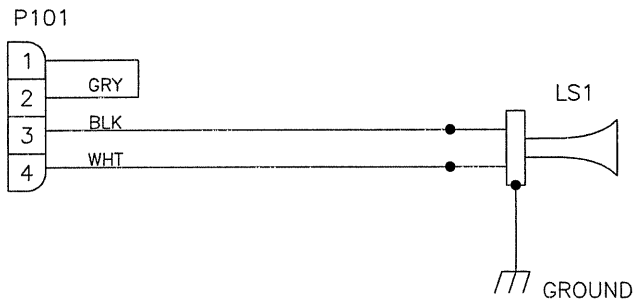


0A-1091-0470

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: STANDARD OUTDOOR SCOREBOARDS			
TITLE: SCHEMATIC; 120VAC TRUMPET HORN			
DES. BY:	DRAWN BY: RASMUS	DATE: 16MAY00	
REVISION	APPR. BY:	1091-R03A-132173	
01	SCALE: 1=1		

1	07SEP00	ADDED GND WIRE TO ASSEMBLY	CMC	
REV.	DATE	DESCRIPTION	BY	APPR.

OP-1192-0011 16 COLUMN LED DRIVER II

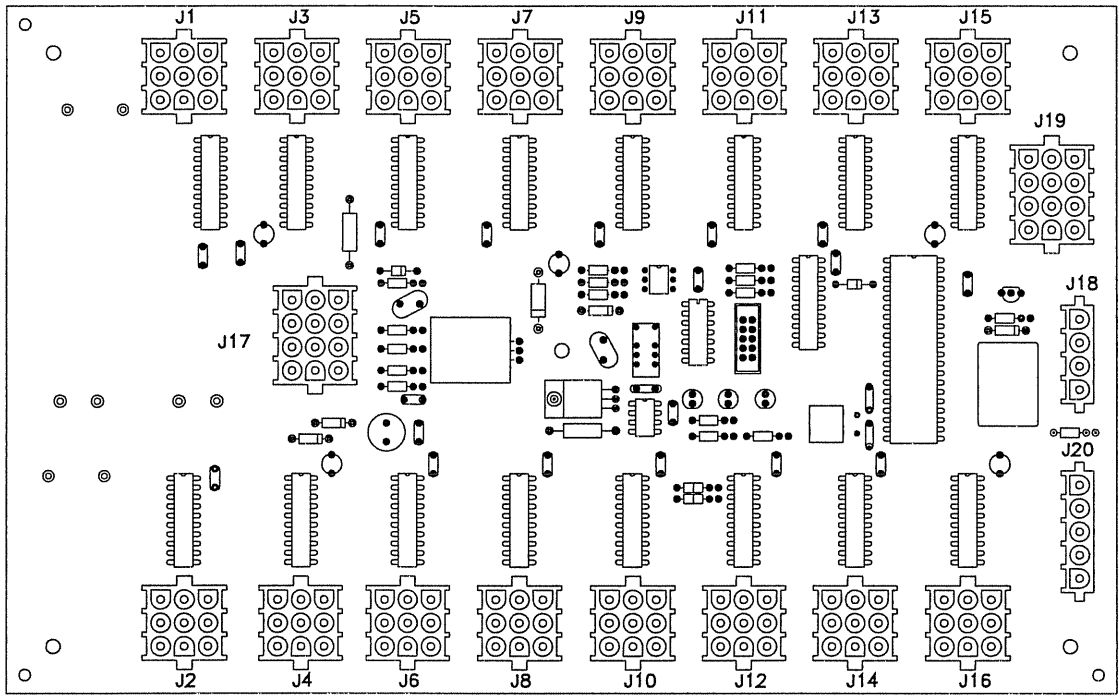

J17 MAIN	
PIN	FUNCTION
1	SIG-P
2	SIG-N
3	SIG2-P
4	CLOUT-P
5	CLOUT-N
6	N/C
7	GND-N
8	EARTH-N
9	N/C
10	GND-N
11	+24A-P
12	+24B-P

J1-16 DIGIT	
PIN	FUNCTION
1	SEGC-N
2	SEGB-N
3	SEGA-N
4	SEGF-N
5	SEGE-N
6	SEGD-N
7	+VCC-P
8	SEGH-N
9	SEGG-N

J19 ADDRESS	
PIN	FUNCTION
1	GND-N
2	ADD0-N
3	ADD1-N
4	GND-N
5	ADD2-N
6	ADD3-N
7	GND-N
8	ADD4-N
9	ADD5-N
10	GND-N
11	ADD6-N
12	ADD7-N

J18 RELAY	
PIN	FUNCTION
1	HORNOUT-N
2	AUXOUT-N
3	120SW-P
4	120SW-N

J20 PROTOCOL	
PIN	FUNCTION
1	GND-N
2	PRO-N
3	PR1-N
4	PR2-N
5	TOD-N

NOTE

- WITH NO ADDRESS PINS SELECTED THE DRIVER WILL DEFAULT TO A/S 4000 PROTOCOL
- GREEN LED INDICATES THE DRIVER HAS POWER
- RED LED WILL BE ON OR BLINKING WHEN THE DRIVER IS RECEIVING SIGNAL
- AMBER LED INDICATES LED DRIVER STATUS, LED WILL BE BLINKING TO INDICATE THAT THE DRIVER IS RUNNING, IF THE LED IS OFF OR ON SOLID ALL OF THE TIME, THEN THE DRIVERS CPU IS NOT FUNCTIONING AND MAY NEED TO BE RESET OR REPLACED.
- REFER TO DRAWINGS A-115078 & A-115079 FOR J19 ADDRESS SETTINGS FOR THIS DRIVER.
- REFER TO DRAWING A-115081 FOR J20 PROTOCOL SETTINGS FOR THIS DRIVER.
- REDRIVE CIRCUIT IS PROCESSOR REFRESHED (REFER TO DWG A-128429 FOR FURTHER INFORMATION ON THE CURRENT LOOP REDRIVE CIRCUIT SPECIFICATIONS)

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ:

TITLE: 16 COLUMN LED DRIVER II SPECIFICATIONS

DES. BY: EB

DRAWN BY: NWRIEDT

DATE: 11 JAN 01

REVISION

APPR. BY:

00

SCALE: NONE

1192-R07A-134371

REV.	DATE	DESCRIPTION	BY	APPR.

AMBER
18" LED




OR

RED
18" LED



18" LED

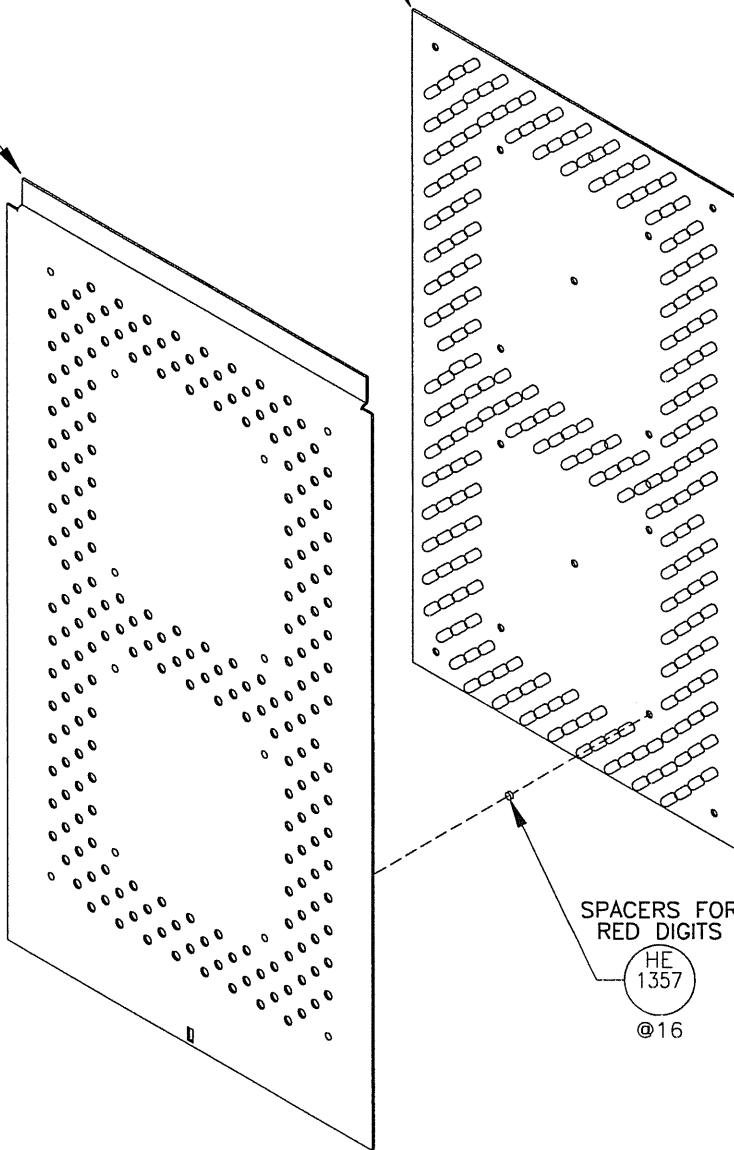

SPACERS FOR
RED DIGITS




OR

SPACERS FOR
AMBER DIGITS



REV.	DATE	DESCRIPTION	BY	APPR.
03	28AUG02	ADDED HE-1376 REMOVED 24" LED DIGIT ASSY NUMBERS	MCOPL	
2	29JUN01	ADDED 18" AND 24" AMBER DIGIT PART NUMBERS	MCOPL	
1	8DEC00	UPDATED ATTACHING TO SHOW PEM STUD AND SPACER	GDB	

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OUTDOOR LED DIGIT SCOREBOARDS	
TITLE: DIGIT ASSEMBLY 18" RES/ORG-AMBER	
DES. BY: GBREEN	DRAWN BY: GBREEN
DATE: 24JUL00	
REVISION	APPR. BY:
SCALE: 1=5	1192-E08A-135662

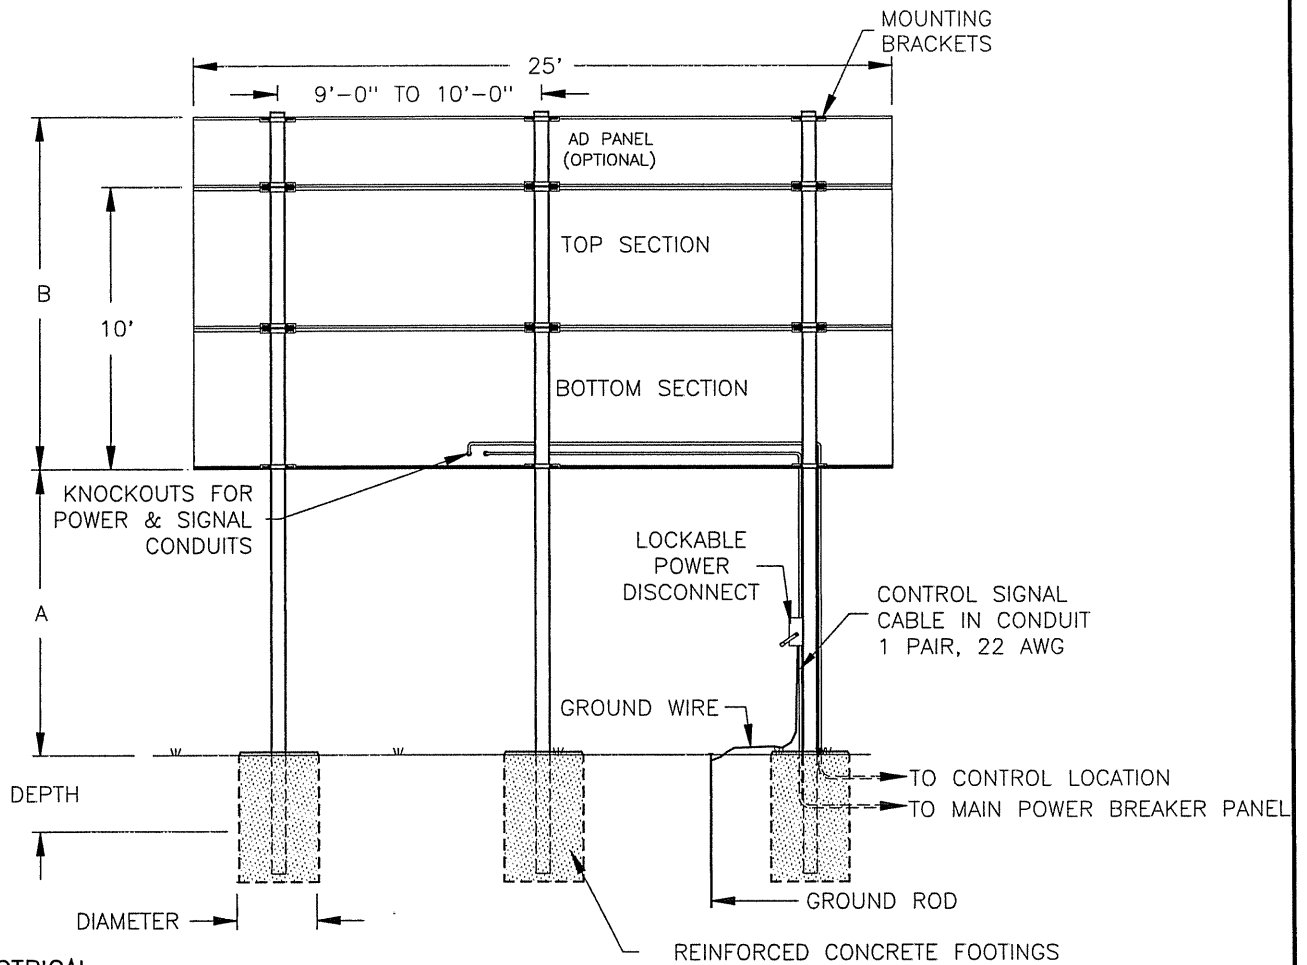

ELECTRICAL

POWER CABLE MUST HAVE A SEPERATE GROUND CONDUCTOR. SCOREBOARD MUST BE CONNECTED TO A GROUND ROD AT SCOREBOARD LOCATION.

REAR VIEW
MS-2009

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS, AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENCED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.

A NOTE ABOUT BEAM NOMENCLATURE:

For a typical beam, W12x30 for example, "W" stands for "Wide-Flange Beam". The first number (12) is the approximate front to rear dimension of the beam in inches. The second number (30) is the weight per foot in pounds. This numbering is standard in the steel industry. Widths vary from 4 to 8 inches in this chart.

MODEL MS-2009						
VERTICAL DISTANCE (A)	AD PANEL HEIGHT	COMBINED HEIGHT (B)		DESIGN WIND VELOCITY		
				70 MPH	80 MPH	100 MPH
10 FT	NONE	10'-0"	BEAM	W12X26	W12X26	W10X33
			FOOTING	3'x7.5'	3'x8.2'	3'x9.8'
	2 FT	12'-0"	BEAM	W14X30	W10X33	W12X40
			FOOTING	3'x8.2'	3'x9.0'	3'x10.7'
	4 FT	14'-0"	BEAM	W10X33	W10X39	W12X45
			FOOTING	3'x8.8'	3'x9.7'	3'x11.5'
12 FT	NONE	10'-0"	BEAM	W14X30	W10X33	W12X40
			FOOTING	3'x7.8'	3'x8.6'	3'x10.2'
	2 FT	12'-0"	BEAM	W10X33	W14X38	W14X43
			FOOTING	3'x8.5'	3'x9.4'	3'x11.1'
	4 FT	14'-0"	BEAM	W10X39	W12X40	W14X53
			FOOTING	3'x9.1'	3'x10.1'	3'x11.9'
14 FT	NONE	10'-0"	BEAM	W10X33	W10X35	W12X40
			FOOTING	3'x8.1'	3'x9.0'	3'x10.6'
	2 FT	12'-0"	BEAM	W10X38	W12X40	W14X48
			FOOTING	3'x8.8'	3'x9.7'	3'x11.6'
	4 FT	14'-0"	BEAM	W12X40	W12X45	W14X61
			FOOTING	3'x9.5'	3'x10.4'	3'x12.4'

FOOTING = DIAMETER X DEPTH

ASSUMPTIONS: UBC 1997 CODE
UBC SOIL CLASS 3 (2000 PSF)


DAKTRONICS, INC. BROOKINGS, SD 57006

REV.	DATE	DESCRIPTION	BY	APPR.
02	07 APR 03	EXTENDED 'B' DIMENSION TO TOP OF ADD PANEL.	JJS	
01	06AUG01	ADDED POLE TO CENTER OF SCOREBOARD	MCOPL	


PROJ: OUTDOOR INCANDESCENT SCOREBOARDS	
TITLE: INSTALLATION SPECIFICATIONS, MS-2009	
DES. BY: RNEYENS	DRAWN BY: RNEYENS
DATE: 9FEB01	
REVISION	APPR. BY:
SCALE: 1=80	1091-R10A-144415

832 LED TNMC

848 LED TNMC

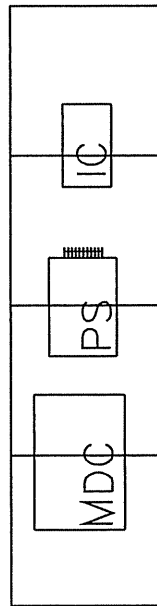


FRONT VIEW

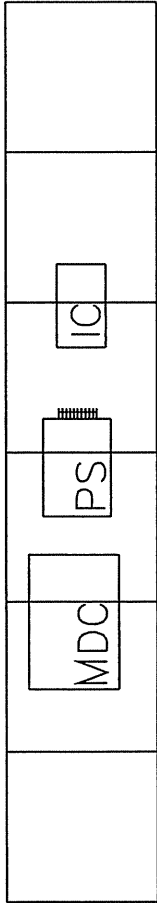

FRONT VIEW




MDC CONTROLLER
0A-1146-0061
MOUNTED TO BACK



POWER SUPPLY
0A-1213-4013
MOUNTED TO BACK




TNMC INTERFACE CARD
0P-1146-0020
MOUNTED TO BACK

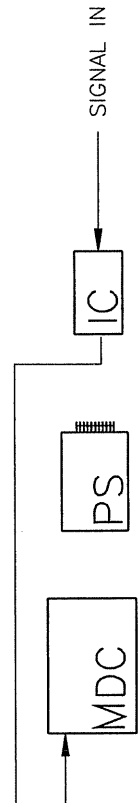


REV.	DATE	DESCRIPTION	BY	APPR.
03	22JAN02	CHANGED PART 0P-1146-0016 TO 0P-1146-0020	MCOPL	
02	28MAR01	REVISED SIGNAL IN DIAGRAM	MCOPL	
01	12MAR01	CHANGED DRV TO MDC	MCOPL	

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ:	OUTDOOR LED SCOREBOARDS
TITLE:	COMPONENT LAYOUT; 832/848 LED TNMC
DES. BY:	MCOPLAN
DRAWN BY:	MCOPLAN
DATE:	22FEB01
REVISION	APPR. BY:
	SCALE: NONE
1192-E07A-145045	

SLAVE CONFIGURATION
OA-1192-1007

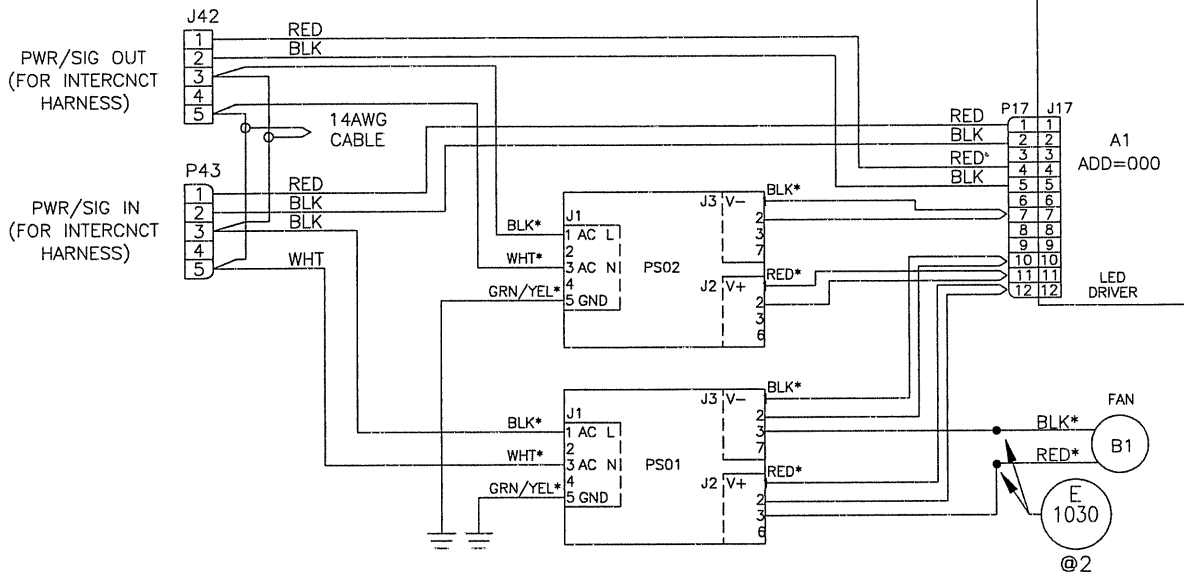

MASTER CONFIGURATION
OA-1192-1006

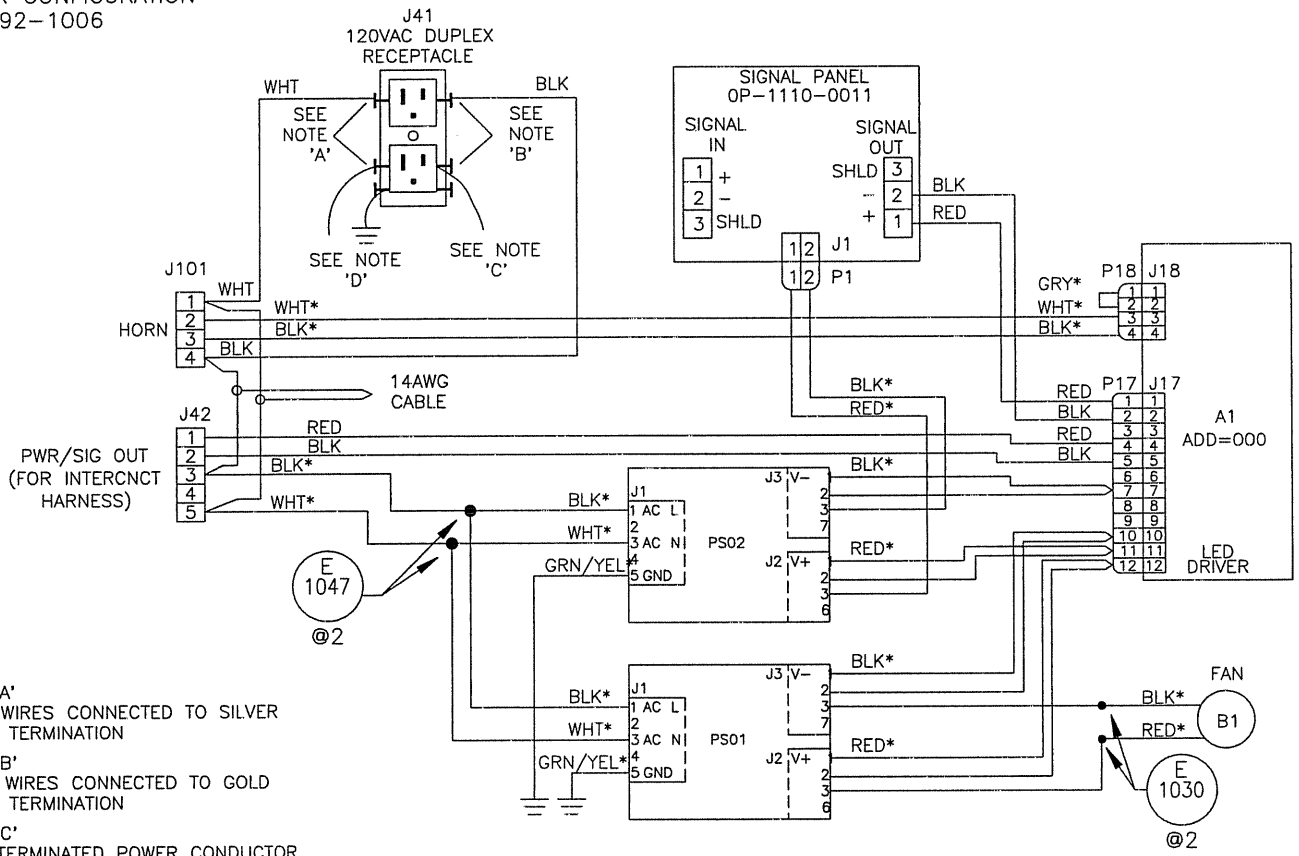

- NOTES:
- NOTE 'A'
WHITE WIRES CONNECTED TO SILVER SCREW TERMINATION
 - NOTE 'B'
BLACK WIRES CONNECTED TO GOLD SCREW TERMINATION
 - NOTE 'C'
FIELD TERMINATED POWER CONDUCTOR
 - NOTE 'D'
FIELD TERMINATED NEUTRAL AND GROUND CONDUCTOR

ALL POWER CONDUCTORS ARE 14AWG EXCEPT * INDICATES 18AWG CONDUCTORS.
ALL SIGNAL CONDUCTORS ARE 22AWG CONDUCTORS.

REFERENCE DWG 1192-R06B-152269 FOR DETAILED CABLE ASSEMBLY DIAGRAM.

REV.	DATE	DESCRIPTION	BY	APPR.
4	26 JUN 02	CHANGED SIGNAL CONNECTION FOR CABLE COMING OUT OF J101-1 AND -2	NMB	
03	14 MAY 02	REMOVED P43 PWR/SIG INPUT FROM MASTER ASSY. REMOVED HORN FROM SLAVE ASSY. REDID ALL THE WIRING.	MWM	
02	15 JAN 02	ADDED 1WRES COMING FROM PS02 J3-3 AND J2-3 INTO THE SIGNAL PANEL	NMB	
01	17 OCT 01	UPDATED DWG TO SHOW FAN BUIT CONNECTORS UPDATED PWS CONNECTIONS. UPDATED TITLE. MOVED WHT& BLK TO NEW PINS ON J42 & P43	MWM	

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: **OUTDOOR LED SCOREBOARDS**



TITLE: **SCHEMATIC; GEN II OUTDOOR LED, 16 COLUMN DRV**

DES. BY: _____ DRAWN BY: **CMCADAM** DATE: **13AUG01**

REVISION _____ APPR. BY: _____

SCALE: **1 = 1**

1192-R03A-154330

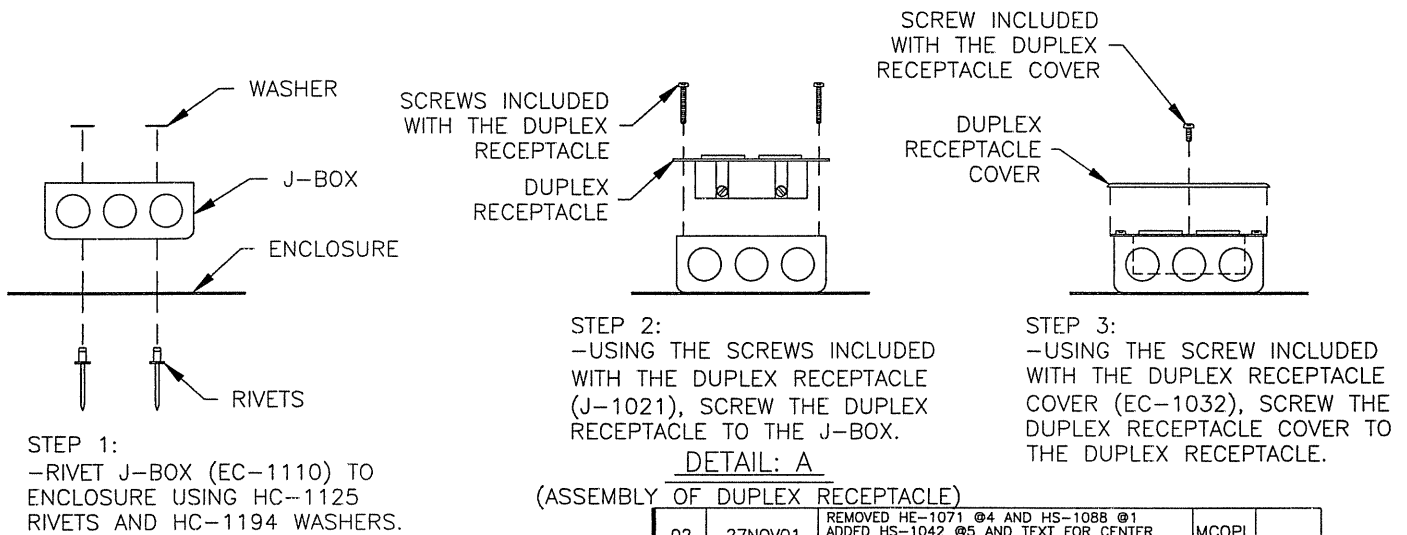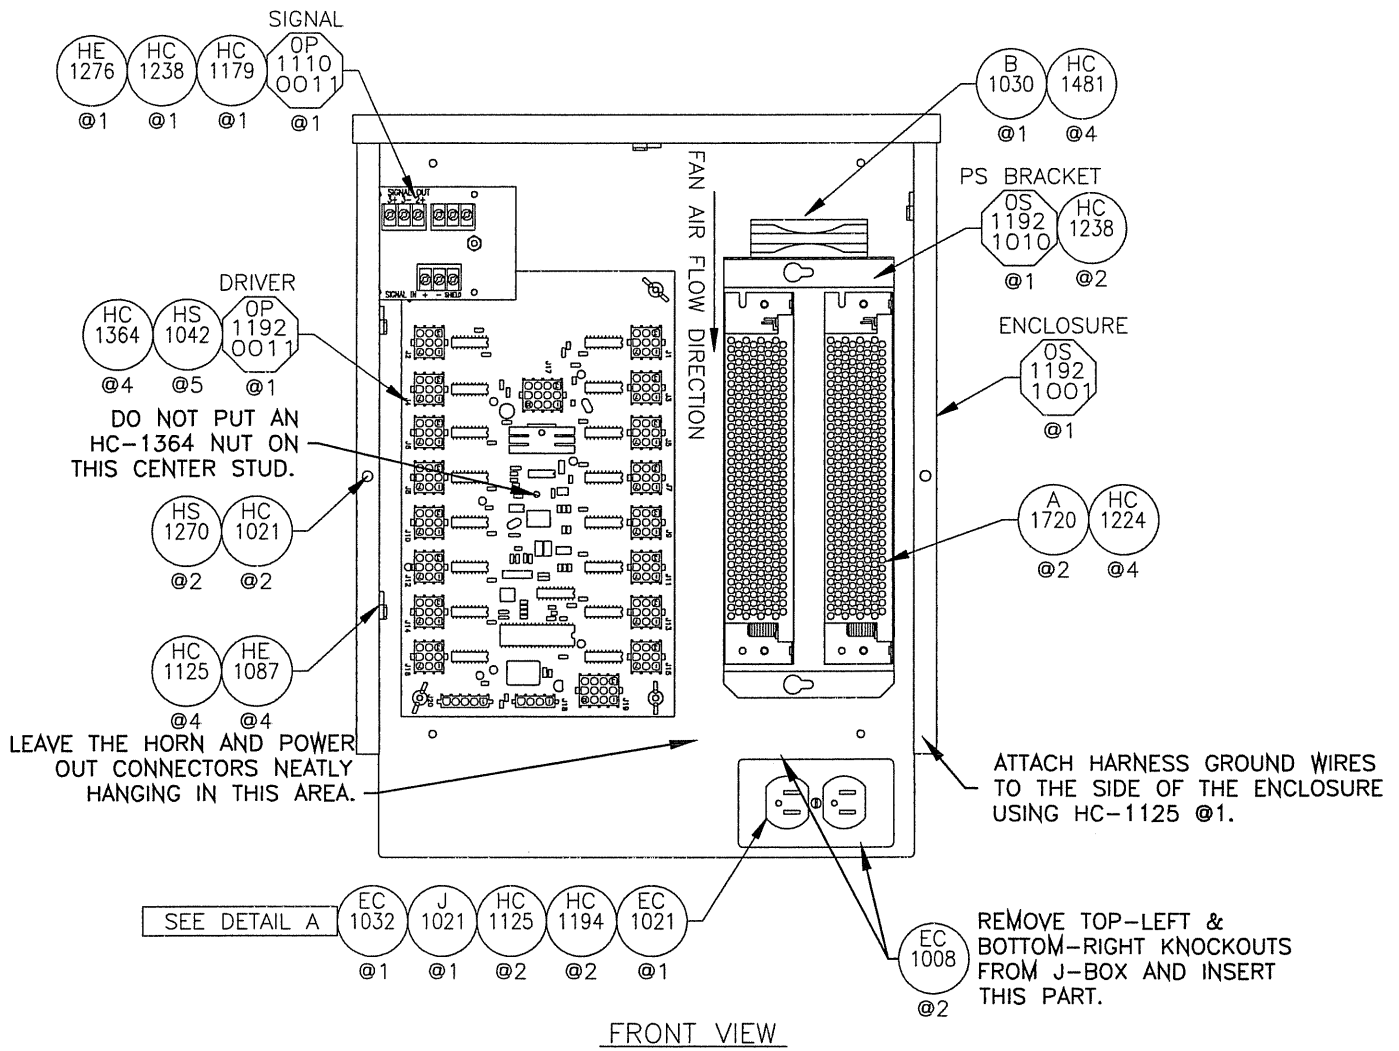


02	27NOV01	REMOVED HE-1071 @4 AND HS-1088 @1 ADDED HS-1042 @5 AND TEXT FOR CENTER DRIVER STUD, ADDED OS-1192-1010	MCOPL	
01	18OCT01	ADDED DETAIL A FOR DUPLEX RECEPTACLE ASSY	MCOPL	

05	28 AUG 02	ADDED FAN AIR FLOW DIRECTION	MRB	
04	19JUN02	REPLACED EC-1110 WITH EC-1021	MCOPL	
03	27 MAR 02	REPLACED OP-1033-0114 W/ OP-1110-0011	CJB	
REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006				
PROJ: OUTDOOR LED SCOREBOARDS				
TITLE: DRIVER; 16 COL OUTDOOR LED, GEN II				
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN		DATE: 06SEP01
REVISION	APPR. BY:	1192-E10A-154792		
05	SCALE: 1=5			

BA-1518-11

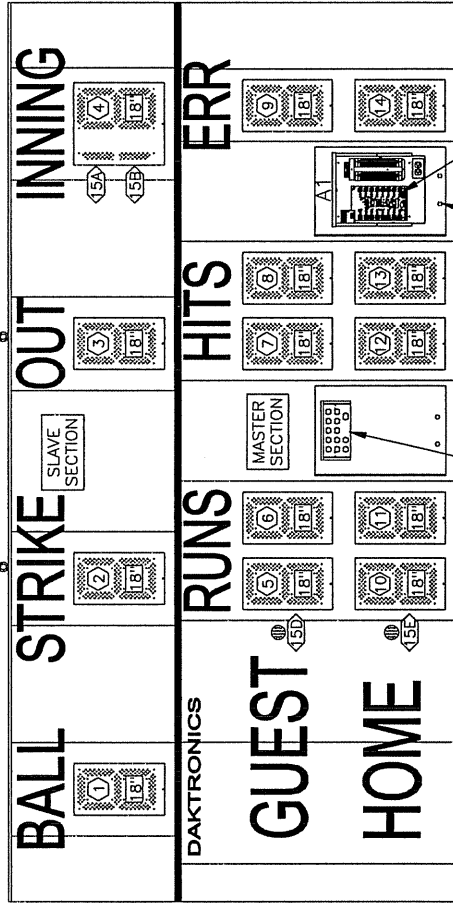


ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

KNOCKOUTS FOR 1/2" CONDUIT

CONNECTOR PANEL FOR DIGIT HARNESS FROM UPPER DISPLAY SECTION.

FRONT VIEW

BA-1518-11 W/ 832-10 LED TNMC

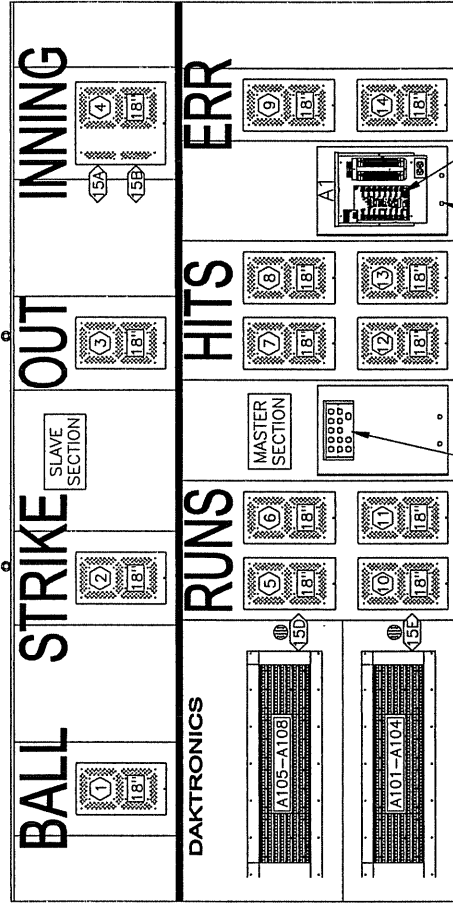

ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

KNOCKOUTS FOR 1/2" CONDUIT

CONNECTOR PANEL FOR DIGIT HARNESS FROM UPPER DISPLAY SECTION.

FRONT VIEW


- ⑫ = LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
- ◁15A▷ = LED DRIVER CONNECTOR AND SEGMENT (PIN) NO. WIRED TO THAT INDICATOR
- 18" = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND POWER/SIGNAL ENCLOSURE.

01	19NOV01	ADDED TNMC VERSION	MCOPL	
REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; BA-1518-11			
DES. BY: MCOPLAN	DRAWN BY: MCOPL	DATE: 18OCT01	
REVISION	APPR. BY:	1192-E07A-157670	
	SCALE: 1=40		

BA-1524-11

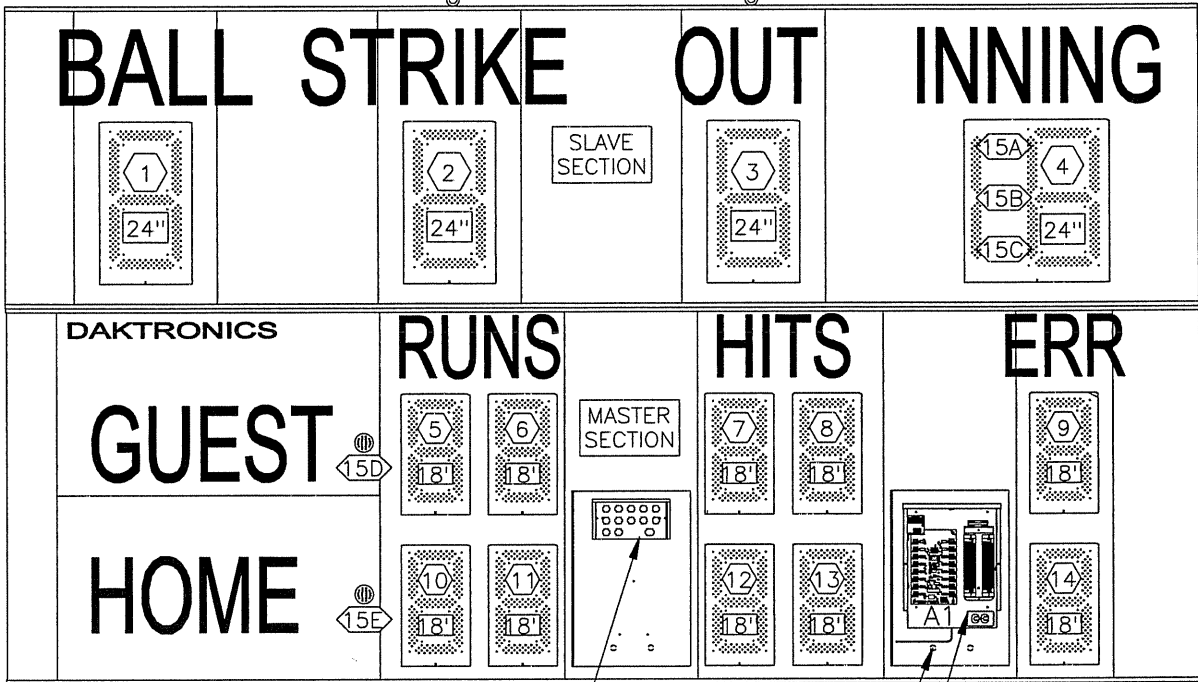

CONNECTOR PANEL FOR DIGIT HARNESS FROM UPPER DISPLAY SECTION.

KNOCKOUTS FOR 1/2" CONDUIT

ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

- ⑫ = LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
- ⑮A = LED DRIVER CONNECTOR AND SEGMENT (PIN) NO. WIRED TO THAT INDICATOR
- 18" = DIGIT SIZE


HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; BA-1524-11			
DES. BY: MCOPLAN	DRAWN BY: MCOPLAN	DATE: 23OCT01	
REVISION	APPR. BY:	1192-E07A-157842	
	SCALE: 1=30		

REV.	DATE	DESCRIPTION	BY	APPR.

PWR/ SIGNAL INTERCONNECT HARNESS BETWEEN SECTIONS.
FOLLOW FINAL ASSY INSTRUCTIONS FOR ROUTING AND
COILING FOR SHIPPING.

PWR/ SIGNAL
INTERCONNECT HARNESS.
SEE CHART.

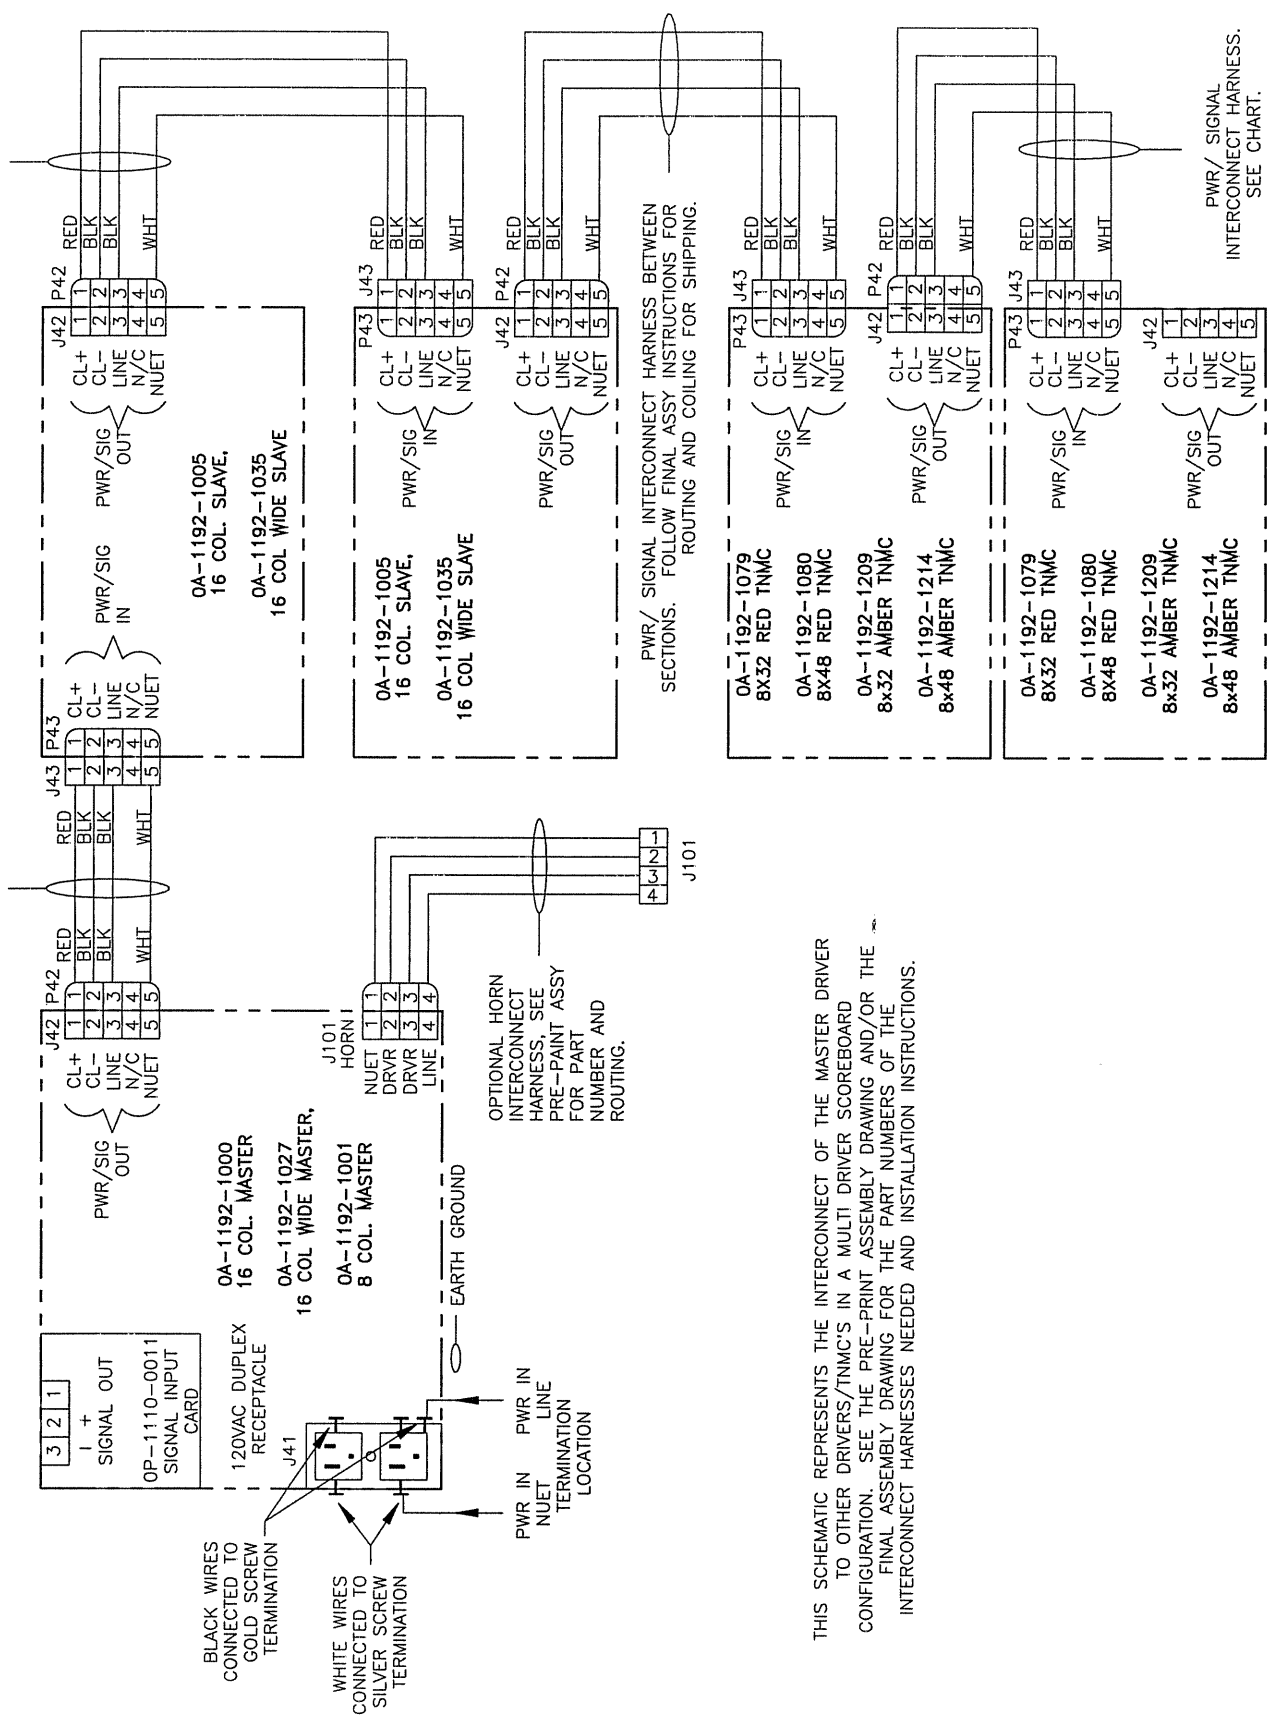

PWR/ SIGNAL INTERCONNECT HARNESS BETWEEN SECTIONS.
FOLLOW FINAL ASSY INSTRUCTIONS FOR
ROUTING AND COILING FOR SHIPPING.


THIS SCHEMATIC REPRESENTS THE INTERCONNECT OF THE MASTER DRIVER
TO OTHER DRIVERS/TNMC'S IN A MULTI DRIVER SCOREBOARD
CONFIGURATION. SEE THE PRE-PRINT ASSEMBLY DRAWING AND/OR THE
FINAL ASSEMBLY DRAWING FOR THE PART NUMBERS OF THE
INTERCONNECT HARNESSES NEEDED AND INSTALLATION INSTRUCTIONS.

PWR/ SIGNAL
INTERCONNECT HARNESS.
SEE CHART.

REV.	DATE	DESCRIPTION	BY	APPR.
02	20 MAY 02	REPLACED OP-1033-0114 WITH OP-1110-0011 AND REMOVED J101 FOR HORN. ADDED AMBER TNMC.	THS	
01	23 JAN 02	ADDED WIRE COLORS, UPDATED WIRE CONNECTION.	MWM	

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: SCHEMATIC; GEN II OD LED, 3 DRVR, MULTI SECT & TNMC			
DES. BY:	DRAWN BY: MMILLER		DATE: 29 OCT 01
REVISION	APPR. BY:	1192-R10A-158084	
	SCALE: 1 = 1		

OA-1192-1079 - 8X32 RED LED TNMC
 OA-1192-1080 - 8X48 RED LED TNMC

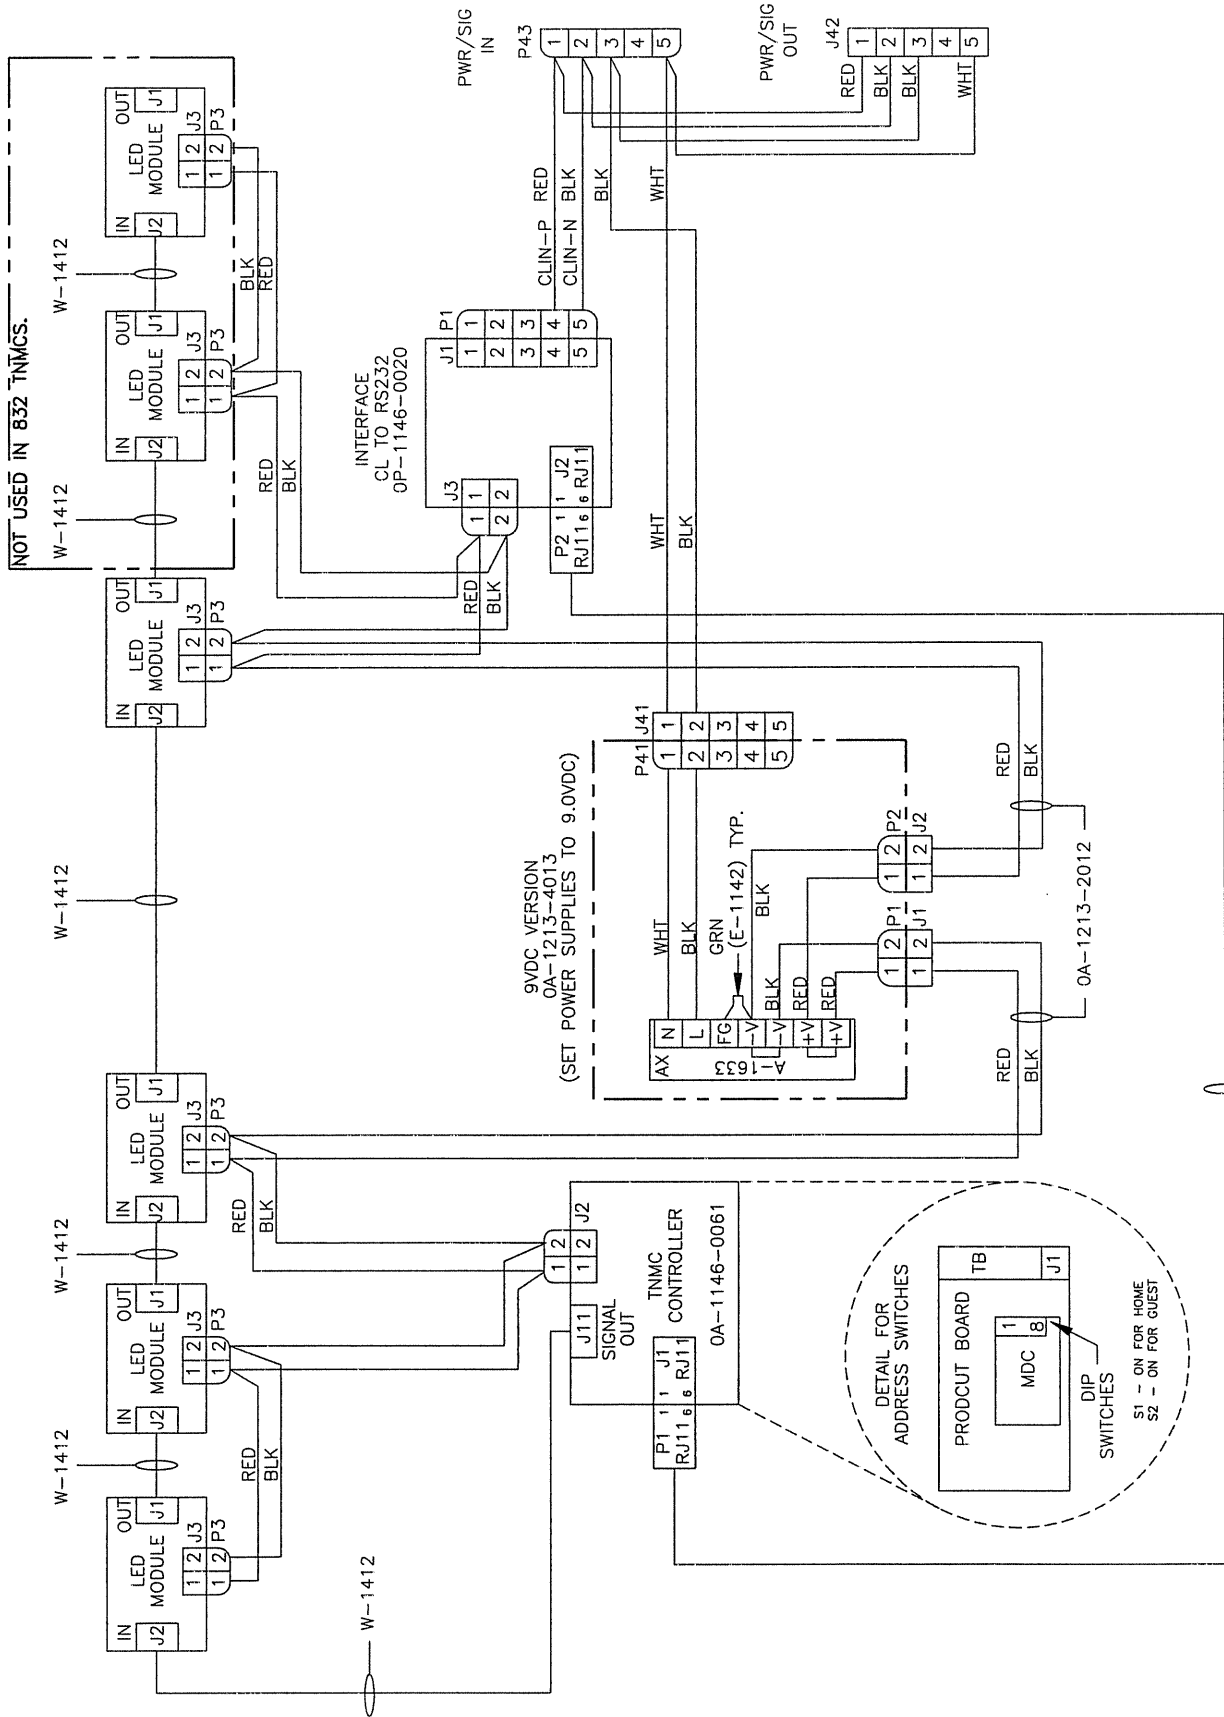


DAKTRONICS, INC. BROOKINGS, SD 57006				
PROJ: OUTDOOR LED DIGIT SCOREBOARDS				
TITLE: SHCEMATIC; LED TNMC, GEN II				
DES. BY: MILLER		DRAWN BY: MILLER		DATE: 07 NOV 01
REVISION	APPR. BY:	1192-R03A-158552		
	SCALE: 1 = 1			

01	19 NOV 01	CHANGED PART NUMBER FOR RJ11 CABLE FROM J2 ON INTERFACE TO J1 ON TNMC CONTROLLER	MWM	
REV.	DATE	DESCRIPTION	BY	APPR.

MODELS FB-1630L & FB-1830L

DISTANCE TO BOTTOM OF SCOREBOARD (FT)	DOES SCOREBOARD HAVE ATTACHED AD PANEL?	DESIGN WIND VELOCITY (MPH)		
		70	80	100
A				
10	NO	W10x22 3.0 X 6.5	W10x22 3.0 X 7.2	W12x26 3.0 X 8.5
	YES	W14x30 3.0 X 7.9	W10x33 3.0 X 8.7	W16x40 3.0 X 10.3
12	NO	W8X24 3.0 X 6.8	W12x26 3.0 X 7.5	W14x30 3.0 X 8.9
	YES	W10x33 3.0 X 8.2	W12x35 3.0 X 9.0	W12x40 3.0 X 10.7
14	NO	W12x26 3.0 X 7.5	W10x30 3.0 X 8.3	W14x38 3.0 X 9.8
	YES	W10x33 3.0 X 8.5	W12x40 3.0 X 9.4	W14x48 3.0 X 11.1
16	NO	W14x30 3.0 X 7.4	W10x33 3.0 X 8.2	W12x40 3.0 X 9.6
	YES	W10x39 3.0 X 8.8	W14x43 3.0 X 9.7	W14x53 3.0 X 11.4
18	NO	W10x33 3.0 X 7.7	W14x38 3.0 X 8.4	W12x40 3.0 X 9.9
	YES	W12x40 3.0 X 9.0	W14x48 3.0 X 10.0	W14x61 3.0 X 11.7
20	NO	W10x39 3.0 X 8.4	W12x40 3.0 X 9.2	W14x48 3.0 X 10.3
	YES	W12x45 3.0 X 9.4	W14x53 3.0 X 10.3	W14x61 3.0 X 12.2

W6x12 ← RECOMMENDED BEAM SECTION FOR MOUNTING SCOREBOARD
 2.00 X 4.25 ← RECOMMENDED FOOTINGS IN FEET (DIAMETER X DEPTH)

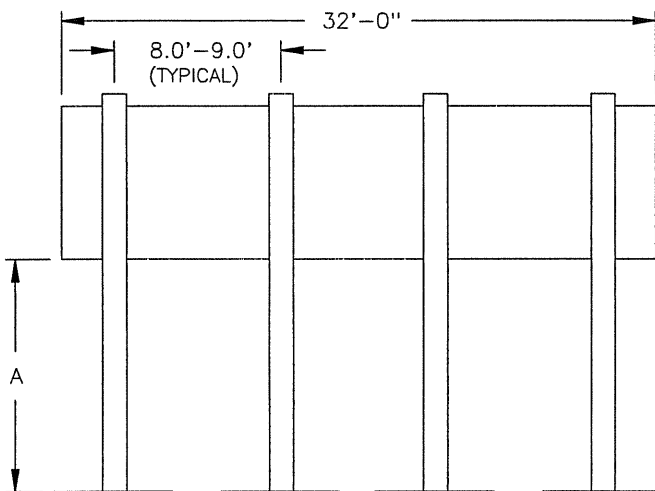

REAR VIEW

NOTE:
 RECOMMENDATIONS FOR A DISPLAY WITH AN ATTACHED AD PANEL WERE CALCULATED USING A 48" TALL AD PANEL.
 UBC 97 CODE USED WITH SOIL CLASS 3.

INFORMATION GIVEN IS FOR ESTIMATING PURPOSES ONLY. COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENCED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR SCOREBOARDS

TITLE: BEAM AND FOOTING RECOMMENDATIONS, FB-XX30L

DES. BY: MCOPL/RNEYEN

DRAWN BY: MCOPLAN

DATE: 04JAN02


REVISION

APPR. BY:

SCALE: NONE

1091-R08A-158779

REV	DATE	DESCRIPTION	BY	APPR.

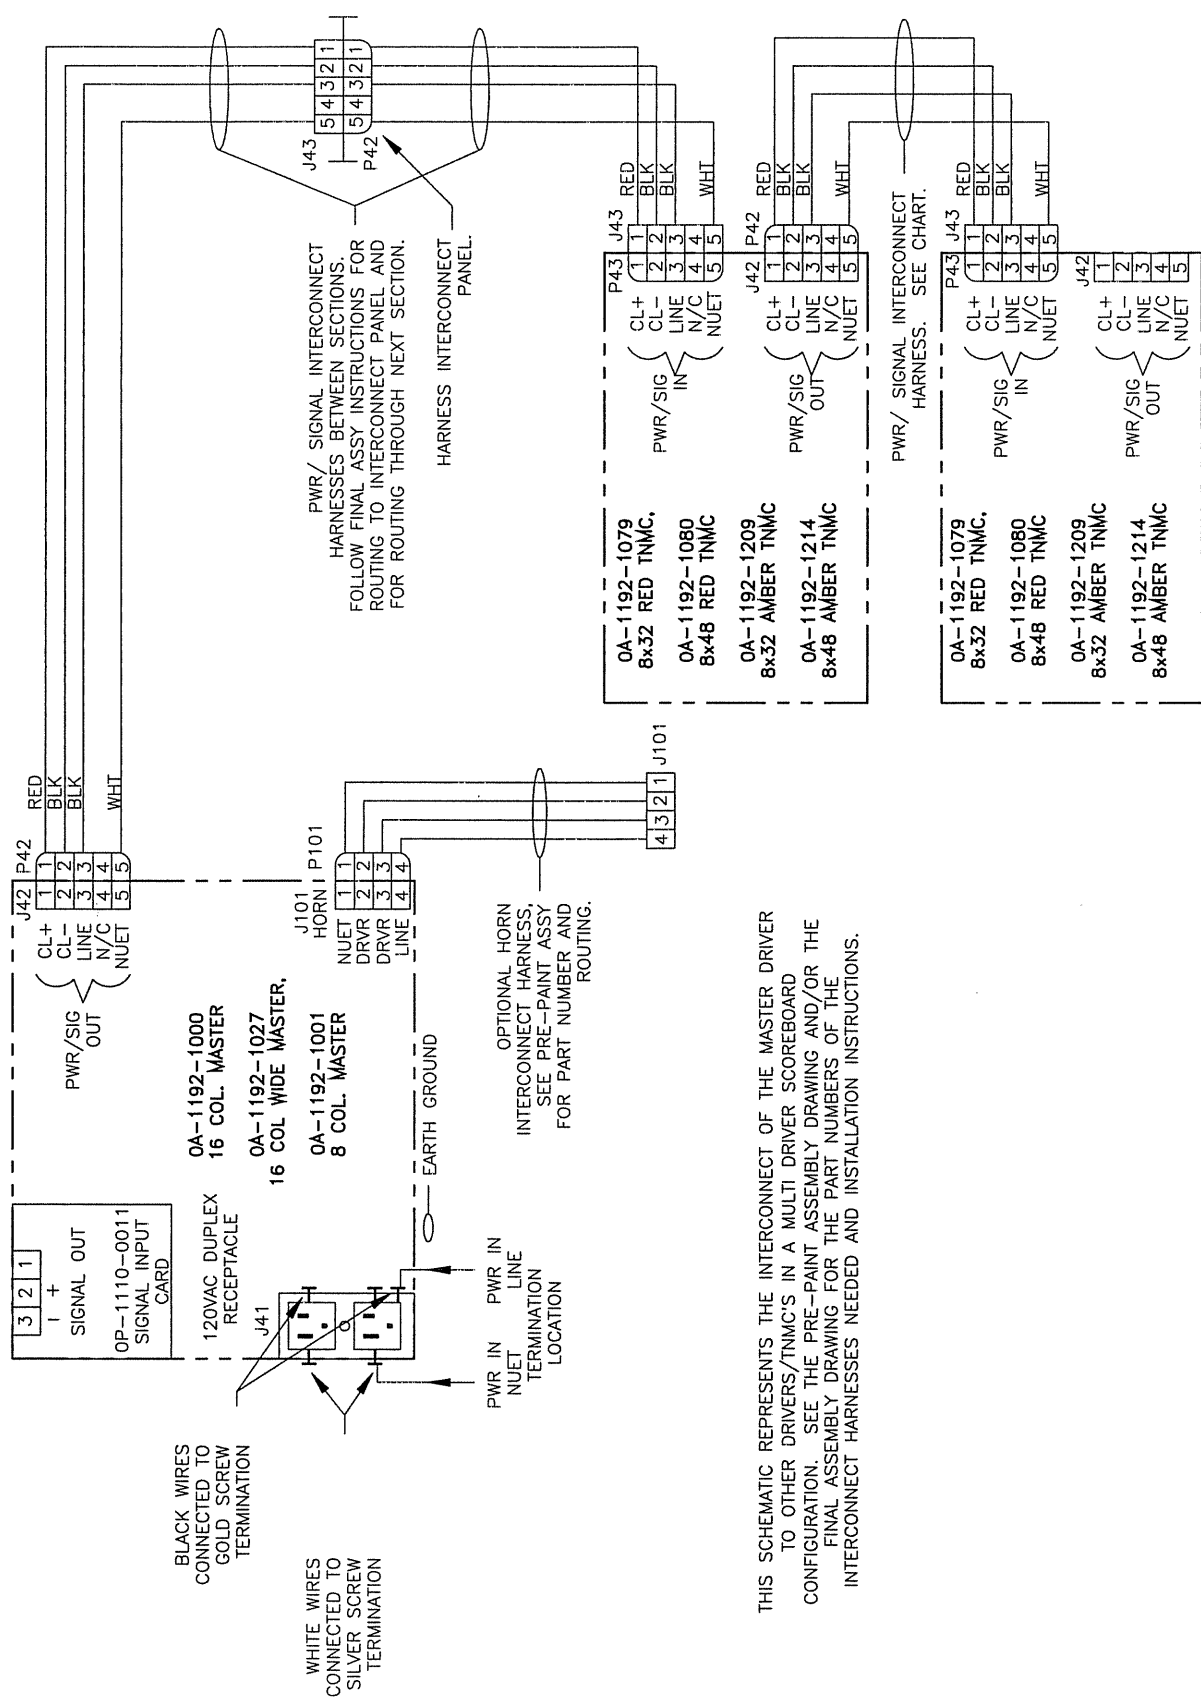

- 0A-1192-1079 8x32 RED TNMC, P43 J43
- 0A-1192-1080 8x48 RED TNMC, P43 J43
- 0A-1192-1209 8x32 AMBER TNMC, J42 P42
- 0A-1192-1214 8x48 AMBER TNMC, J42 P42
- 0A-1192-1079 8x32 RED TNMC, P43 J43
- 0A-1192-1080 8x48 RED TNMC, P43 J43
- 0A-1192-1209 8x32 AMBER TNMC, J42 P42
- 0A-1192-1214 8x48 AMBER TNMC, J42 P42

REV.	DATE	DESCRIPTION	BY	APPR.
03	17 MAY 02	REPLACED OP-1033-0114 WITH OP-1110-0011. REMOVED J101 HORN JACK.	THS	
02	21 JAN 02	ADDED WIRE CABLE COLORS CORRECTED WIRE CONNECTION	THS	
01	26 DEC 01	ADDED HORN INTERCONNECT AND HARNESS INTERCONNECT PANEL.	MWM	

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OUTDOOR LED SCOREBOARDS	
TITLE: SCHEMATIC; GEN II, OD LED, 1 DRVR DISPLAY & TNMC	
DES. BY: MILLER	DRAWN BY: MILLER
DATE: 27 NOV 01	
REVISION	APPR. BY:
SCALE: 1=1	
1192-R01A-159419	

BA-3724-11 W/ 848-10 LED TNMC

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL).

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @2. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL).

KNOCKOUT FOR 1/2" CONDUIT

CONNECTOR PANEL FOR DIGIT HARNESS.

The diagram shows a scoreboard layout with the following sections from left to right: MASTER SECTION (containing AT BA and BALANCE), STRIKE, OUT, H/E, and a SLAVE SECTION. Below these are columns numbered 1 through 10, followed by RUNS, HITS, and ERR. Each column contains two rows of LED driver callouts. The callouts are: Row 1: A1 (hexagon) and 24" (rectangle); Row 2: A2 (hexagon) and 18" (rectangle); Row 3: A3 (hexagon) and 18" (rectangle). The 'SLAVE SECTION' label is repeated under columns 1-3, 4-6, and 7-9.

FRONT VIEW

A1 (hexagon) = LED DRIVER NUMBER & A2 (hexagon) = LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

18" (rectangle) = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.


REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; BA-3724-11 W/ 848-10 TNMC			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 03DEC01			
REVISION	APPR. BY:	1192-E07A-159615	
		SCALE: 1=50	

THIS SCHEMATIC REPRESENTS THE INTERCONNECT OF THE MASTER DRIVER TO OTHER DRIVERS/TNMC'S IN A MULTI DRIVER SCOREBOARD CONFIGURATION. SEE THE PRE-PRINT ASSEMBLY DRAWING AND/OR THE FINAL ASSEMBLY DRAWING FOR THE PART NUMBERS OF THE INTERCONNECT HARNESSES NEEDED AND INSTALLATION INSTRUCTIONS.

PWR/SIG INTERCONNECT HARNESS

PART NUMBER	LENGTH
0A-1192-1028	4'
0A-1192-1029	8'
0A-1192-1030	10'
0A-1192-1031	12'
0A-1192-1032	16'
0A-1192-1033	22'
0A-1192-1034	26'
0A-1192-1083	30'
0A-1192-1084	35'

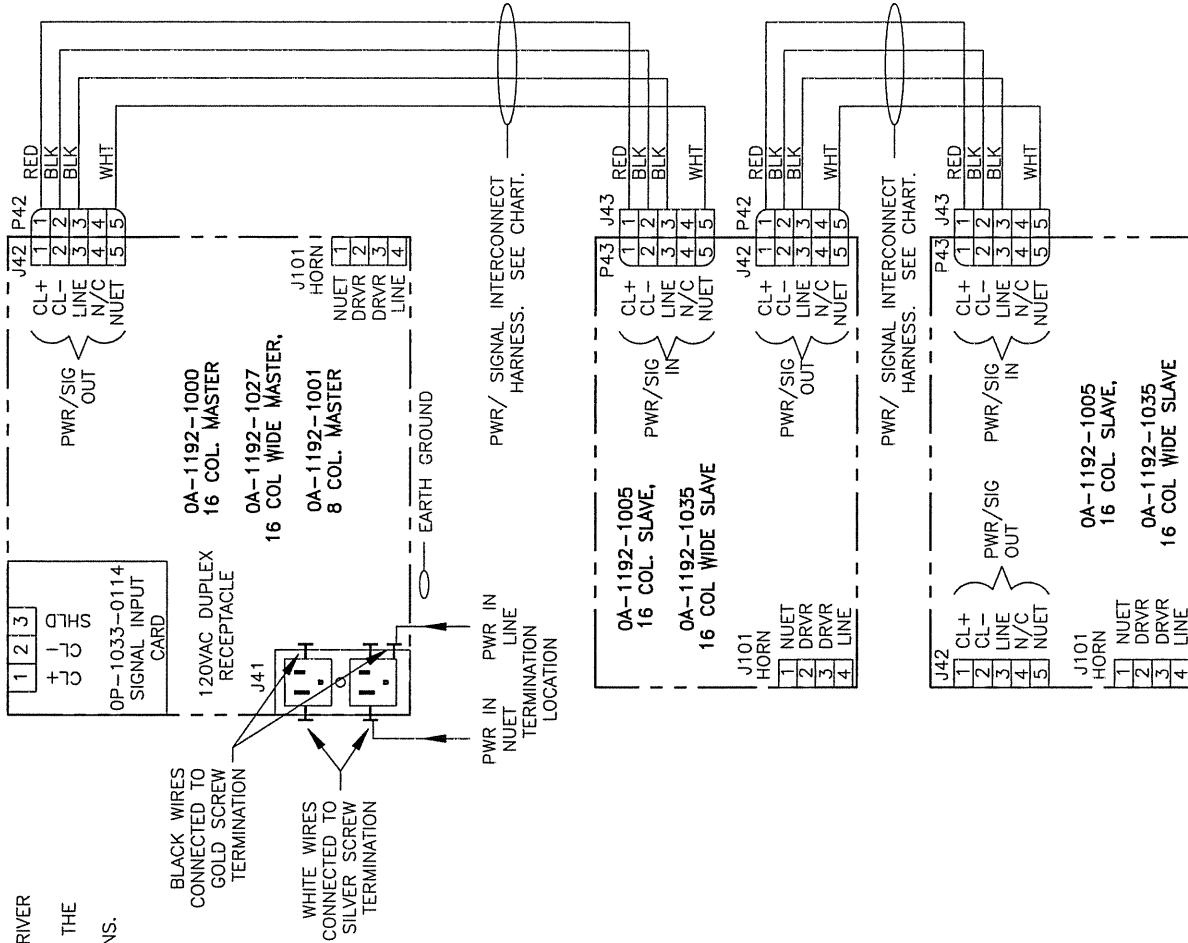

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: SCHEMATIC; GEN II OD LED, 3 DRVR DISPLAY

DES. BY: MILLER DRAWN BY: MILLER DATE: 17 DEC 01

REVISION APPR. BY: SCALE: 1=1

1192-R10A-159920

REV.	DATE	DESCRIPTION	BY	APPR.
01	22JAN02	ADDED WIRE CABLE COLORS	THS	

THIS SCHEMATIC REPRESENTS THE INTERCONNECT OF THE MASTER DRIVER TO OTHER DRIVERS/TNMC'S IN A MULTI DRIVER SCOREBOARD CONFIGURATION. SEE THE PRE-PRINT ASSEMBLY DRAWING AND/OR THE FINAL ASSEMBLY DRAWING FOR THE PART NUMBERS OF THE INTERCONNECT HARNESSES NEEDED AND INSTALLATION INSTRUCTIONS.

BLACK WIRES CONNECTED TO GOLD SCREW TERMINATION

WHITE WIRES CONNECTED TO SILVER SCREW TERMINATION

0A-1192-1000
16 COL. MASTER

0A-1192-1027
16 COL WIDE MASTER,

0A-1192-1001
8 COL. MASTER

0A-1192-1005
16 COL. SLAVE,

0A-1192-1035
16 COL WIDE SLAVE

0A-1192-1005
16 COL. SLAVE,

0A-1192-1035
16 COL WIDE SLAVE

0A-1192-1079
8x32 RED TNMC

0A-1192-1080
8x48 RED TNMC

0A-1192-1209
8x32 AMBER TNMC

0A-1192-1214
8x48 AMBER TNMC


0A-1192-1079
8x32 RED TNMC

0A-1192-1080
8x48 RED TNMC

0A-1192-1209
8x32 AMBER TNMC

0A-1192-1214
8x48 AMBER TNMC

PWR/SIGNAL INTERCONNECT HARNESSES BETWEEN SECTIONS. FOLLOW FINAL ASSY INSTRUCTIONS FOR ROUTING TO INTERCONNECT PANEL AND FOR ROUTING THROUGH NEXT SECTION.

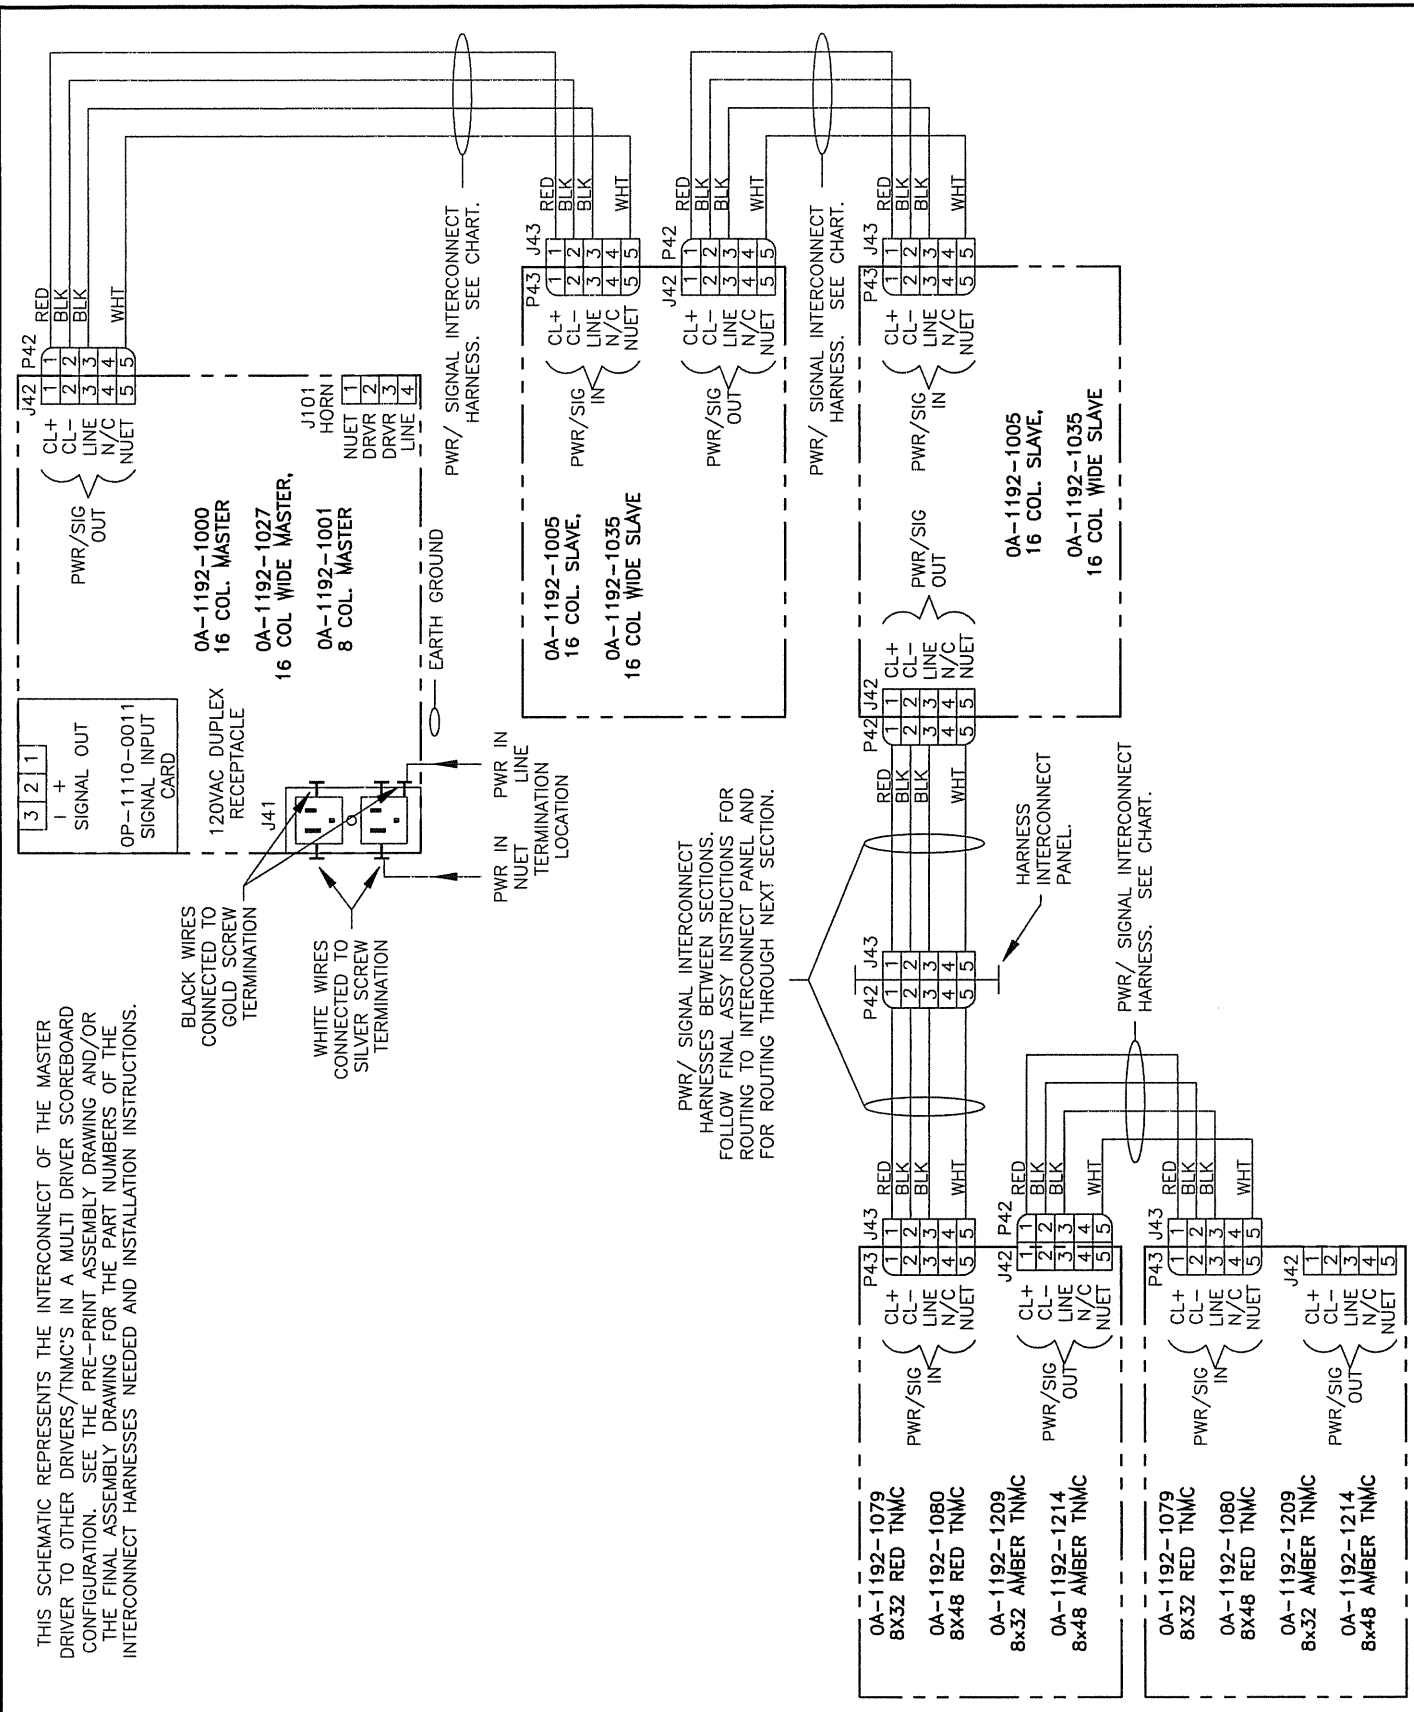


REV.	DATE	DESCRIPTION	BY	APPR.
02	20 MAY 02	REPLACED OP-1033-0114 WITH OP-1110-0011. REMOVED J101 AND ADDED AMBER TNMC.	THS	
01	22JAN02	ADDED WIRE CABLE COLORS	THS	

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: SCHEMATIC; GEN II, OD LED, 3 DRVR DISPLAY & TNMC			
DES. BY: MILLER	DRAWN BY: MILLER	DATE: 10 DEC 01	
REVISION	APPR. BY:	1192-R10A-159921	
	SCALE: 1=1		

PWR/ SIGNAL INTERCONNECT HARNESS BETWEEN SECTIONS.
FOLLOW FINAL ASSY INSTRUCTIONS FOR ROUTING AND
COILING FOR SHIPPING.


PWR/ SIGNAL
INTERCONNECT HARNESS.
SEE CHART.

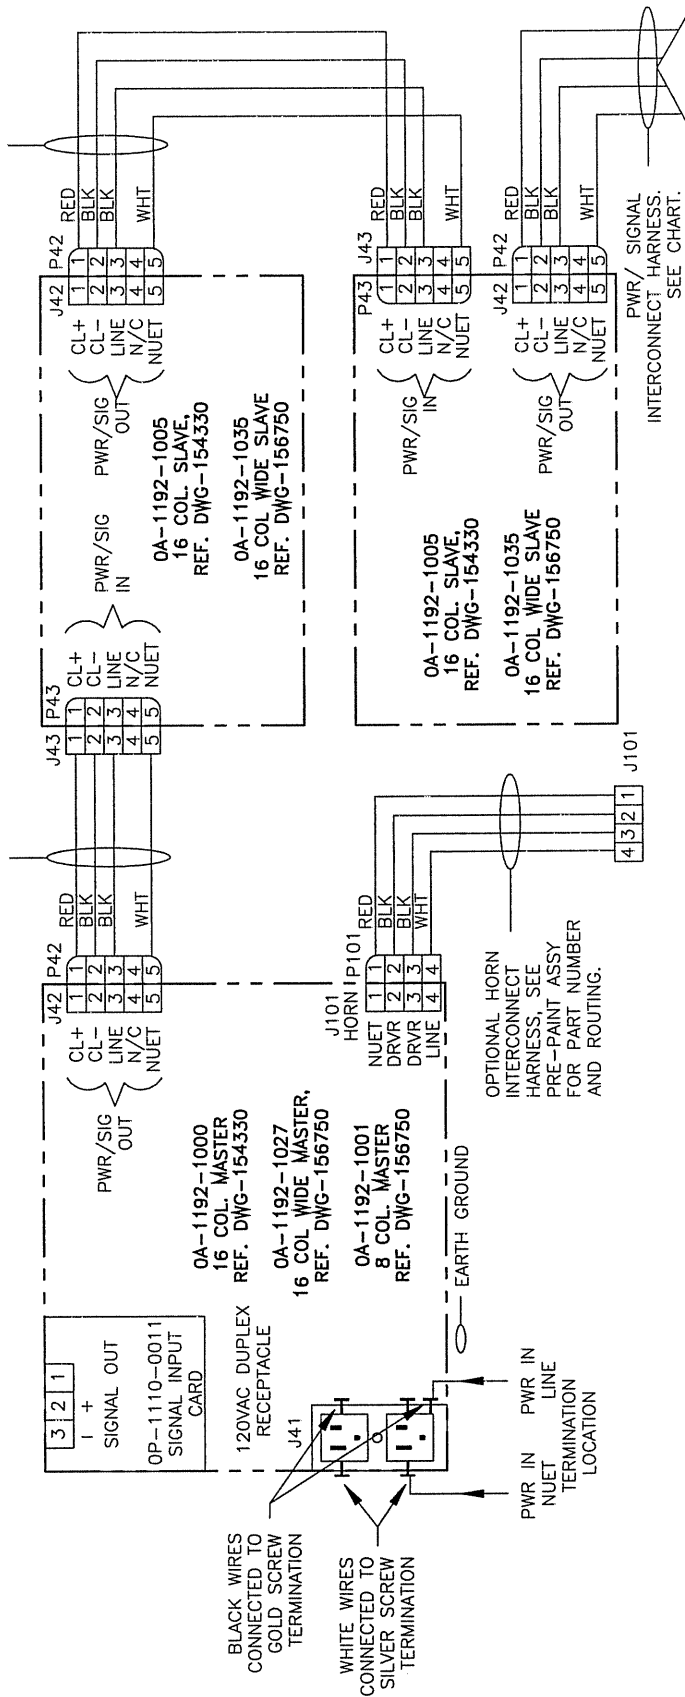

INTERCONNECT THE HARNESS TO EACH
DRIVER AS SHOWN. TOTAL NUMBER OF
DRIVER ASSEMBLY'S CAN NOT EXCEED
15AMPS.


THIS SCHEMATIC REPRESENTS THE INTERCONNECT OF THE MASTER DRIVER
TO OTHER DRIVERS/TNMC'S IN A MULTI DRIVER SCOREBOARD
CONFIGURATION. SEE THE PRE-PRINT ASSEMBLY DRAWING AND/OR THE
FINAL ASSEMBLY DRAWING FOR THE PART NUMBERS OF THE
INTERCONNECT HARNESSES NEEDED AND INSTALLATION INSTRUCTIONS.

PWR/ SIGNAL
INTERCONNECT HARNESS.
SEE CHART.

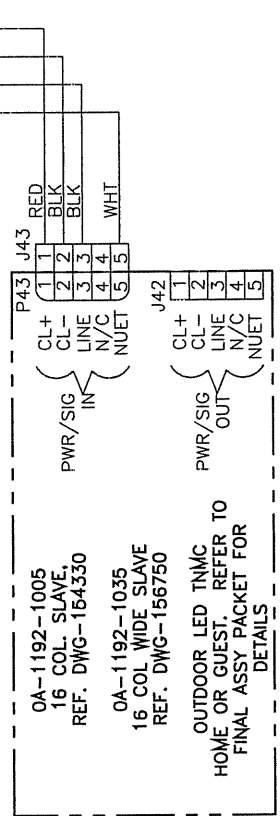

REV.	DATE	DESCRIPTION	BY	APPR.
03	20 MAY 02	REPLACED OP-1033-0114 WITH OP-1110-0011. ADDED P101 TO J101 FOR HORN ASSY.	THS	
02	29 MAR 02	REVISED DWG FROM 3 DRVR TO MULTIPLE DRVR, TO BE USED IN MORE SCBD DESIGNS.	MWM	
01	22JAN02	CORRECTED WIRE CONNECTION ADDED WIRE CABLE COLORS	THS	


DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ:	OUTDOOR LED SCOREBOARDS
TITLE:	SCHEMATIC; GEN II OD LED, MULTI DRVR, MULTI SECT
DES. BY:	MMILLER
DRAWN BY:	MMILLER
DATE:	17 DEC 01
REVISION	APPR. BY:
	SCALE: 1 = 1
1192-R10A-159923	

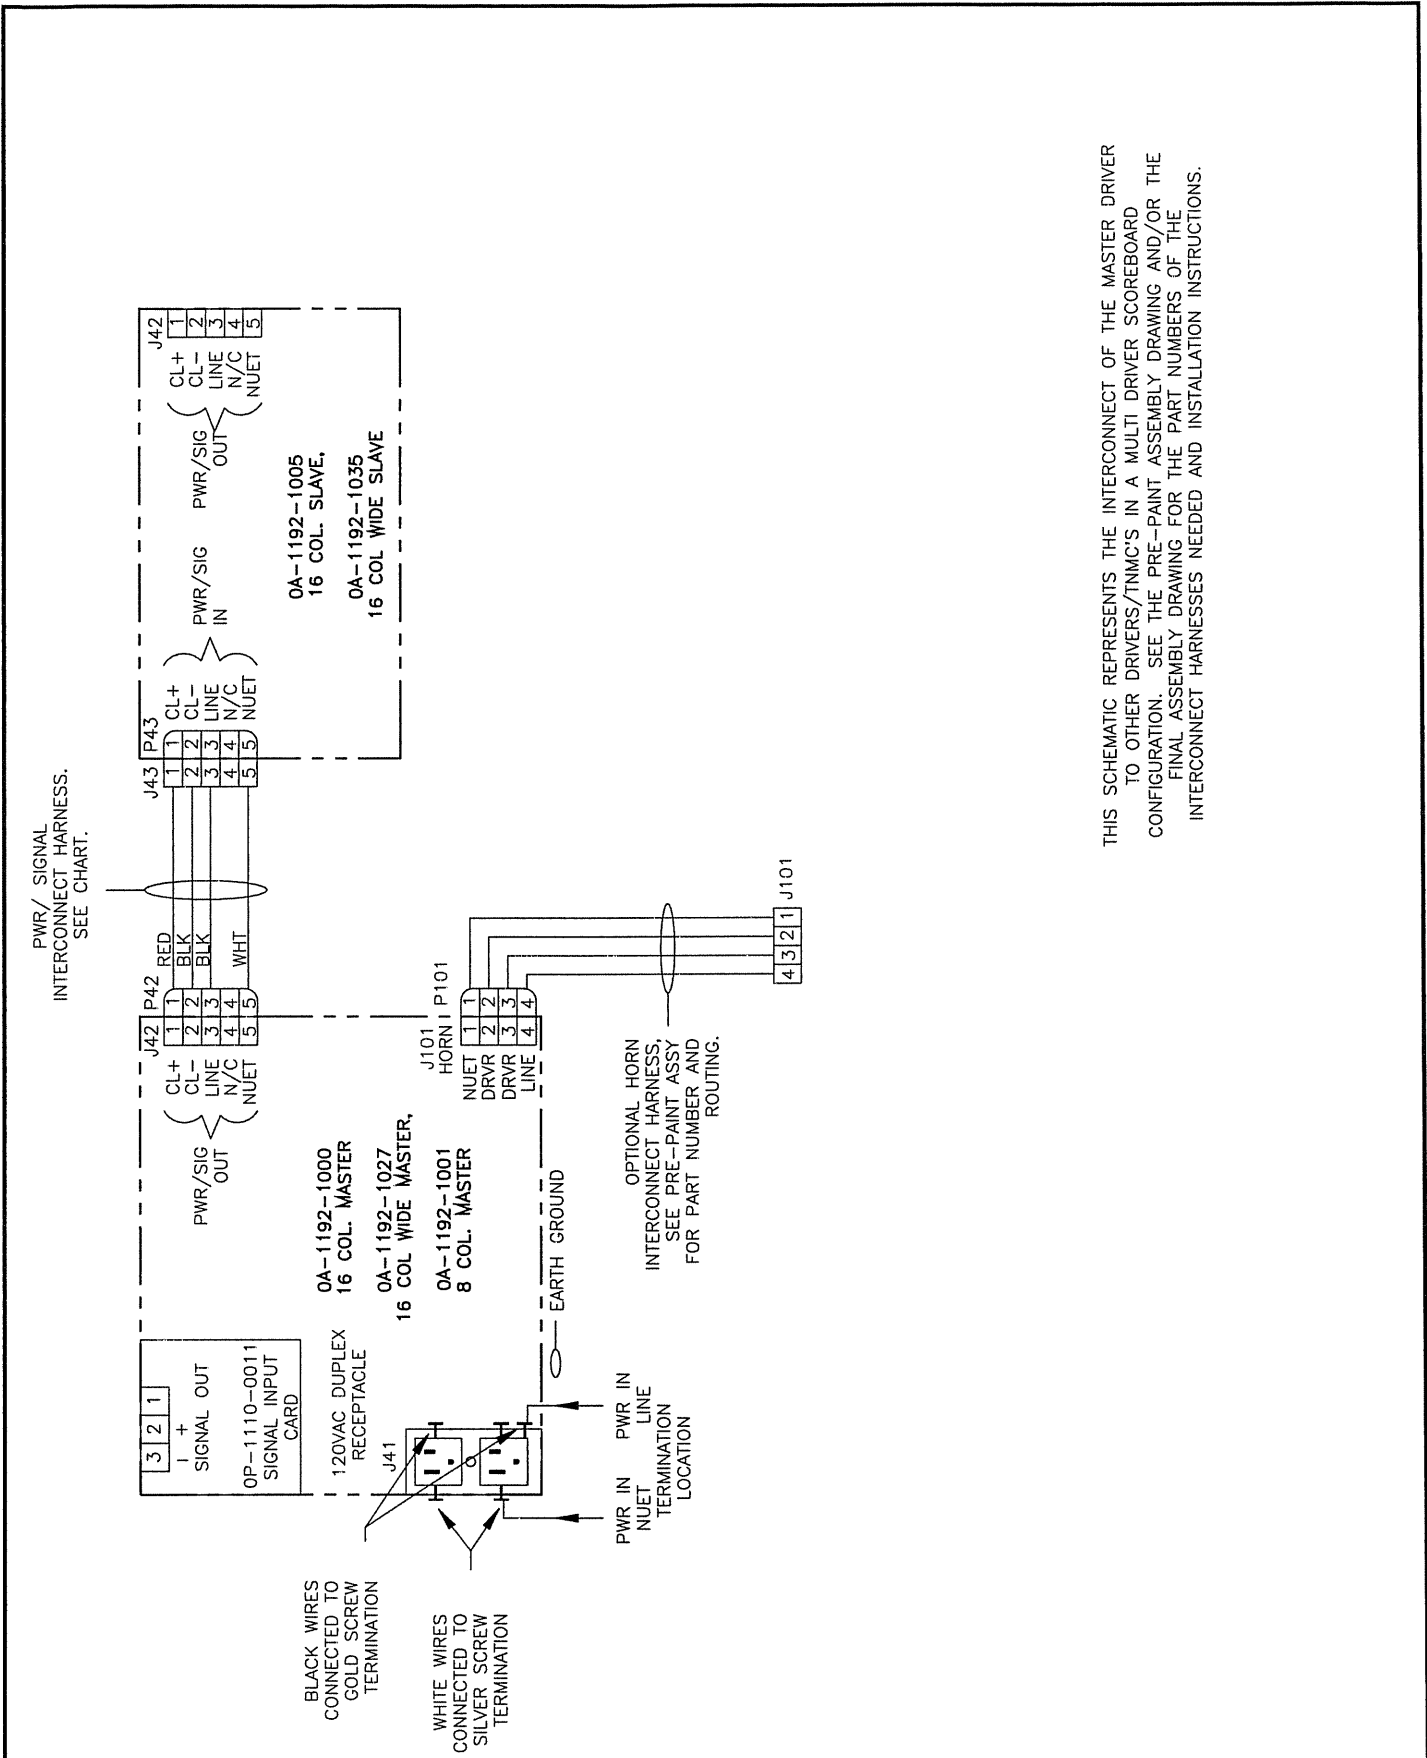

THIS SCHEMATIC REPRESENTS THE INTERCONNECT OF THE MASTER DRIVER TO OTHER DRIVERS/TNMC'S IN A MULTI DRIVER SCOREBOARD CONFIGURATION. SEE THE PRE-PAINT ASSEMBLY DRAWING AND/OR THE FINAL ASSEMBLY DRAWING FOR THE PART NUMBERS OF THE INTERCONNECT HARNESSES NEEDED AND INSTALLATION INSTRUCTIONS.

DAKTRONICS, INC. BROOKINGS, SD 57006				
02	17 MAY 02	REPLACED OP-1033-0114 WITH OP-1110-0011. REMOVED J101 HDRN JACK AND HARNESS TABLE.	THS	
01	22JAN02	ADDED WIRE CABLE COLORS CORRECTED WIRE CONNECTION	THS	
REV	DATE	DESCRIPTION	BY	APPR.
PROJ: OUTDOOR LED SCOREBOARDS		TITLE: SCHEMATIC; GEN II, OD LED, 2 DRVR DISPLAY		
DES. BY: MMILLER		DRAWN BY: MMILLER		DATE: 26 DEC 01
REVISION	APPR. BY:	1192-R10A-159999		
	SCALE: 1=1			

PWR/ SIGNAL INTERCONNECT HARNESS. SEE CHART.

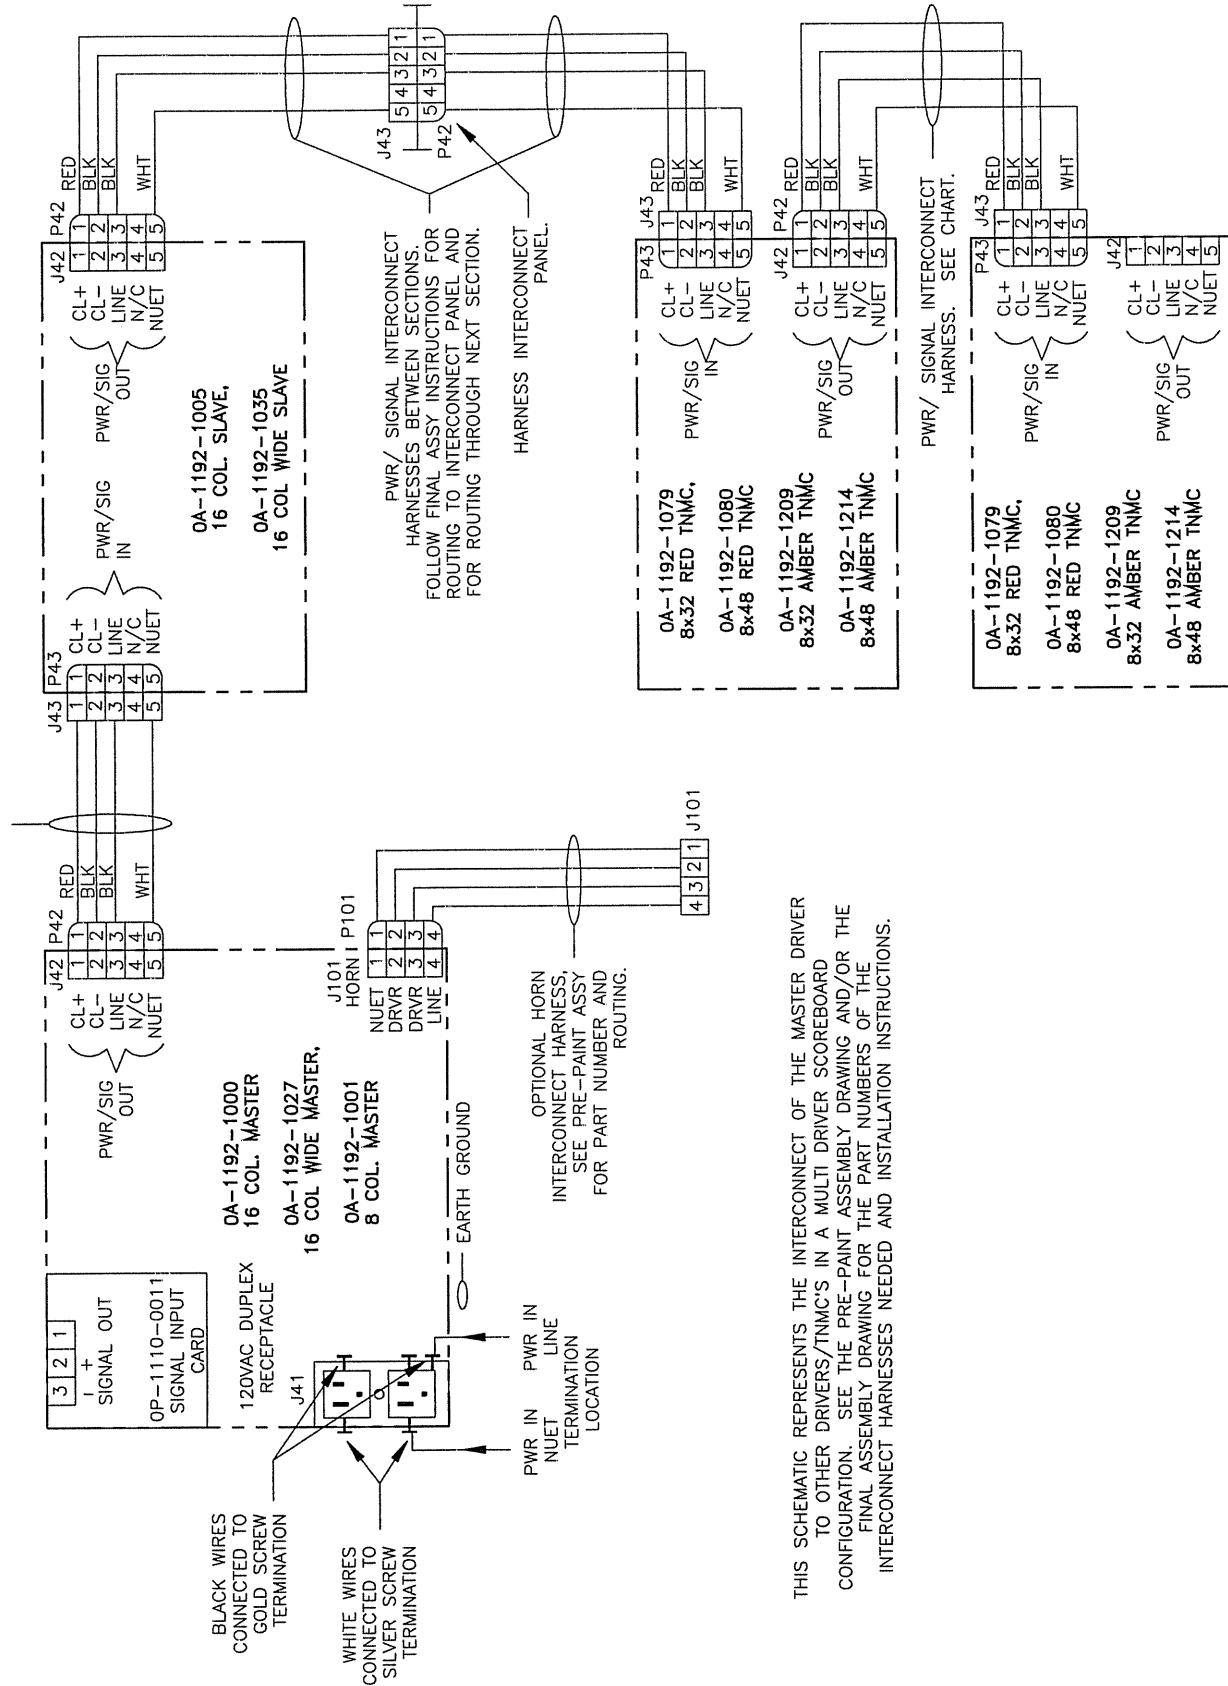


THIS SCHEMATIC REPRESENTS THE INTERCONNECT OF THE MASTER DRIVER TO OTHER DRIVERS/TNMC'S IN A MULTI DRIVER SCOREBOARD CONFIGURATION. SEE THE PRE-PAINT ASSEMBLY DRAWING AND/OR THE FINAL ASSEMBLY DRAWING FOR THE PART NUMBERS OF THE INTERCONNECT HARNESSES NEEDED AND INSTALLATION INSTRUCTIONS.

REV.	DATE	DESCRIPTION	BY	APPR.
02	17 MAY 02	ADDED AMBER TNMC'S AND REMOVED J101 HORN, REPLACED OP-1033-0114 WITH OP-1110-0011 (SIGNAL CARD).	THS	
01	21JAN02	ADDED WIRE CABLE COLORS CORRECTED A WIRE CONNECTION EDITED TEXT FOR TNMC DRIVERS	THS	

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ:	OUTDOOR LED SCOREBOARDS		
TITLE:	SCHEMATIC; GEN II, OD LED, 2 DRVR DISPLAY & TNMC		
DES. BY:	MMILLER	DRAWN BY:	MMILLER
			DATE: 26 DEC 01
REVISION	APPR. BY:	1192-R10A-160547	
	SCALE: 1 = 1		

FB-1424-11

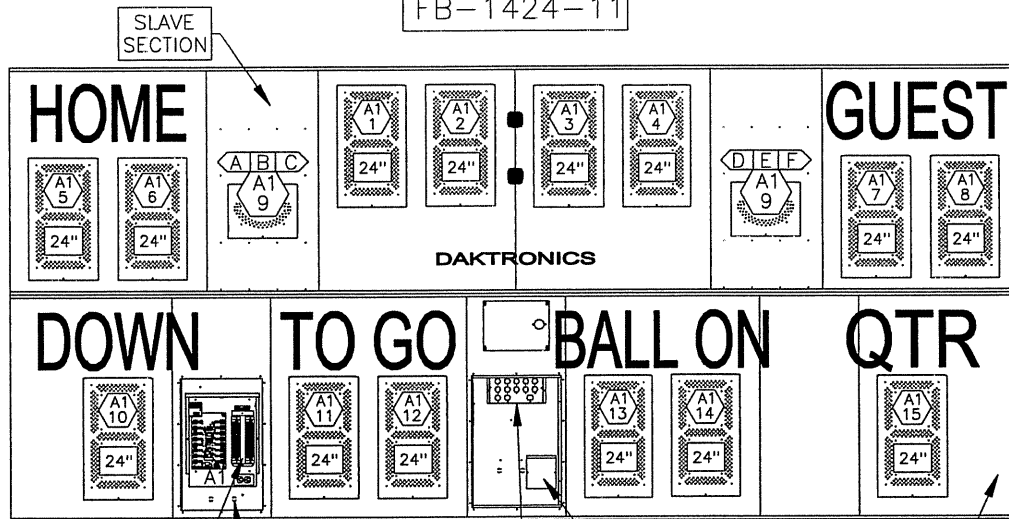

ENCLOSED 16 COLUMN DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW COMPONENT DETAIL).


CONNECTOR PANEL FOR DIGIT HARNESS

HORN (OPTIONAL)

MASTER SECTION

KNOCKOUT FOR 1/2" CONDUIT

FB-1424-11 W/ 832-10 LED TNMC

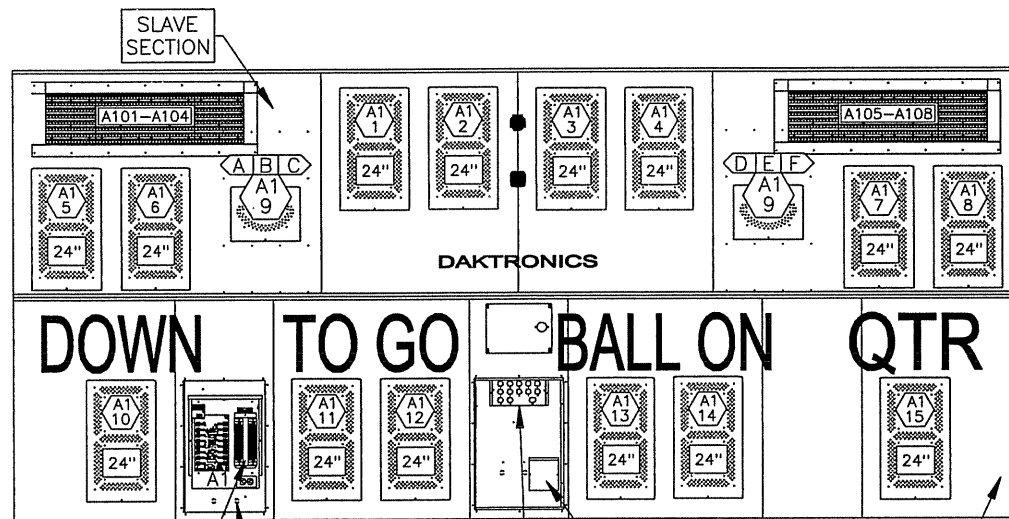

ENCLOSED 16 COLUMN DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW COMPONENT DETAIL).

CONNECTOR PANEL FOR DIGIT HARNESS

HORN (OPTIONAL)

MASTER SECTION

KNOCKOUT FOR 1/2" CONDUIT

= LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

= SEGMENT DESIGNATIONS

= DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; FB-1424-11

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN


DATE: 26DEC01

REV.	DATE	DESCRIPTION	BY	APPR.
01	29JAN03	CORRECTED INDICATOR DIGIT DESIGNATION	MCOPL	

REVISION	APPR. BY:
	1=40

1192-E07A-160605

FB-1524-11

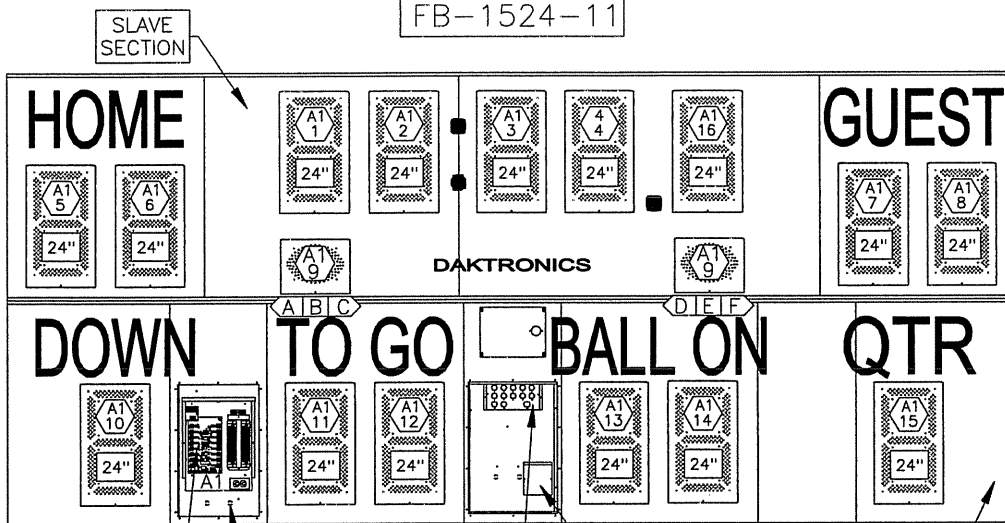

ENCLOSED 16 COLUMN DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW COMPONENT DETAIL).


CONNECTOR PANEL FOR DIGIT HARNESS

HORN (OPTIONAL)

MASTER SECTION

KNOCKOUT FOR 1/2" CONDUIT

FB-1524-11 W/ 832-10 LED TNMC

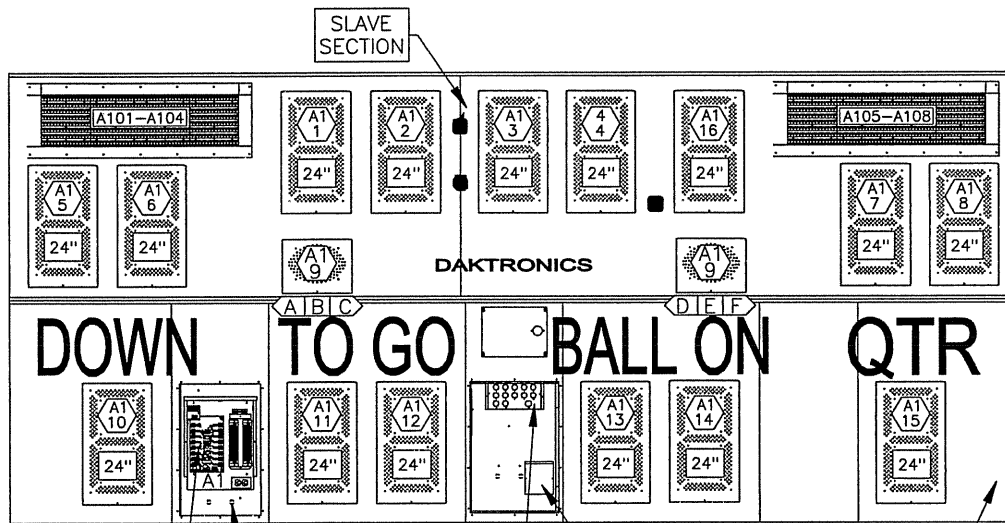

ENCLOSED 16 COLUMN DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW COMPONENT DETAIL).

CONNECTOR PANEL FOR DIGIT HARNESS

HORN (OPTIONAL)

MASTER SECTION

KNOCKOUT FOR 1/2" CONDUIT

= LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

= SEGMENT DESIGNATIONS

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; FB-1524-11


DES. BY: MCOPLAN DRAWN BY: MCOPLAN DATE: 27DEC01

REVISION APPR. BY:

SCALE: 1=40

1192-E07A-160628

REV.	DATE	DESCRIPTION	BY	APPR.
01	29JAN03	CORRECTED INDICATOR DIGIT DESIGNATION	MCOPL	

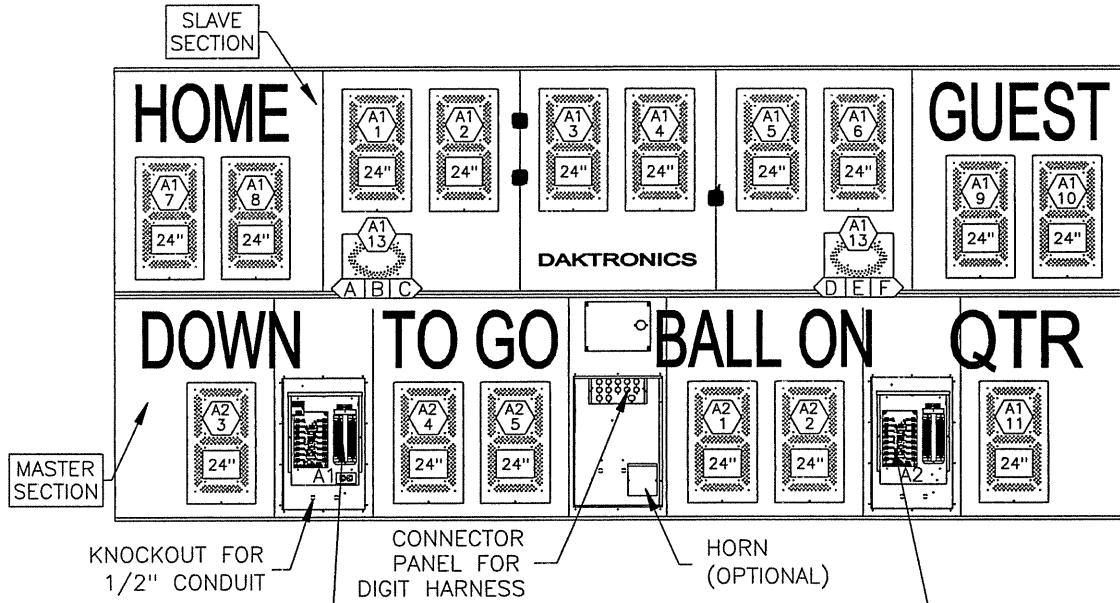

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

A1 = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

A B C = SEGMENT DESIGNATIONS

24" = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.


01	29JAN03	CORRECTED INDICATOR DIGIT DESIGNATION	MCOPL	
REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-1624-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 27DEC01			
REVISION	APPR. BY:	1192-E07A-160644	
	SCALE: 1=40		

MODELS FB-2001 & FB-2004

DISTANCE TO BOTTOM OF SCOREBOARD (FT)	DOES SCOREBOARD HAVE ATTACHED AD PANEL?	DESIGN WIND VELOCITY (MPH)		
		70	80	100
A				
10	NO	W8x24 3.0 X 7.2	W12x26 3.0 X 7.9	W10x33 3.0 X 9.4
	YES	W10x33 3.0 X 8.5	W10x39 3.0 X 9.4	W14x43 3.0 X 11.1
12	NO	W12x26 3.0 X 7.5	W12x30 3.0 X 8.3	W14x38 3.0 X 9.8
	YES	W14x38 3.0 X 8.8	W12x40 3.0 X 9.7	W12x50 3.0 X 11.5
14	NO	W12x30 3.0 X 7.8	W10x33 3.0 X 8.6	W12x40 3.0 X 10.2
	YES	W12x40 3.0 X 9.1	W12x45 3.0 X 10.0	W12x58 3.0 X 11.9
16	NO	W10x33 3.0 X 8.1	W10x39 3.0 X 9.0	W12x45 3.0 X 10.6
	YES	W14x43 3.0 X 9.4	W12x50 3.0 X 10.4	W14x61 3.0 X 12.2
18	NO	W10x39 3.0 X 8.4	W12x40 3.0 X 9.2	W12x50 3.0 X 10.9
	YES	W14x48 3.0 X 9.7	W12x53 3.0 X 10.7	W16x67 3.0 X 12.6
20	NO	W12x45 3.0 X 9.4	W12x50 3.0 X 10.3	W14x61 3.0 X 12.2
	YES	W12x53 3.0 X 10.0	W14x61 3.0 X 11.0	W14x74 3.0 X 13.0

W6x12 ← RECOMMENDED BEAM SECTION FOR MOUNTING SCOREBOARD
 2.00 X 4.25 ← RECOMMENDED FOOTINGS IN FEET (DIAMETER X DEPTH)

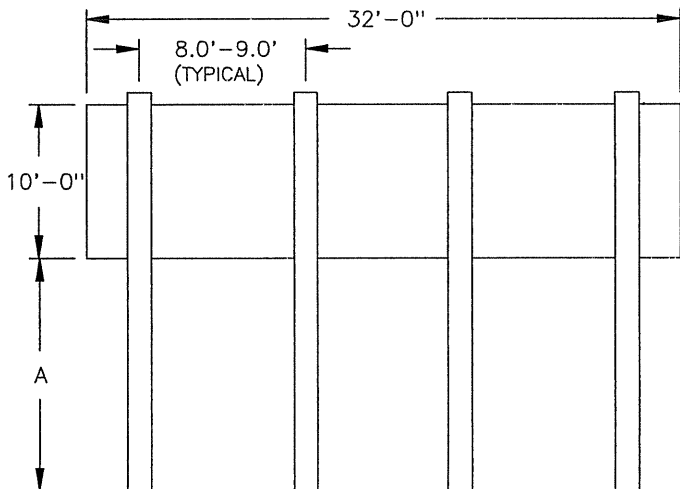

REAR VIEW

NOTE:
 RECOMMENDATIONS FOR A DISPLAY WITH AN ATTACHED AD PANEL WERE CALCULATED USING A 48" TALL AD PANEL.

UBC 97 CODE USED WITH SOIL CLASS 3.

INFORMATION GIVEN IS FOR ESTIMATING PURPOSES ONLY. COLUMNS AND FOOTINGS MUST BE DESIGNED BY A STATE LICENCED ENGINEER. DAKTRONICS DOES NOT ASSUME ANY LIABILITY FOR ANY INSTALLATIONS DERIVED FROM THIS INFORMATION OR DESIGNED AND INSTALLED BY OTHERS.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR SCOREBOARDS



TITLE: BEAM AND FOOTING RECOMMENDATIONS, FB-200X

DES. BY: MCOPL/RNEYEN DRAWN BY: MCOPLAN DATE: 04JAN02

REV.	DATE	DESCRIPTION	BY	APPR.
01	07 APR 03	ADDED 10'-0" DIMENSION TO LEFT OF SCOREBOARD.	JJS	

REVISION	APPR. BY:
	NONE

1091-R08A-160931

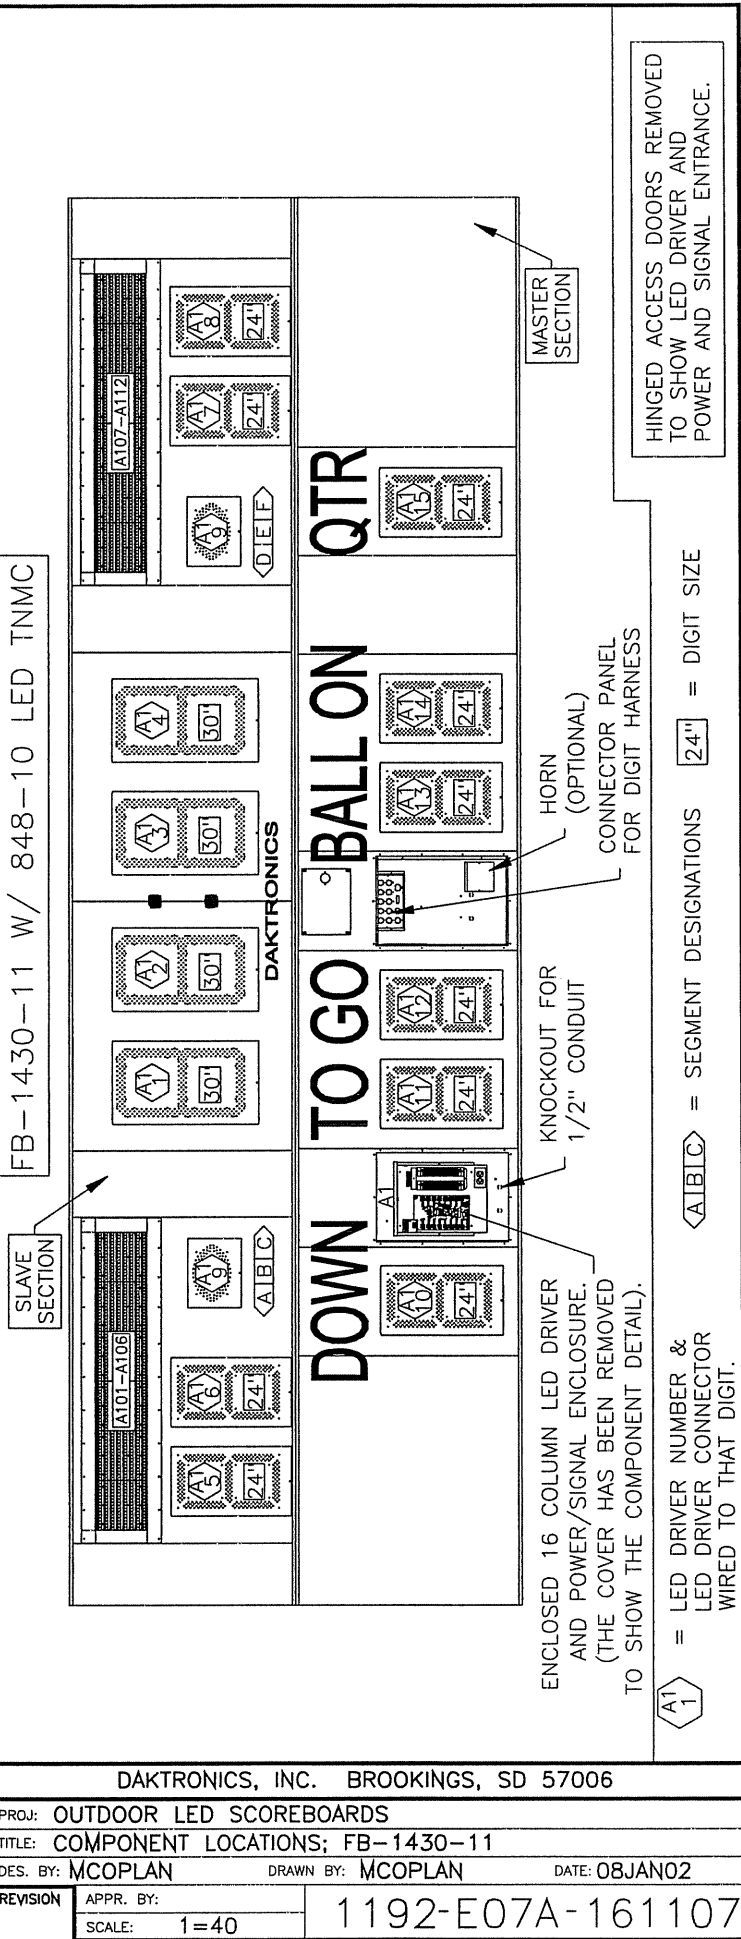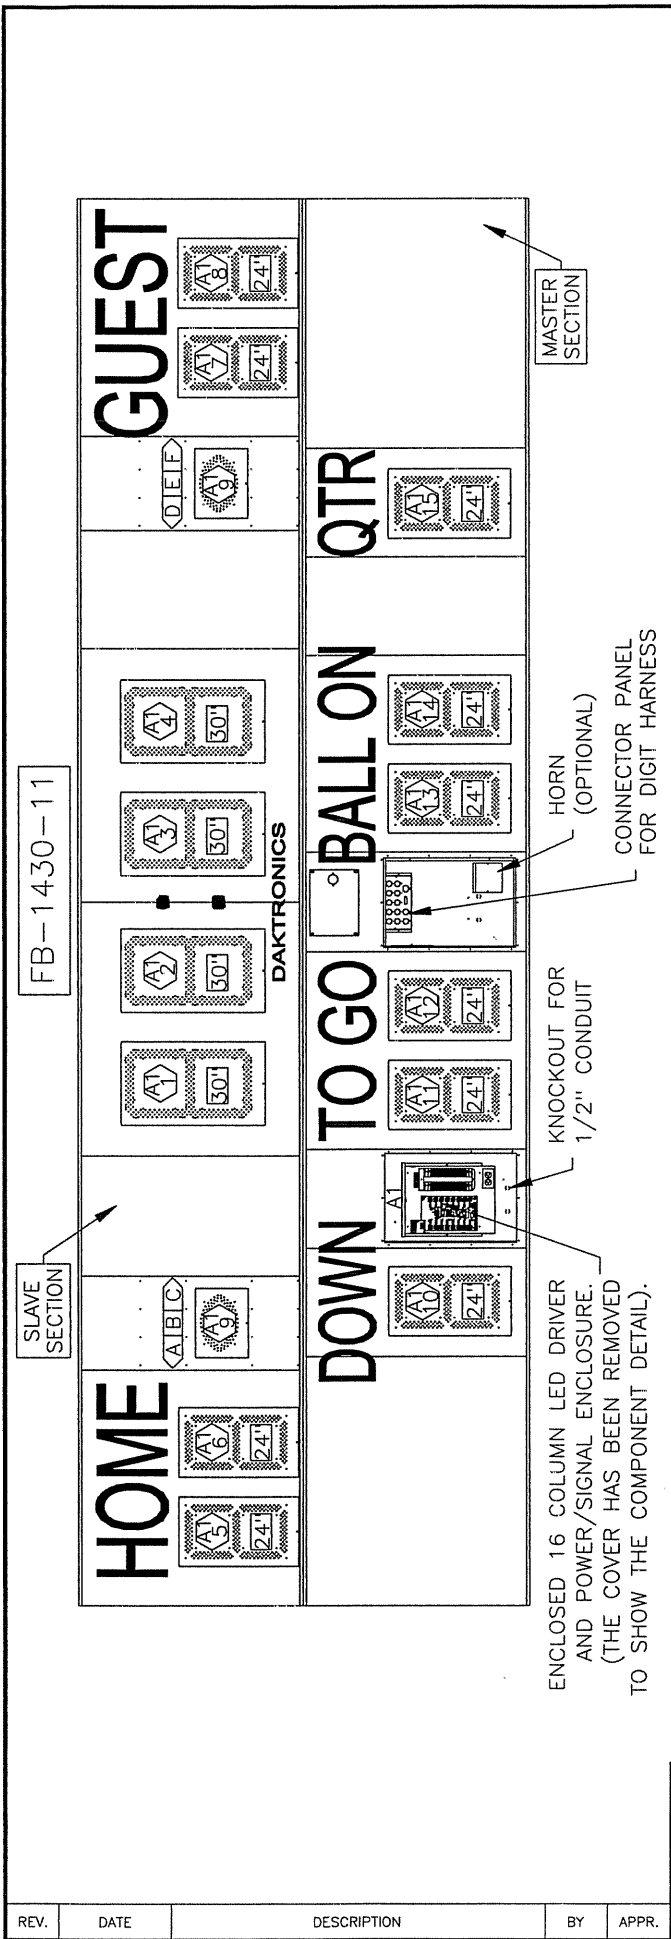

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.


(A1) = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
 (A1B1C) = SEGMENT DESIGNATIONS [24"] = DIGIT SIZE

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ:	OUTDOOR LED SCOREBOARDS		
TITLE:	COMPONENT LOCATIONS; FB-1430-11		
DES. BY:	MCOPLAN	DRAWN BY:	MCOPLAN
			DATE: 08JAN02
REVISION	APPR. BY:	1192-E07A-161107	
	SCALE:	1=40	

REV.	DATE	DESCRIPTION	BY	APPR.

FB-1530-11

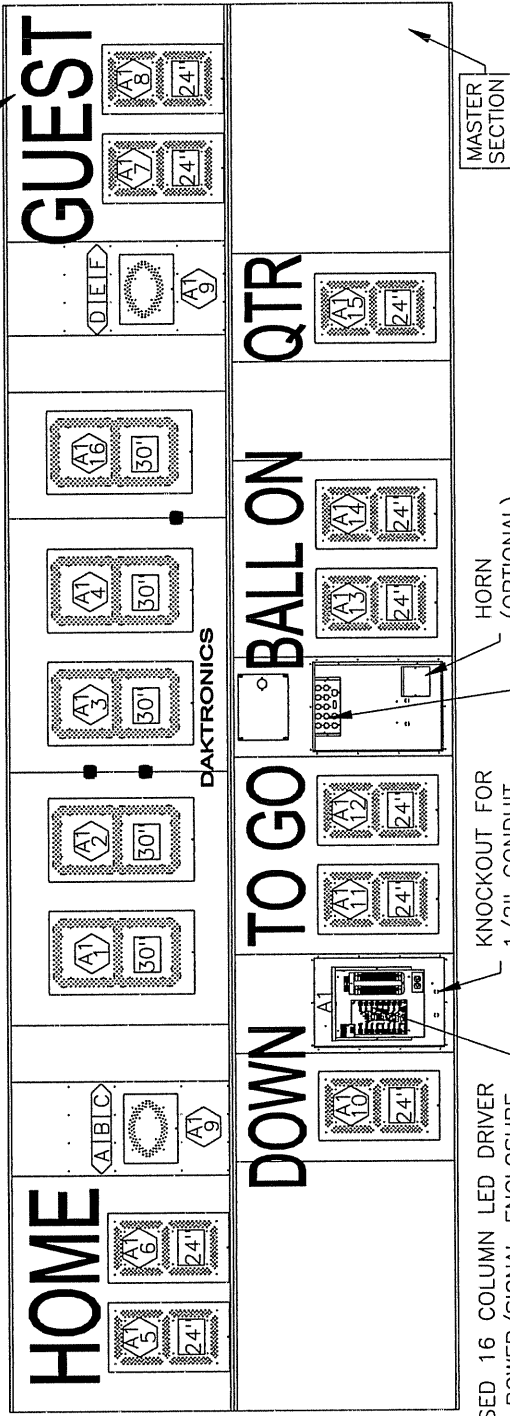


ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

KNOCKOUT FOR 1/2" CONDUIT

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

FB-1530-11 W/ 848-10 LED TNMC

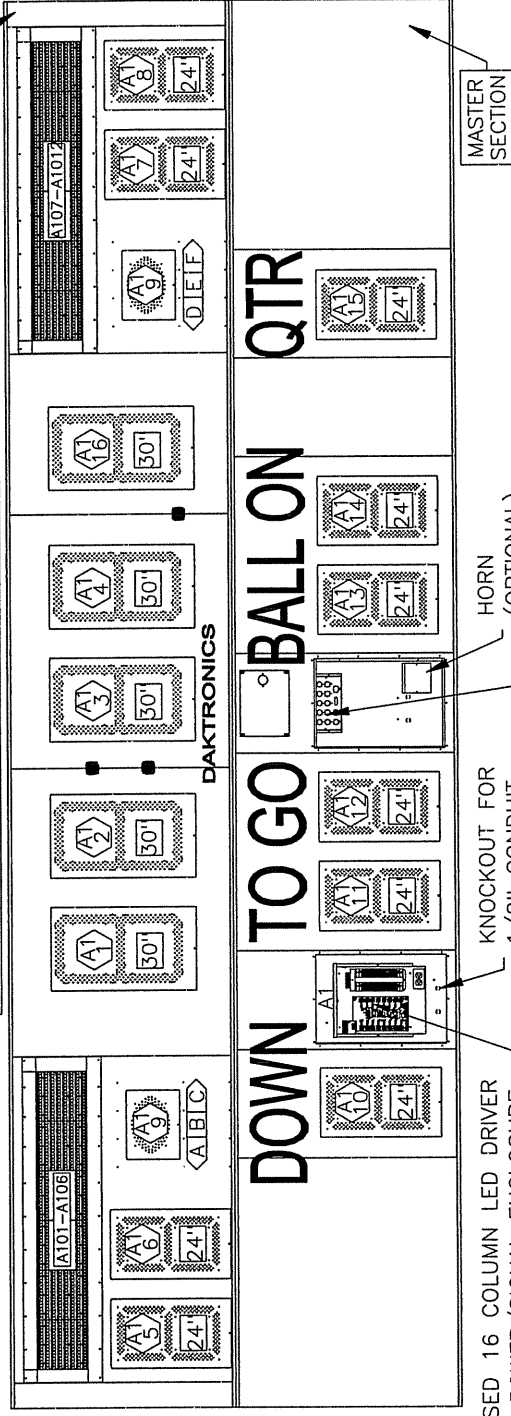

ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

KNOCKOUT FOR 1/2" CONDUIT

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.

24" = DIGIT SIZE

◁A1B▷ = SEGMENT DESIGNATIONS

◁A1 1▷ = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; FB-1530-11

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN

DATE: 08JAN02



REVISION

APPR. BY:

SCALE: 1 = 40


1192-E07A-161113

REV.	DATE	DESCRIPTION	BY	APPR.

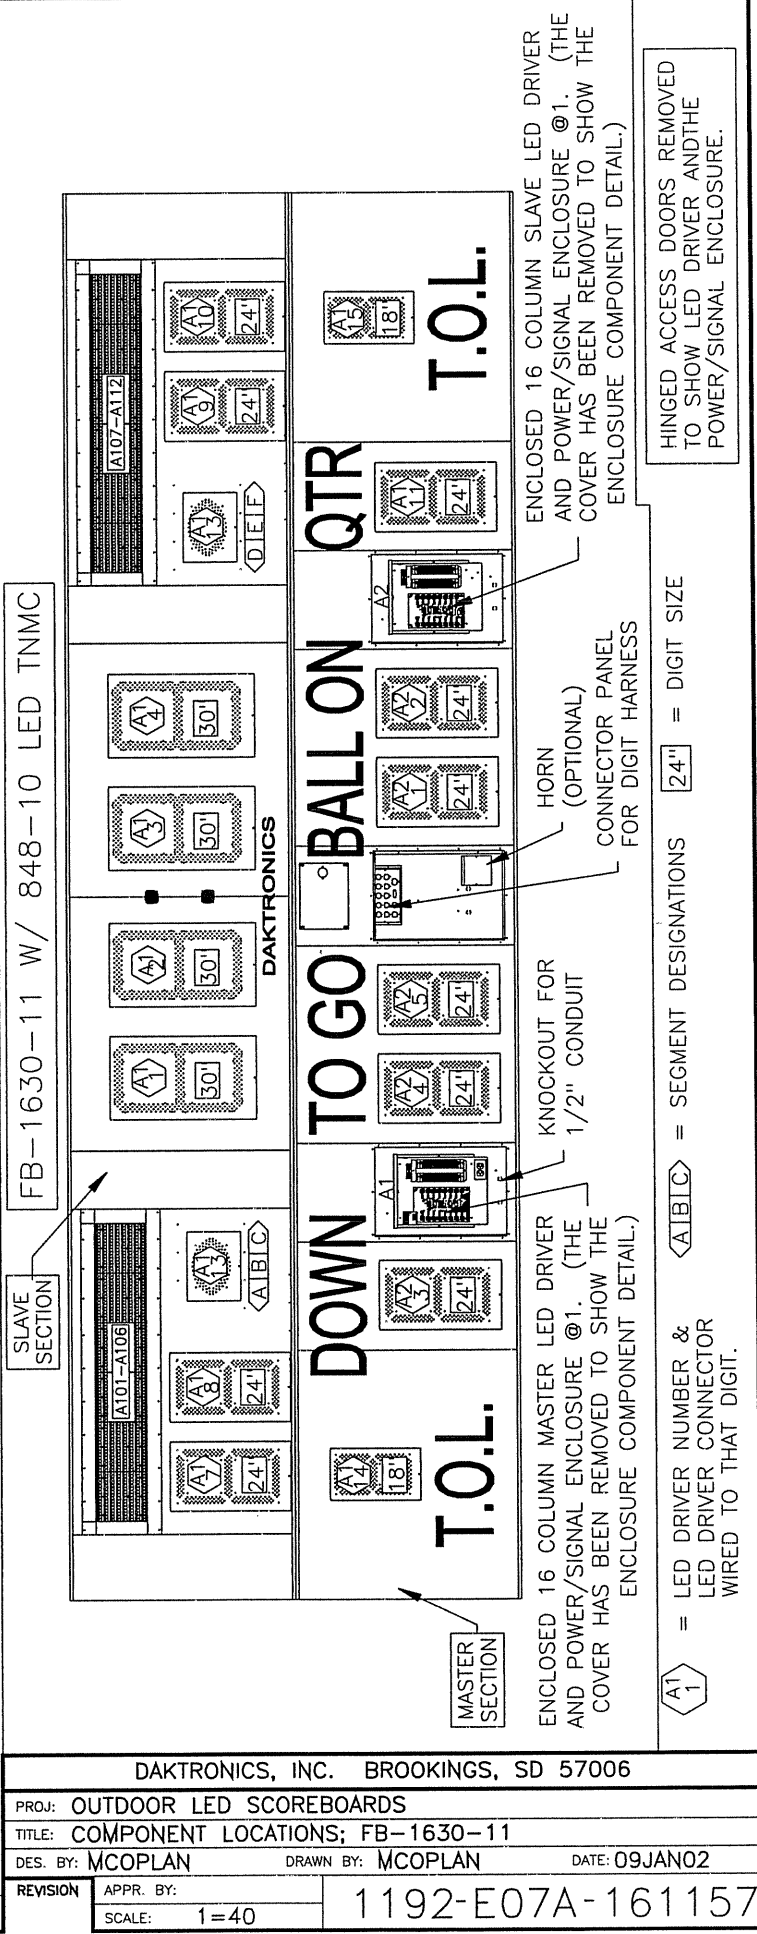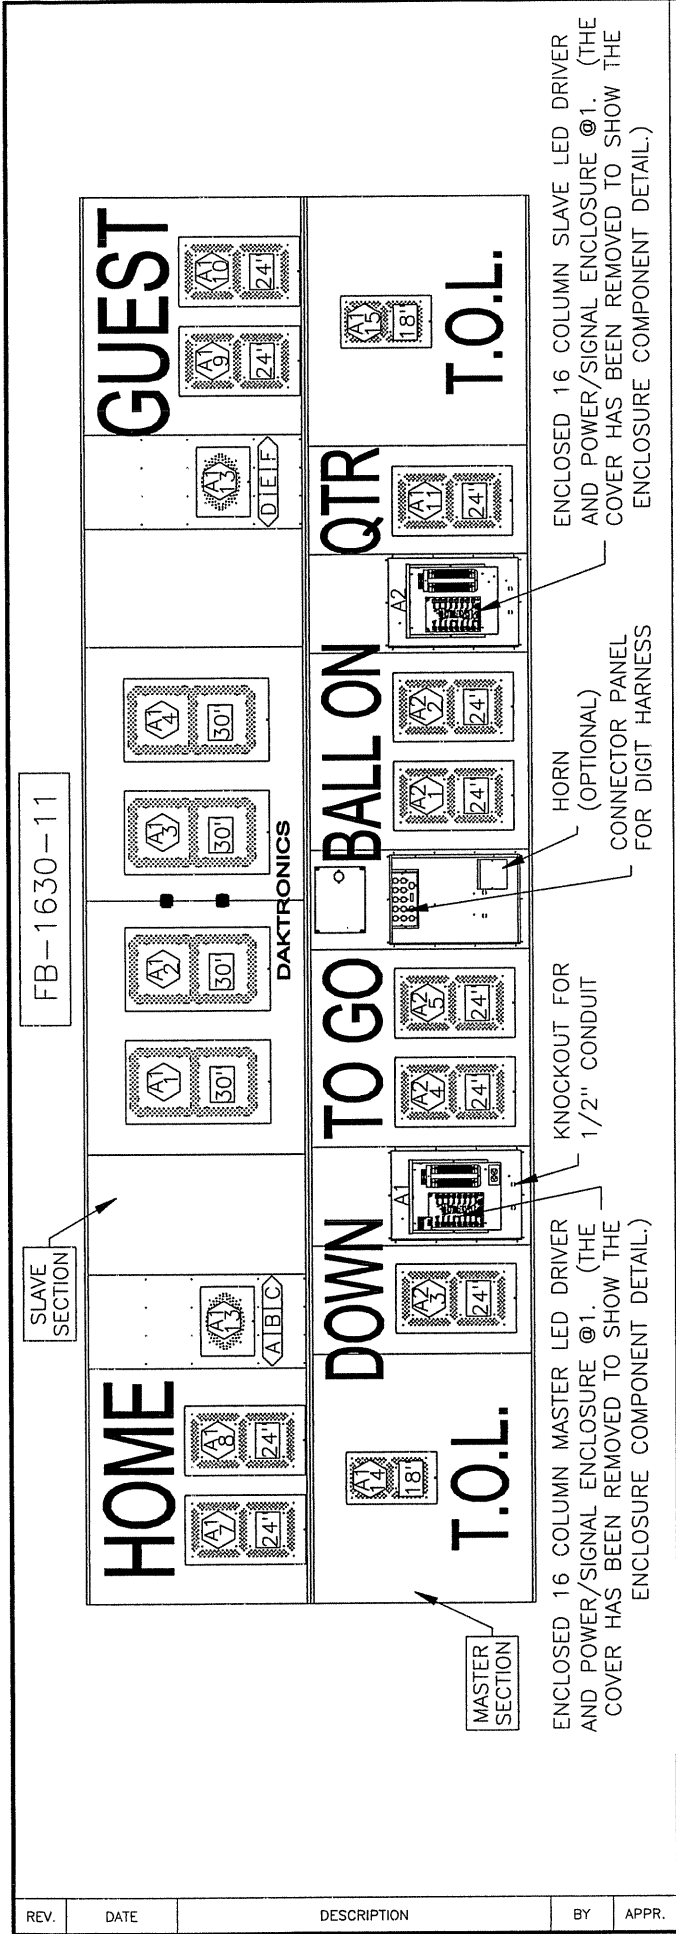


DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-1630-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 09JAN02			
REVISION	APPR. BY:	1192-E07A-161157	
	SCALE: 1 = 40		

REV.	DATE	DESCRIPTION	BY	APPR.

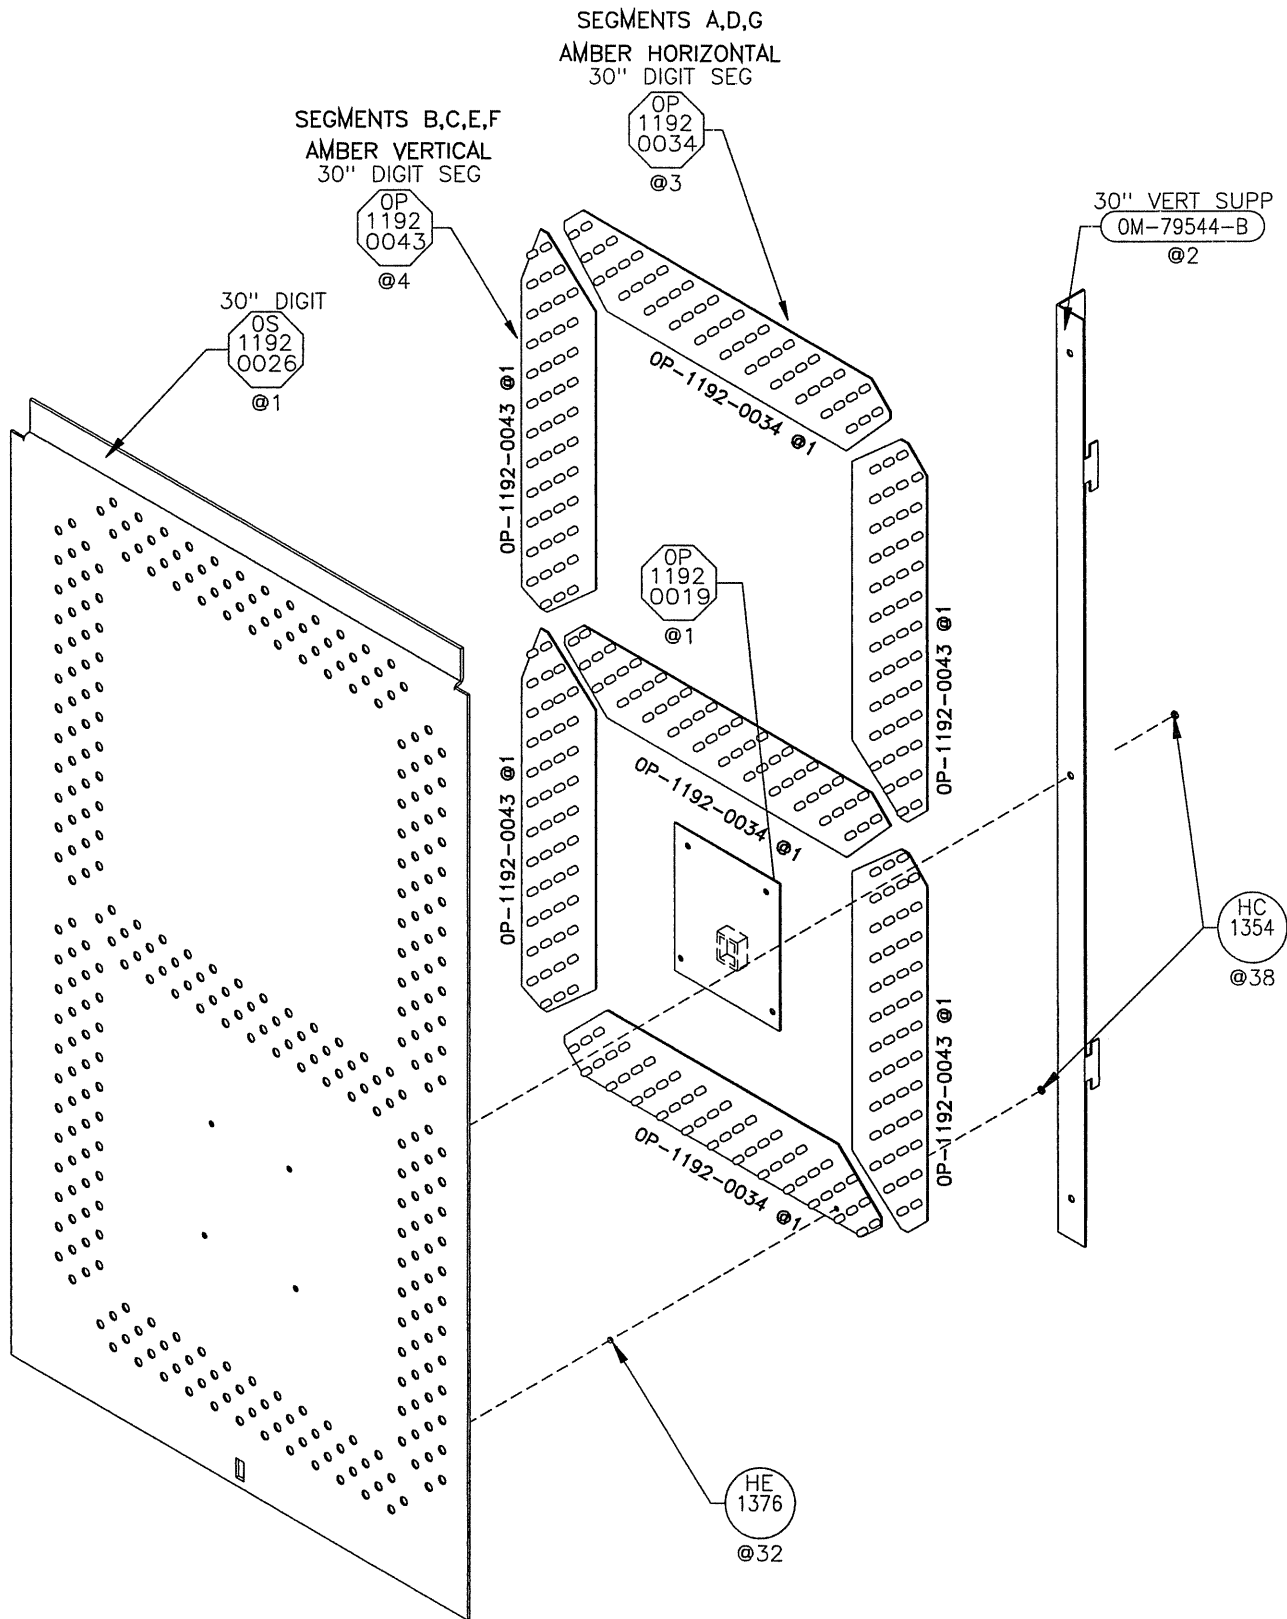

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED DIGIT SCOREBOARDS			
TITLE: 30" AMBER LED DIGIT ASSEMBLY			
DES. BY: EBRAVEK		DRAWN BY: EBRAVEK	DATE: 11 JAN 02
REVISION	APPR. BY:	1192-E10A-161254	
	SCALE: 1=6		

01	28AUG02	REPLACED HE-1357 WITH HE-1376	MCOPL	
REV.	DATE	DESCRIPTION	BY	APPR.

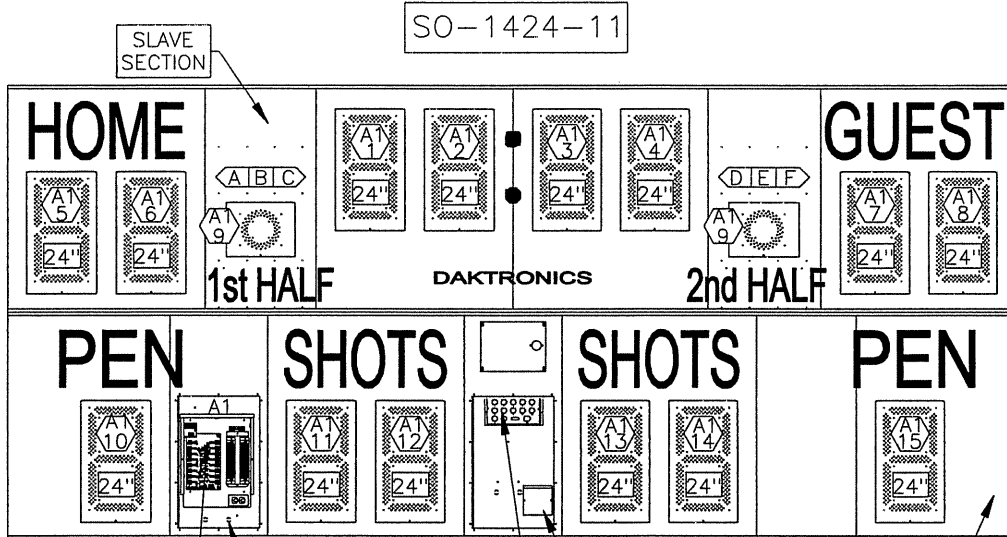


ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

KNOCKOUT FOR 1/2" CONDUIT

HORN (OPTIONAL)
CONNECTOR PANEL FOR DIGIT HARNESS

MASTER SECTION

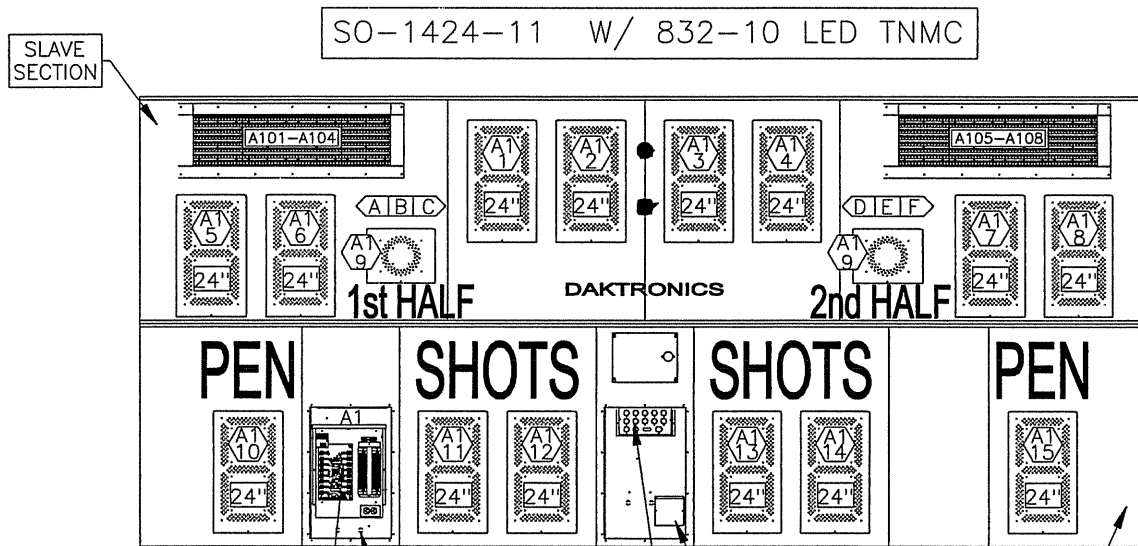

ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

KNOCKOUT FOR 1/2" CONDUIT

HORN (OPTIONAL)
CONNECTOR PANEL FOR DIGIT HARNESS

MASTER SECTION



= LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.



= SEGMENT DESIGNATIONS



= DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; SO-1424-11

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN

DATE: 11JAN02



REVISION

APPR. BY:

SCALE: 1=40

1192-E07A-161277

REV.	DATE	DESCRIPTION	BY	APPR.

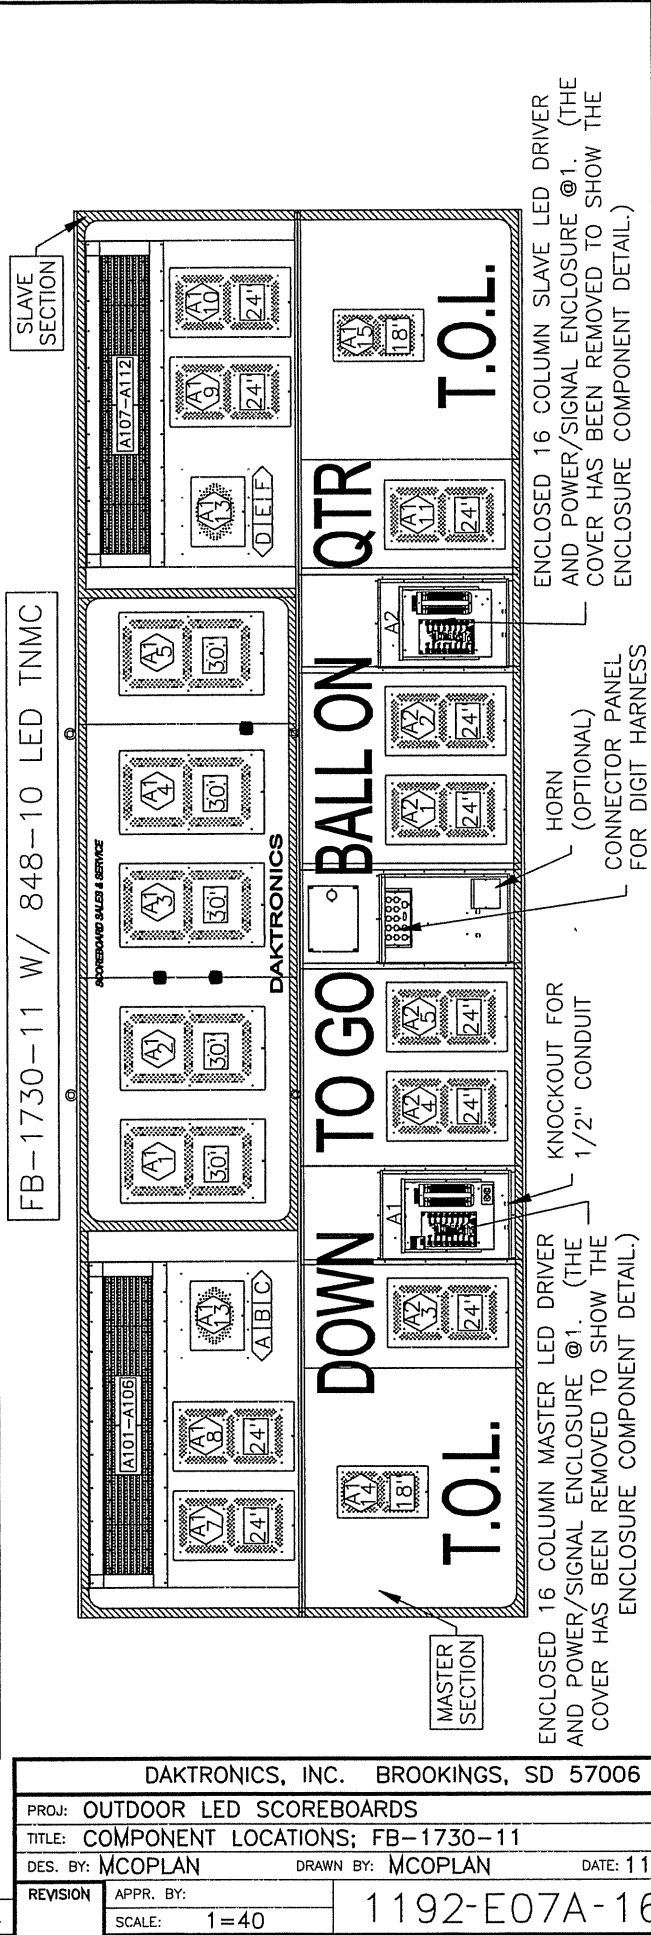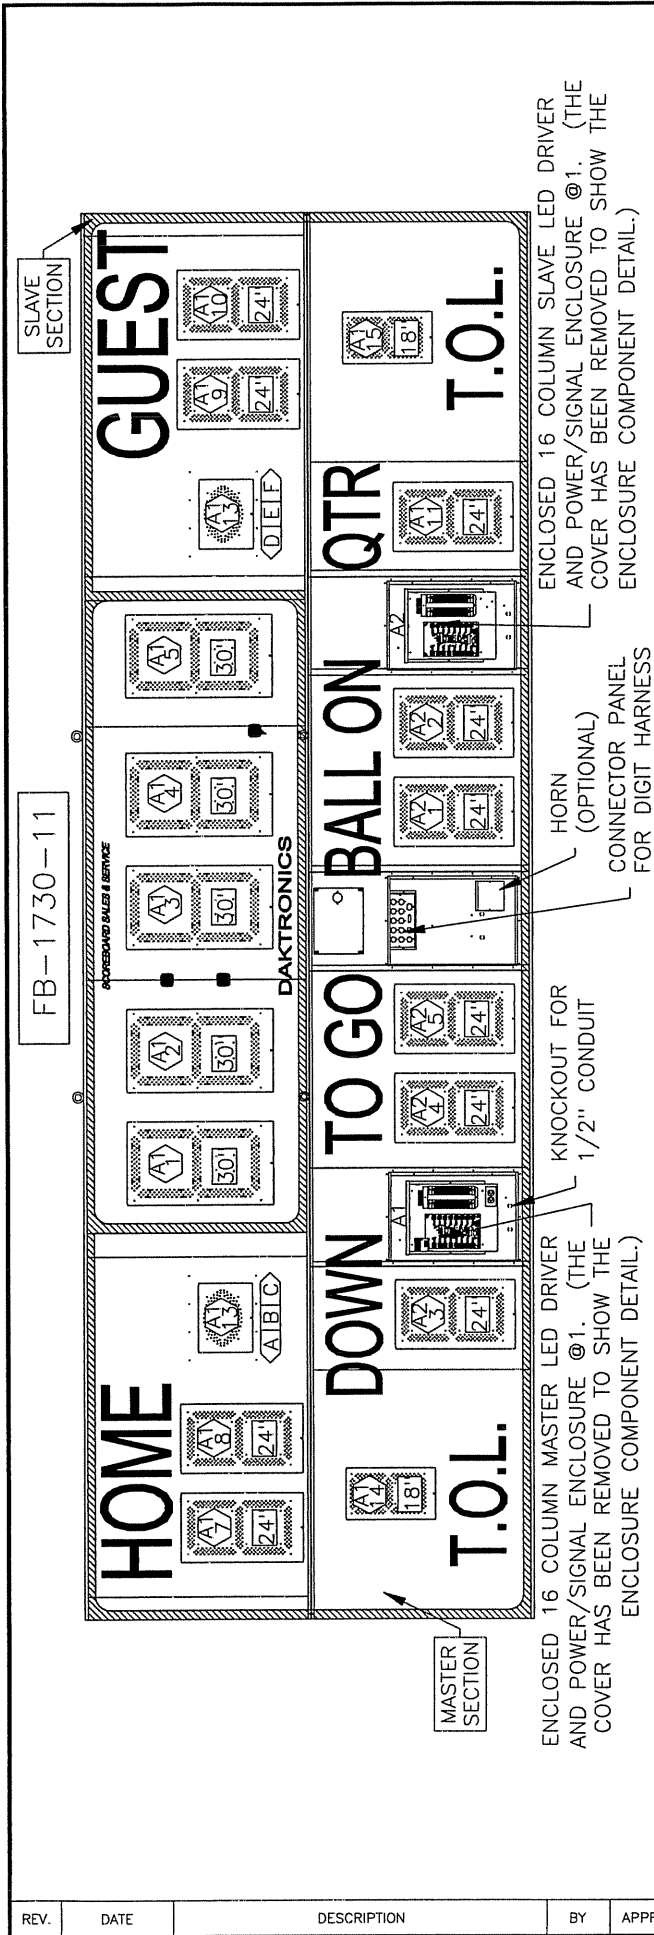

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)



ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-1730-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 11JAN02			
REVISION	APPR. BY:	1192-E07A-161281	
SCALE:	1=40		

FB-1730-11

FB-1730-11 W/ 848-10 LED TNMC

REV.	DATE	DESCRIPTION	BY	APPR.

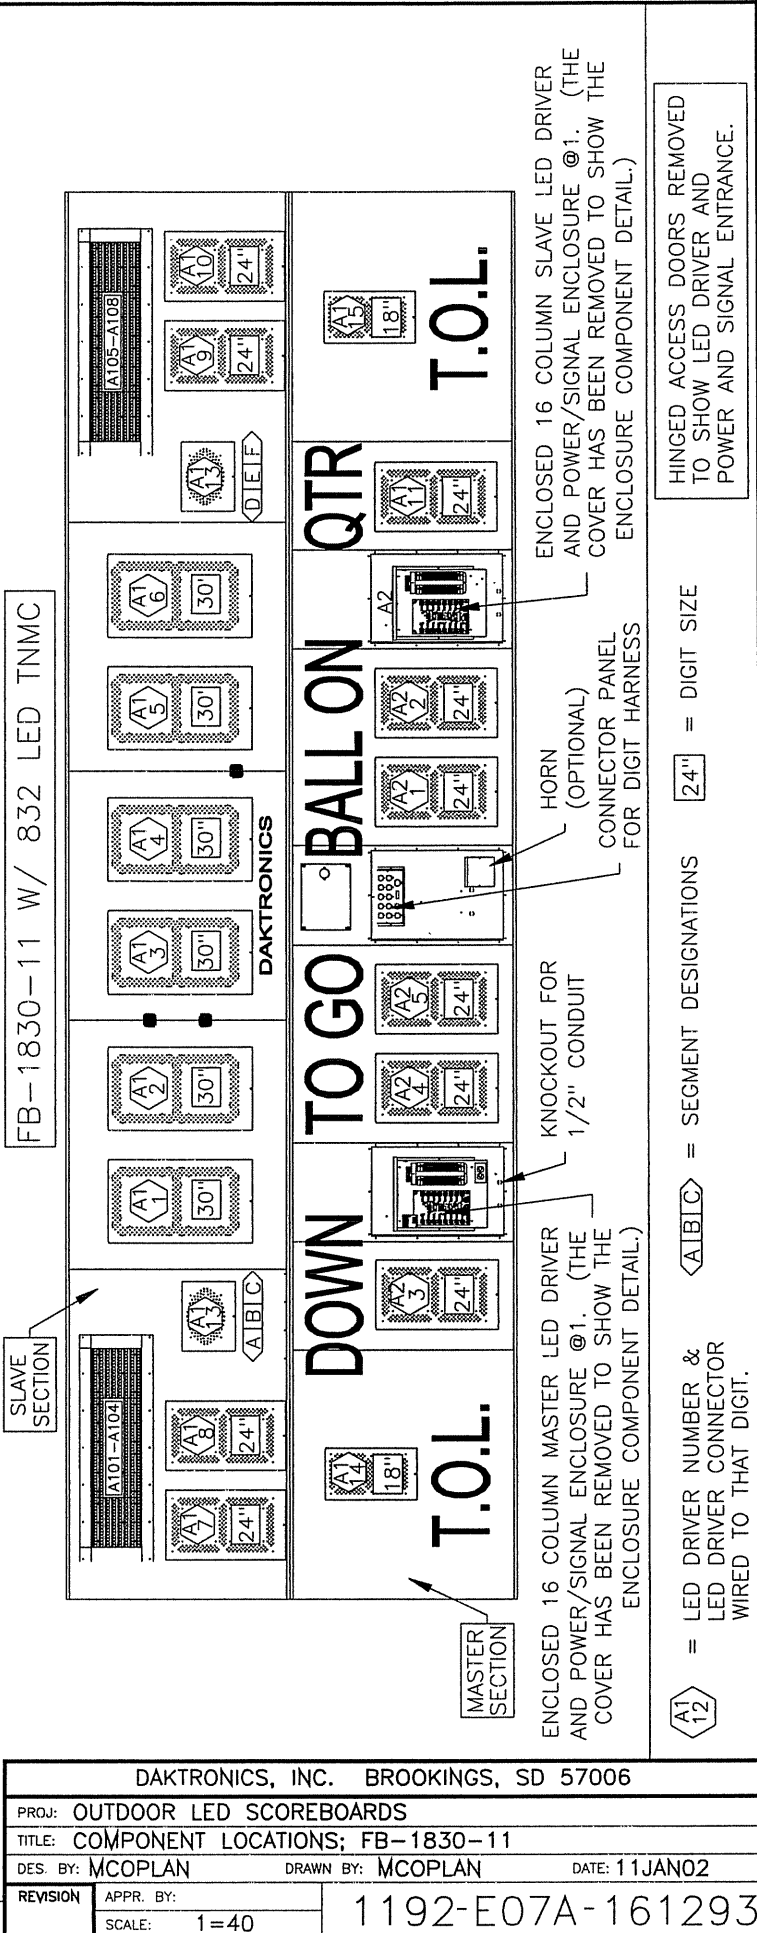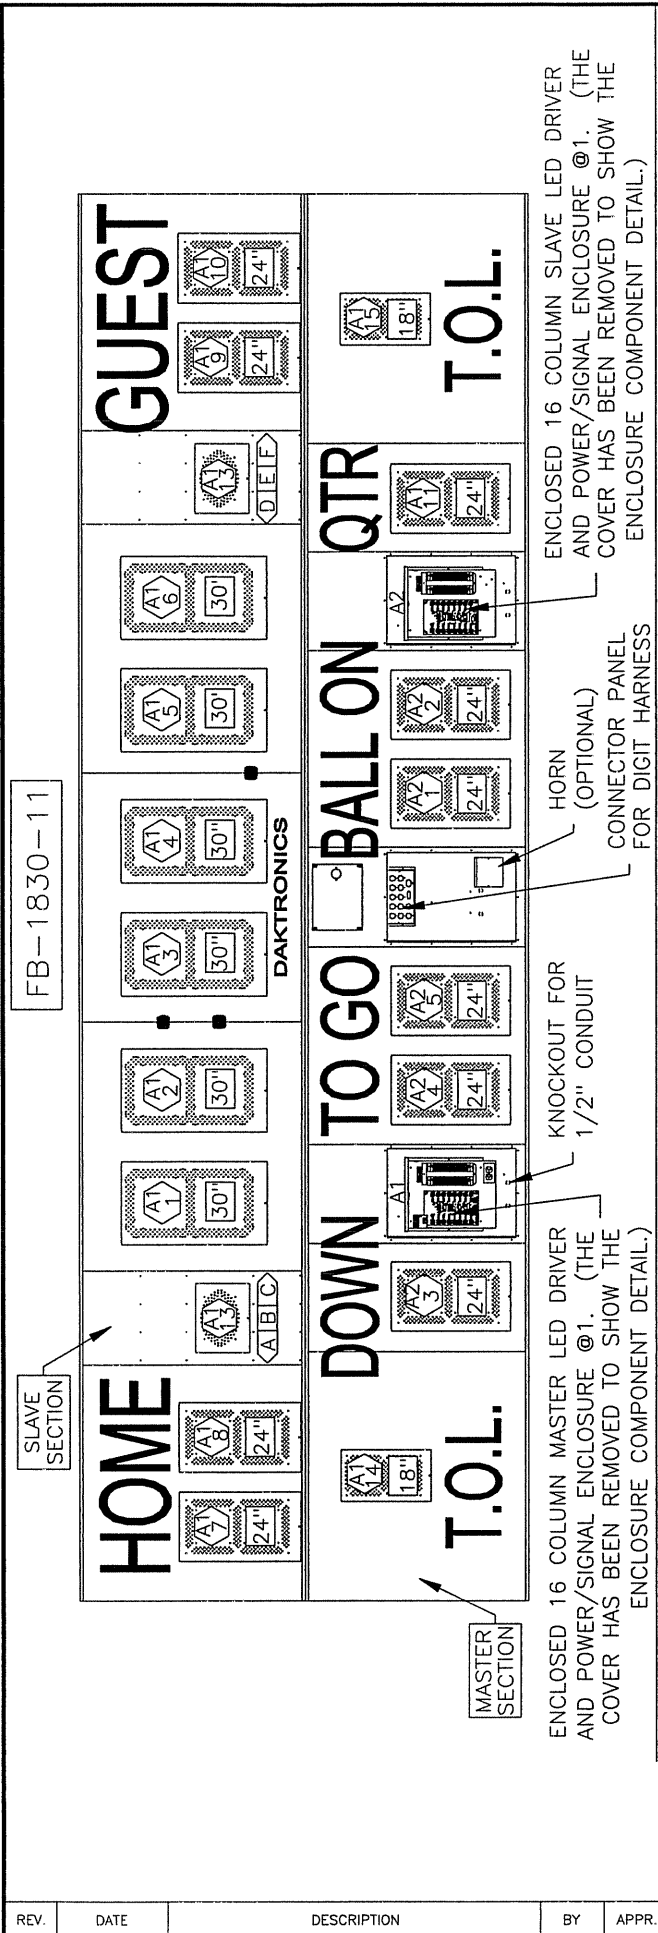

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.


LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

◁A1B1C1▷ = SEGMENT DESIGNATIONS 24" = DIGIT SIZE

◁A112▷ = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-1830-11			
DES. BY: MCOPLAN	DRAWN BY: MCOPLAN	DATE: 11JAN02	
REVISION	APPR. BY:	1192-E07A-161293	
SCALE: 1=40			

REV.	DATE	DESCRIPTION	BY	APPR.


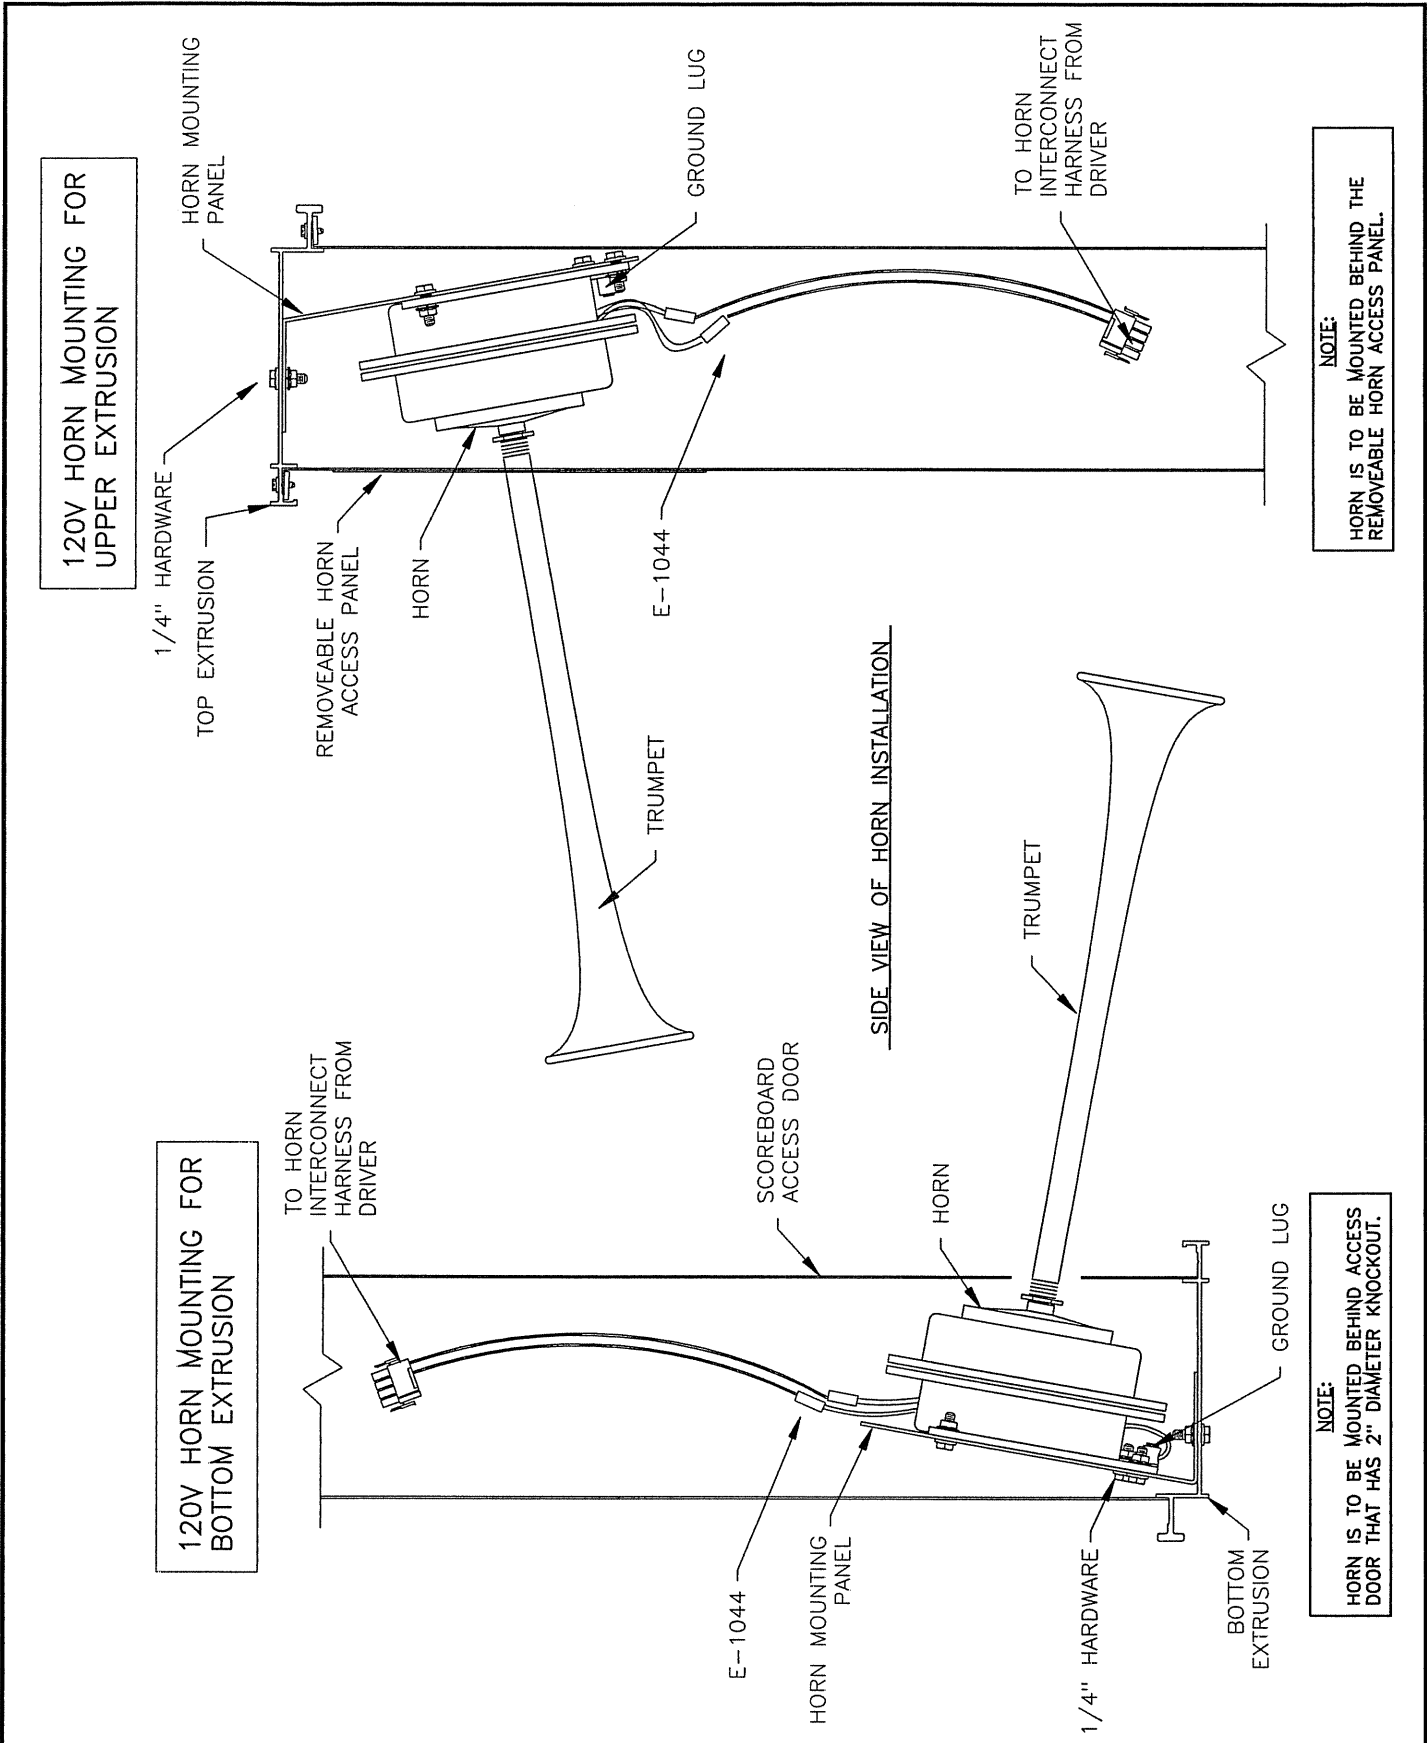


NOTE:
HORN IS TO BE MOUNTED BEHIND THE REMOVEABLE HORN ACCESS PANEL.

NOTE:
HORN IS TO BE MOUNTED BEHIND ACCESS DOOR THAT HAS 2" DIAMETER KNOCKOUT.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: 120V DC HORN MOUNTING			
DES. BY: MCOPLAN	DRAWN BY: MCOPLAN	DATE: 31JAN02	
REVISION	APPR. BY:	1192-E10A-162100	
01	SCALE: 1=5		

REV.	DATE	DESCRIPTION	BY	APPR.
01	22 DEC 04	REPLACED E-1084 WITH E-1044	ADH	

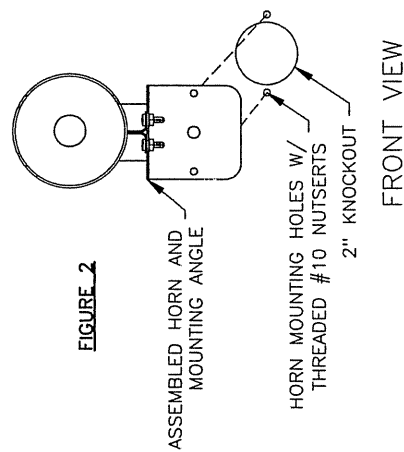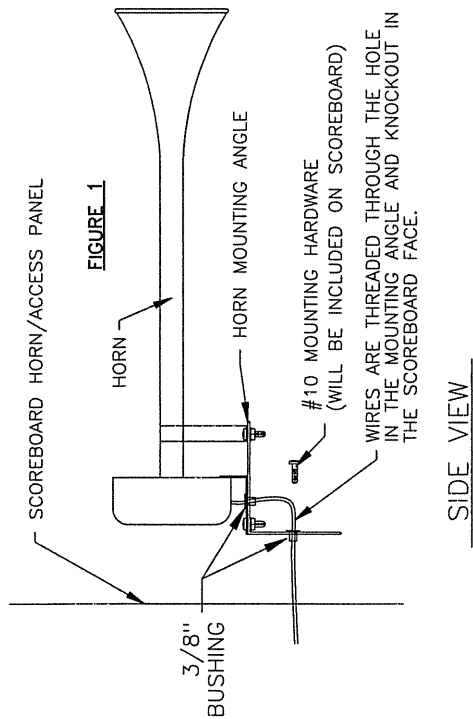

IF A HORN HAS BEEN ORDERED WITH A HORN, FOLLOW THESE INSTRUCTIONS:
 *NOTE THAT THE HORN ACCESS PANEL WILL BE A REMOVEABLE PANEL ON A TWO SECTION SCOREBOARD OR A DOOR ON A SINGLE SECTION SCOREBOARD. BEFORE PROCEEDING, REMOVE THE REMOVEABLE ACCESS PANEL OR OPEN THE DOOR. SEE FIGURE 2 AND 3.

1) THE KNOCKOUT ON THE SCOREBOARD HAS BEEN REMOVED AND THE HORN POWER ENCLOSURE ASSEMBLY HAS BEEN INTERNALLY MOUNTED BY DAKTRONICS. THE HORN MOUNTING ANGLE HAS BEEN ATTACHED TO THE HORN BY DAKTRONICS.
 2) THE HORN HAS BEEN PACKAGED IN BUBBLE WRAP AND WILL BE LOCATED INSIDE THE SCOREBOARD BEHIND THE DOOR (OR THE MIDDLE-MOST DOOR IF THERE ARE MORE THAN ONE ON THE SCOREBOARD.) REMOVE THE HORN WITH ATTACHED HORN MOUNTING ANGLE FROM THE PACKAGING.

3) TO MOUNT THE HORN MOUNTING ANGLE (WITH ATTACHED HORN), LOCATE THE REMOVED KNOCKOUT AND THE TWO MOUNTING HOLES ON THE SCOREBOARD. REMOVE THE TWO #10 SCREWS FROM THE MOUNTING HOLES AND ATTACH THE HORN MOUNTING ANGLE TO THE SCOREBOARD WHILE FEEDING THE TWO GREY WIRES THROUGH THE KNOCKOUT. SEE FIGURE 2.


4) LOCATE THE TWO RED AND GREY WIRES ATTACHED TO THE HORN POWER ENCLOSURE ASSEMBLY. ATTACH ONE OF THE GREY HORN WIRES TO THE RED WIRE AND ATTACH THE OTHER GREY WIRE TO THE BLACK WIRE. USE INCLUDED WIRE NUTS. SEE FIGURE 3.

IF THE HORN IS AN ADDITION TO AN EXISTING SCOREBOARD, FOLLOW THESE INSTRUCTIONS:
 1) THE 2" KNOCKOUT WILL HAVE TO BE REMOVED TO MOUNT THE HORN. LOCATE THE REMOVEABLE HORN ACCESS PANEL WITH THE 2" KNOCKOUT (TWO SECTION SCOREBOARDS) OR LOCATE THE DOOR WITH THE 2" KNOCKOUT (SINGLE SECTION SCOREBOARDS). REMOVE THE KNOCKOUT. SEE FIGURE 2.

2) TO MOUNT THE HORN POWER ENCLOSURE ASSEMBLY, OPEN THE DOOR WITH THE 2" KNOCKOUT (SINGLE SECTION SCOREBOARDS) OR OPEN THE CENTRAL MOST DOOR (TWO SECTION SCOREBOARDS). DRILL TWO 7/32" HOLES 4" APART AND ATTACH THE HORN POWER ENCLOSURE ASSEMBLY USING RIVETS.

3) ATTACH THE HORN TO THE INCLUDED HORN MOUNTING ANGLE WITH THE INCLUDED #10 HARDWARE. SEE FIGURE 1.

4) REFER TO THE STEP 3 AND 4 IN THE PREVIOUS MOUNTING INSTRUCTIONS.

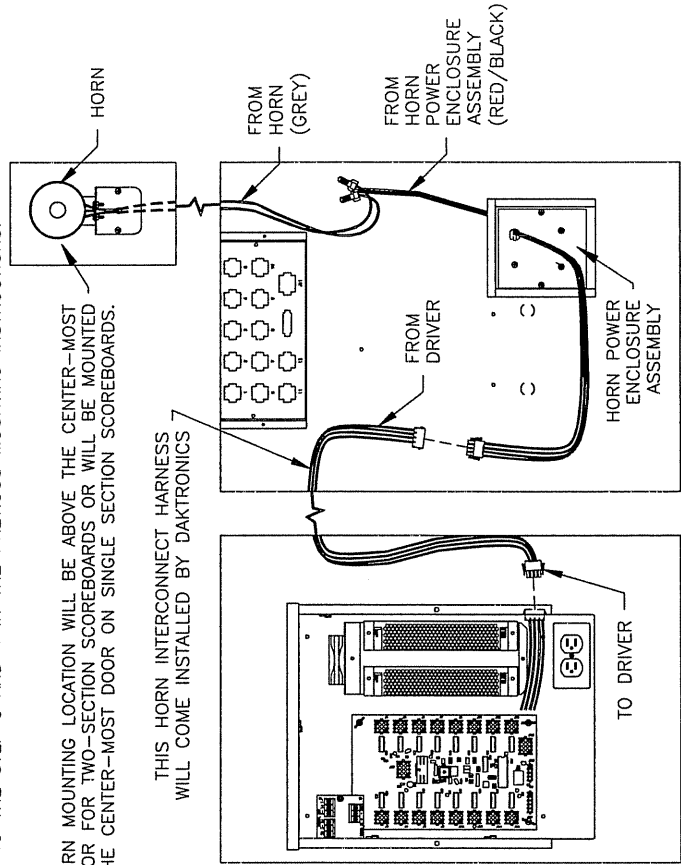



HORN MOUNTING LOCATION WILL BE ABOVE THE CENTER-MOST DOOR FOR TWO-SECTION SCOREBOARDS OR WILL BE MOUNTED ON THE CENTER-MOST DOOR ON SINGLE SECTION SCOREBOARDS.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: HORN INSTALLATION; 12V DC			
DES. BY: MCOPLAN	DRAWN BY: MCOPLAN	DATE: 31JAN02	
REVISION	APPR. BY:	1192-E10A-162102	
	SCALE: 1=12		

REV.	DATE	DESCRIPTION	BY	APPR.

FB-2001-11

SLAVE SECTION

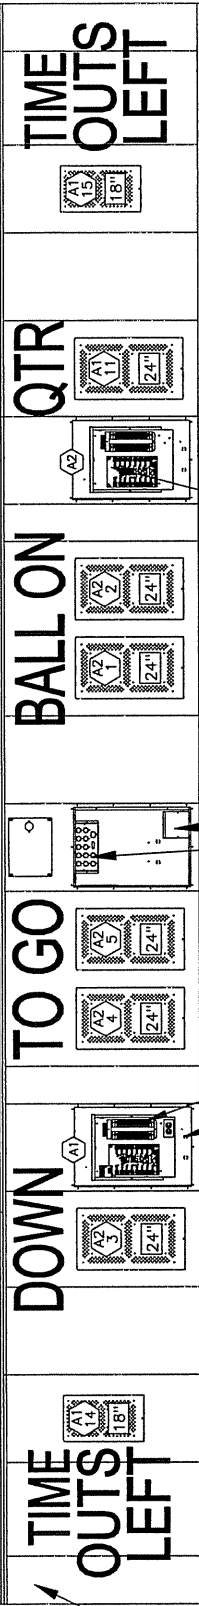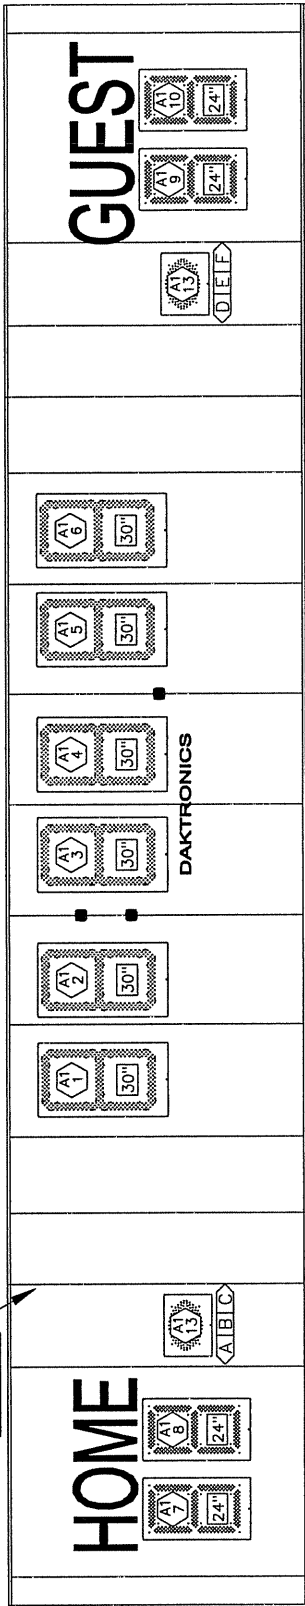

MASTER SECTION

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

KNOCKOUT FOR 1/2" CONDUIT
ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

= LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

= DIGIT SIZE

= SEGMENT DESIGNATIONS


HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER/SIGNAL ENVLOSURE.

REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-2001-11			
DES. BY: MCOPLAN	DRAWN BY: MCOPLAN	DATE: 31JAN02	
REVISION	APPR. BY:	1192-E07A-162141	
		SCALE: 1=45	

FB-2004-11

SLAVE SECTION

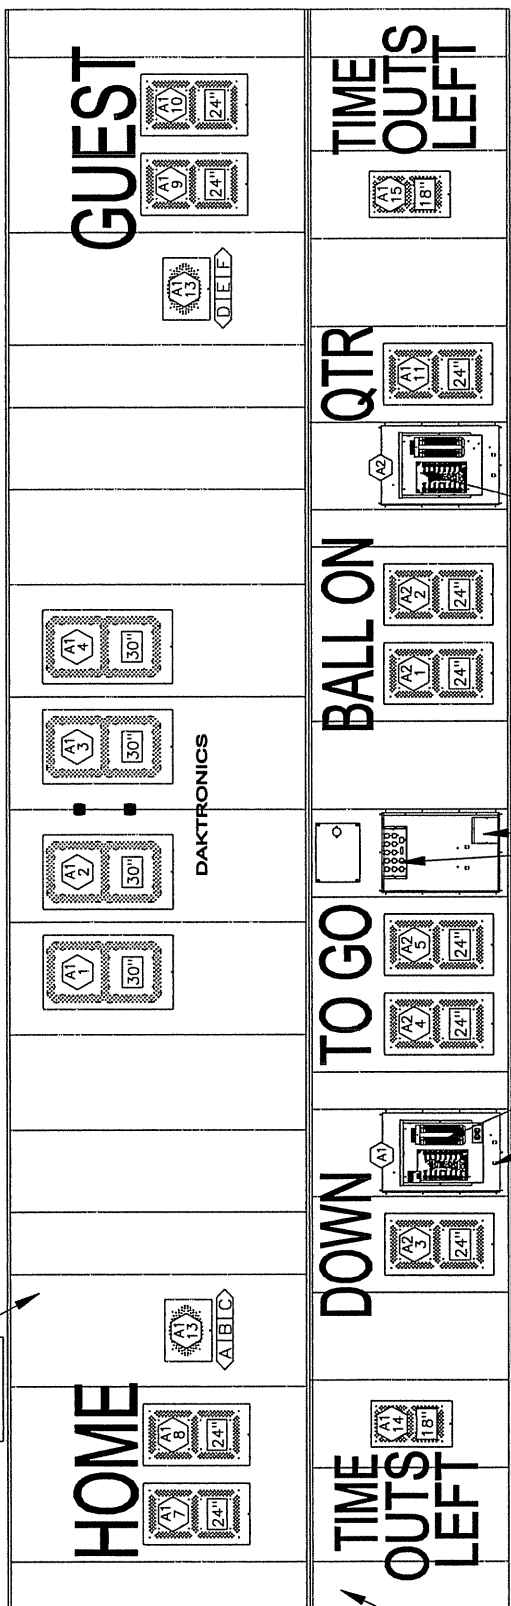

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

KNOCKOUT FOR 1/2" CONDUIT
ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

A1 1 = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.



24" = DIGIT SIZE

A|B|C = SEGMENT DESIGNATIONS

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER/SIGNAL ENVLOSURE.

REV	DATE	DESCRIPTION	BY	APPR.
-----	------	-------------	----	-------

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-2004-11			
DES. BY: MCOPLAN	DRAWN BY: MCOPLAN	DATE: 31JAN02	
REVISION	APPR. BY:	1192-E07A-162146	
	SCALE: 1=45		

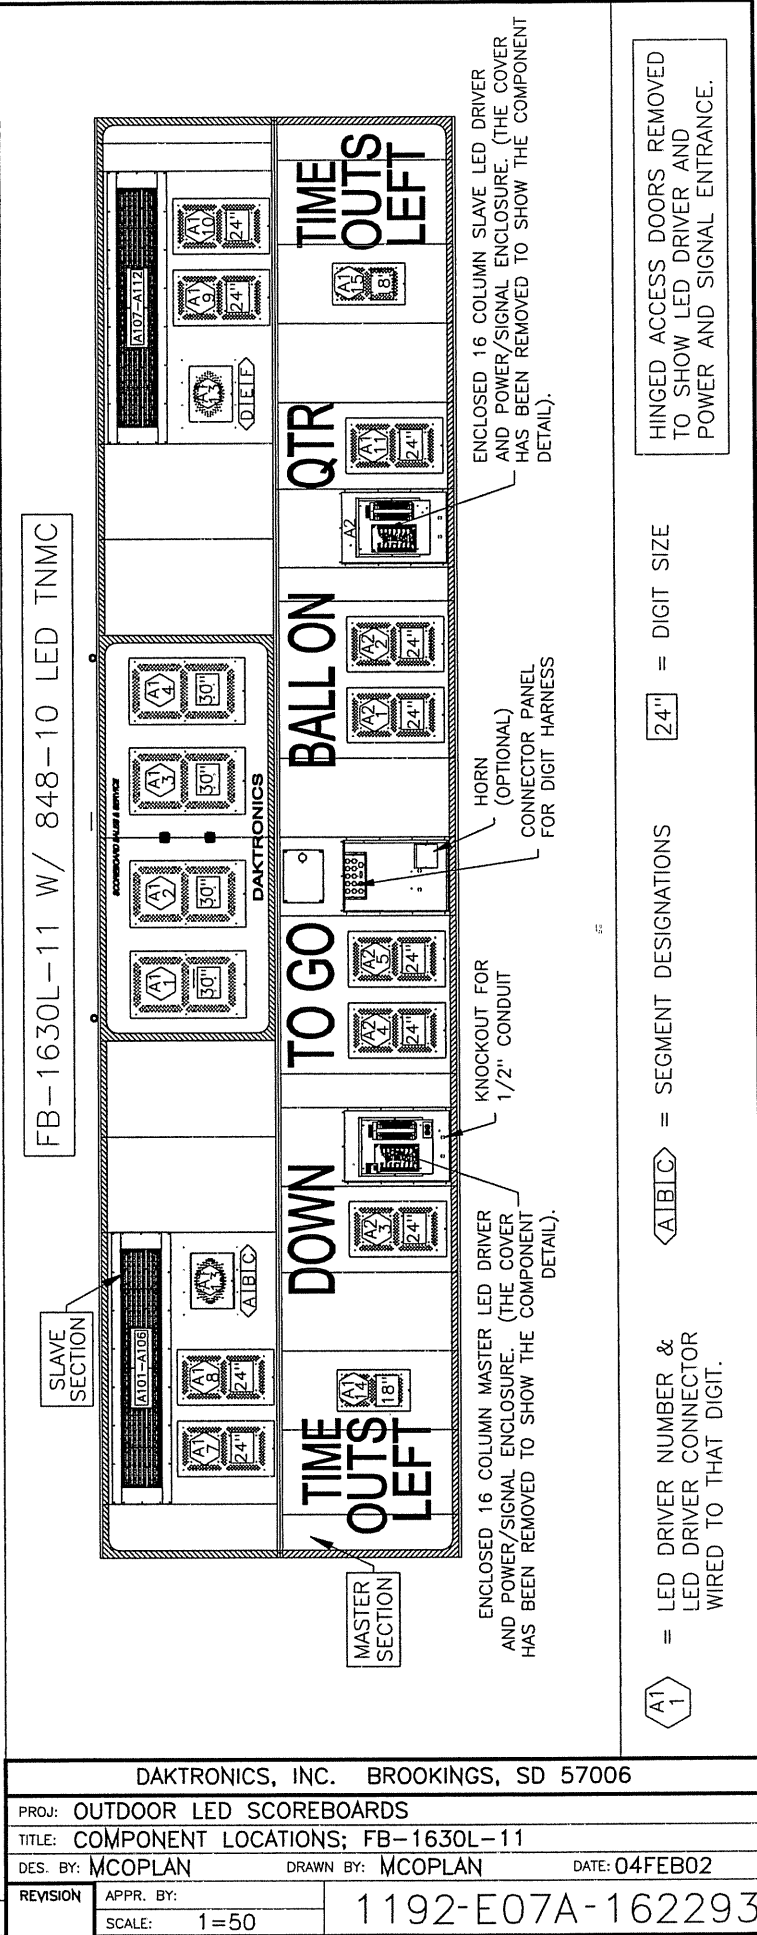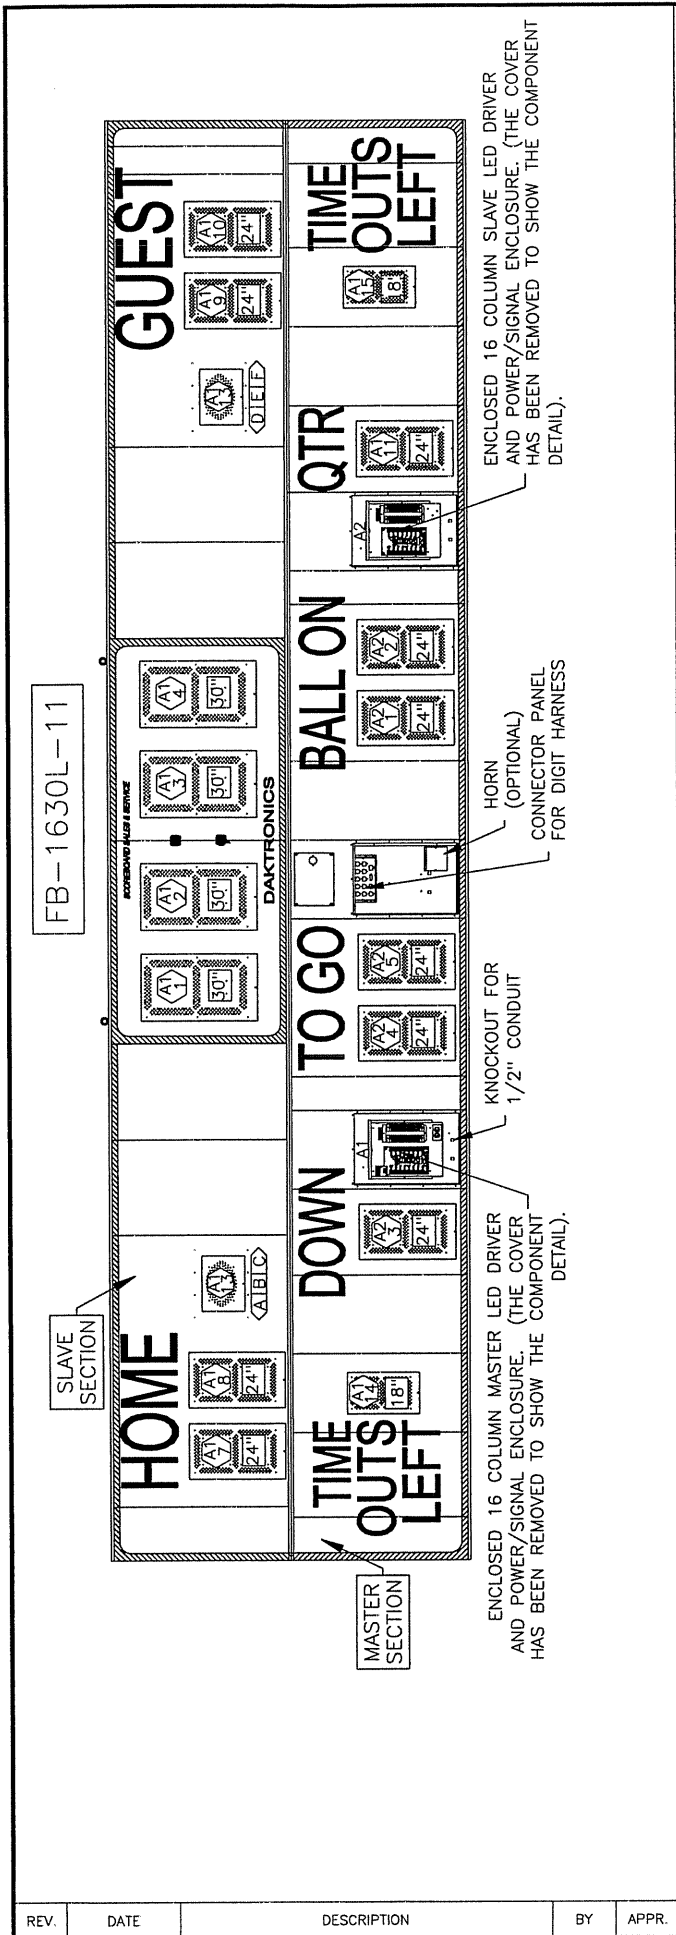

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.

24" = DIGIT SIZE

<A1B1C> = SEGMENT DESIGNATIONS

A1 = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; FB-1630L-11

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN

DATE: 04FEB02

REVISION


APPR. BY:

SCALE: 1=50

1192-E07A-162293

REV.	DATE	DESCRIPTION	BY	APPR.

FB-1830L-11

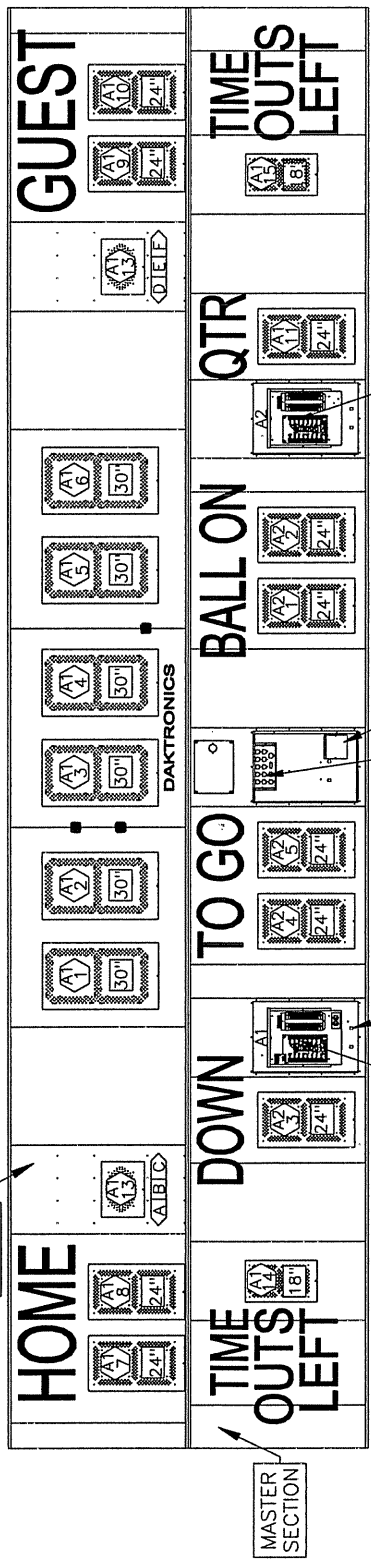


ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

KNOCKOUT FOR 1/2" CONDUIT

FB-1830L-11 W/ 848-10 LED TNMC

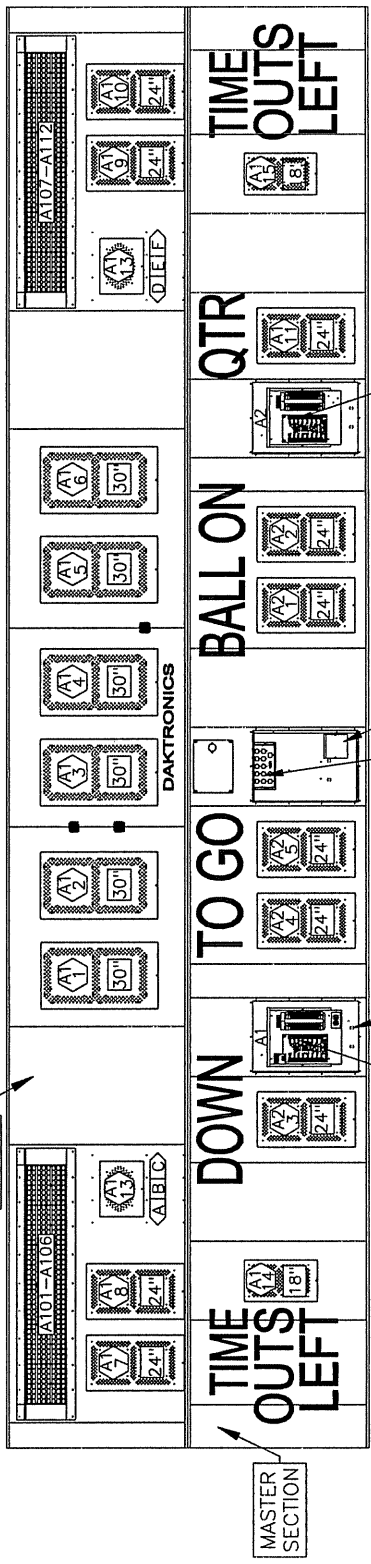

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

KNOCKOUT FOR 1/2" CONDUIT

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.


A1 = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
A1B1C = SEGMENT DESIGNATIONS
24" = DIGIT SIZE

REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-1830L-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 05FEB02			
REVISION	APPR. BY:	1192-E07A-162322	
		SCALE: 1=50	

FB-2002-11

SLAVE SECTION

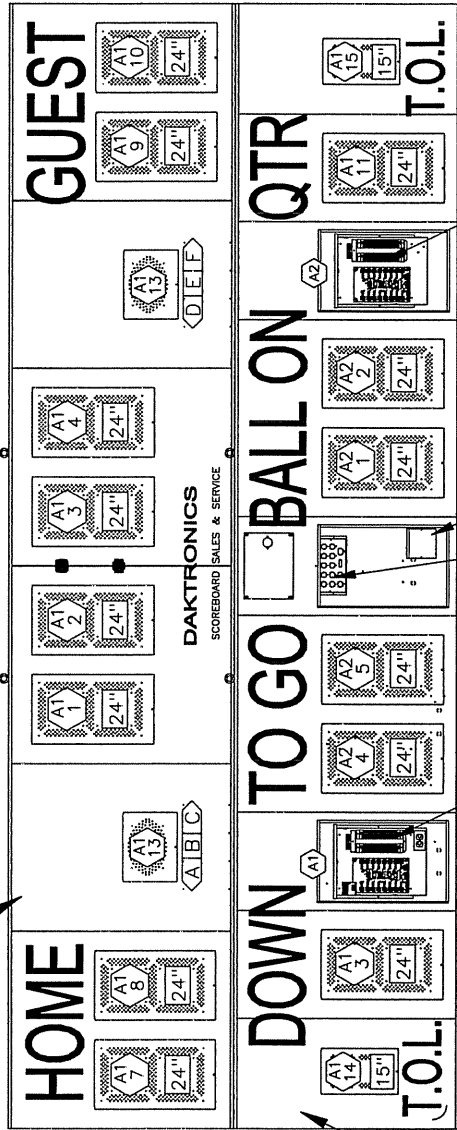

MASTER SECTION

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

A1 1

= LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

24"

= DIGIT SIZE

A1B1C = SEGMENT DESIGNATIONS


HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER AND SIGNAL ENCLOSURE.

REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-2002-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 08FEB02			
REVISION	APPR. BY:	1192-E07A-162558	
	SCALE: 1=40		

SLAVE SECTION

FB-2003-11

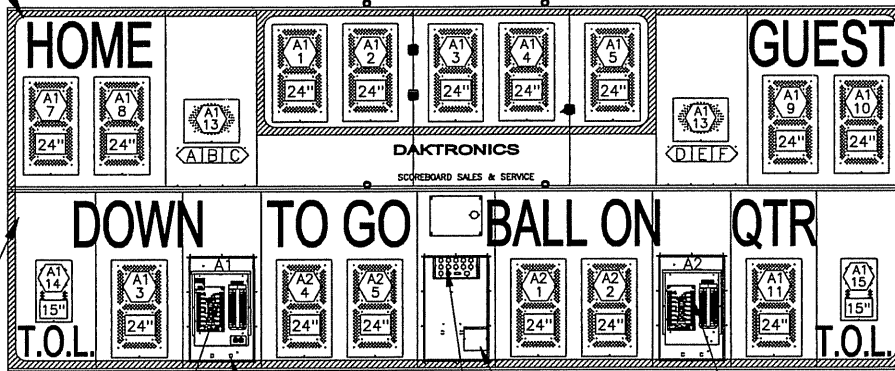

MASTER SECTION

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).


KNOCKOUT FOR 1/2" CONDUIT

HORN (OPTIONAL)
CONNECTOR PANEL FOR DIGIT HARNESS

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

SLAVE SECTION

FB-2003-11 W/ 832-10 LED TNMC

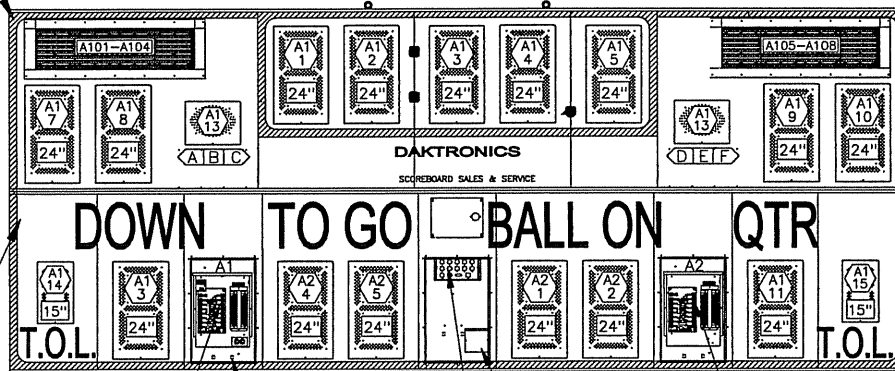

MASTER SECTION

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

KNOCKOUT FOR 1/2" CONDUIT

HORN (OPTIONAL)
CONNECTOR PANEL FOR DIGIT HARNESS

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

= LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

= DIGIT SIZE

= SEGMENT DESIGNATIONS

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; FB-2003-11

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN

DATE: 12FEB02

REV.	DATE	DESCRIPTION	BY	APPR.
01	30 SEP 02	CORRECTED THE DIGIT DESIGNATION FOR POSSESSION INDICATORS PER ECO 23110	MRB	


REVISION

APPR. BY:


SCALE: 1=50

1192-E07A-162738

SO-1624-11

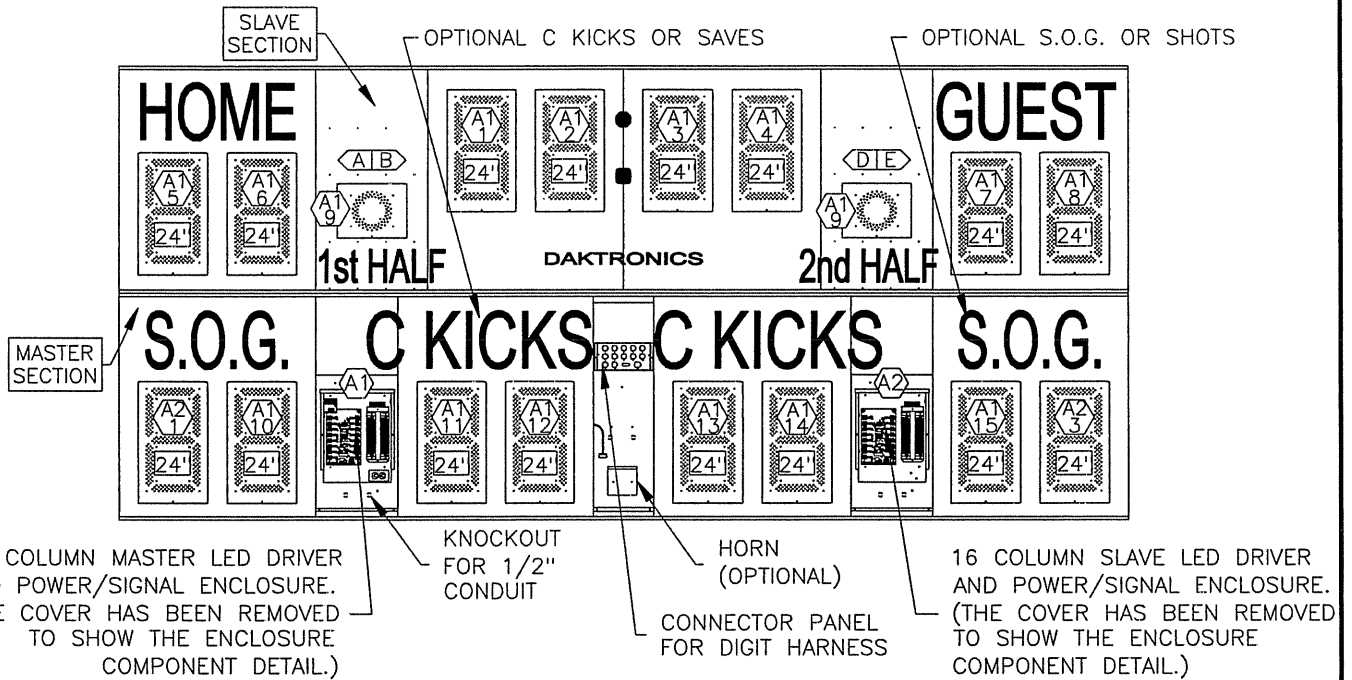

SO-1624-11 W/ 832-10 LED TNMC

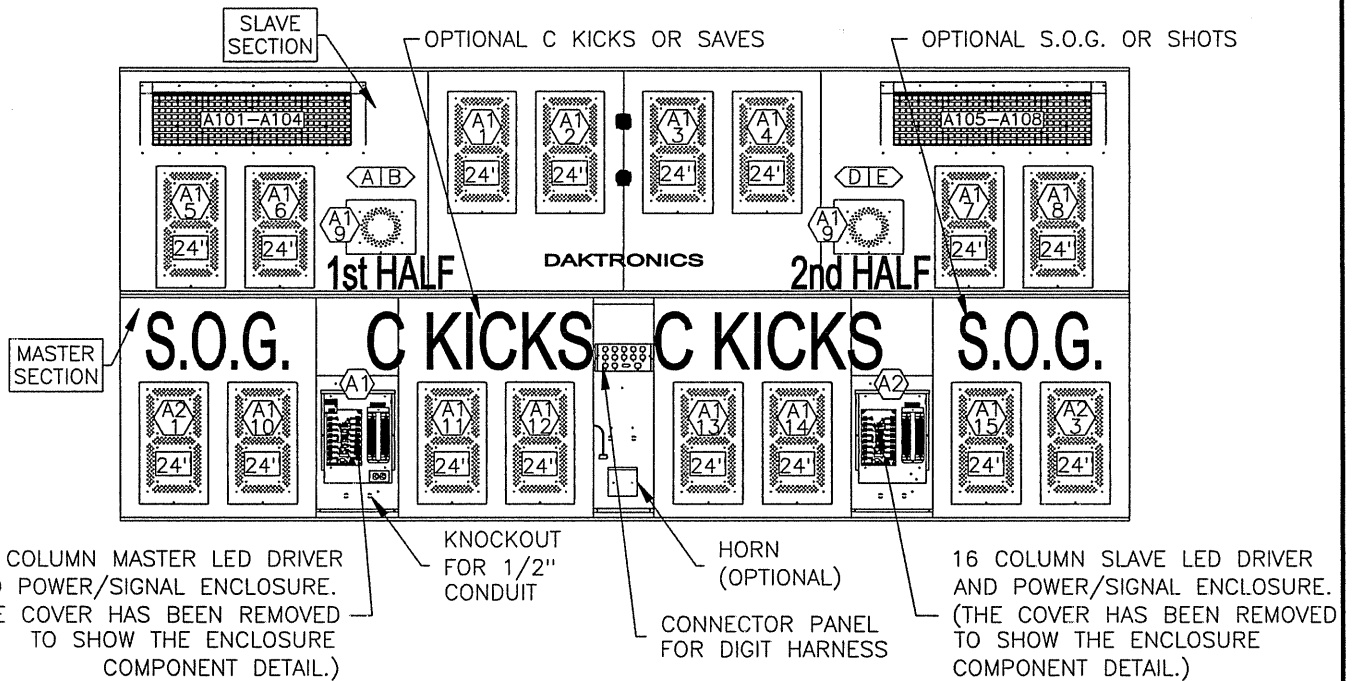

$\langle A2 \rangle_1$ = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

$\langle A1B \rangle$ = SEGMENT DESIGNATIONS

$\langle 24 \rangle$ = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; SO-1624-11

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN

DATE: 14FEB02



REVISION

APPR. BY:

SCALE: 1=40

1192-E07A-162857

REV.	DATE	DESCRIPTION	BY	APPR.

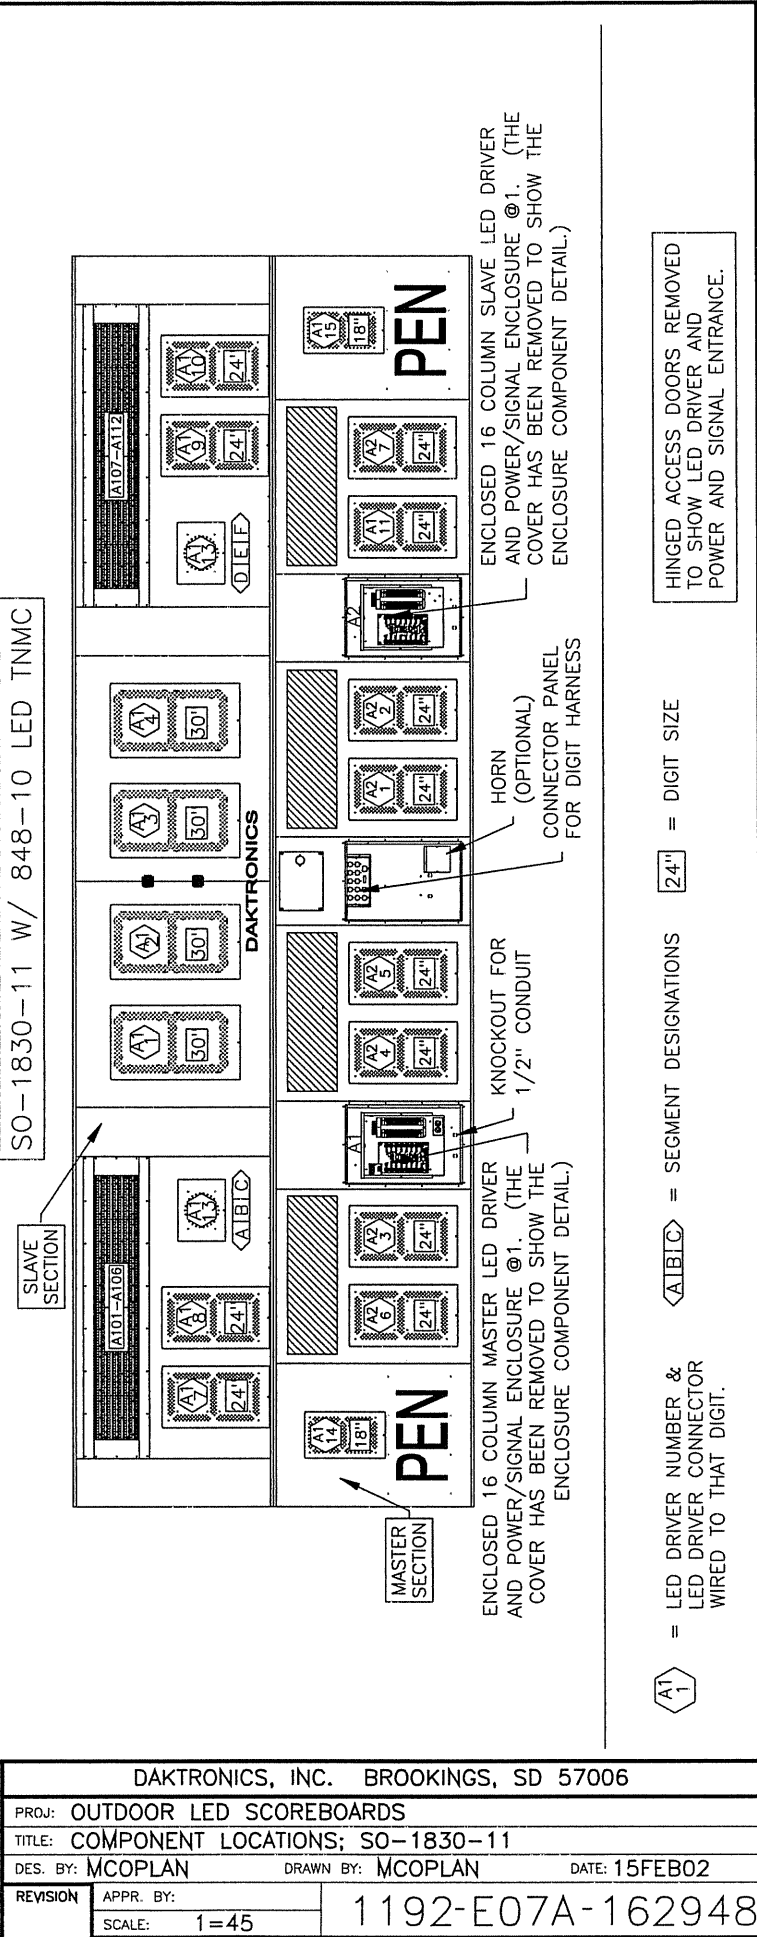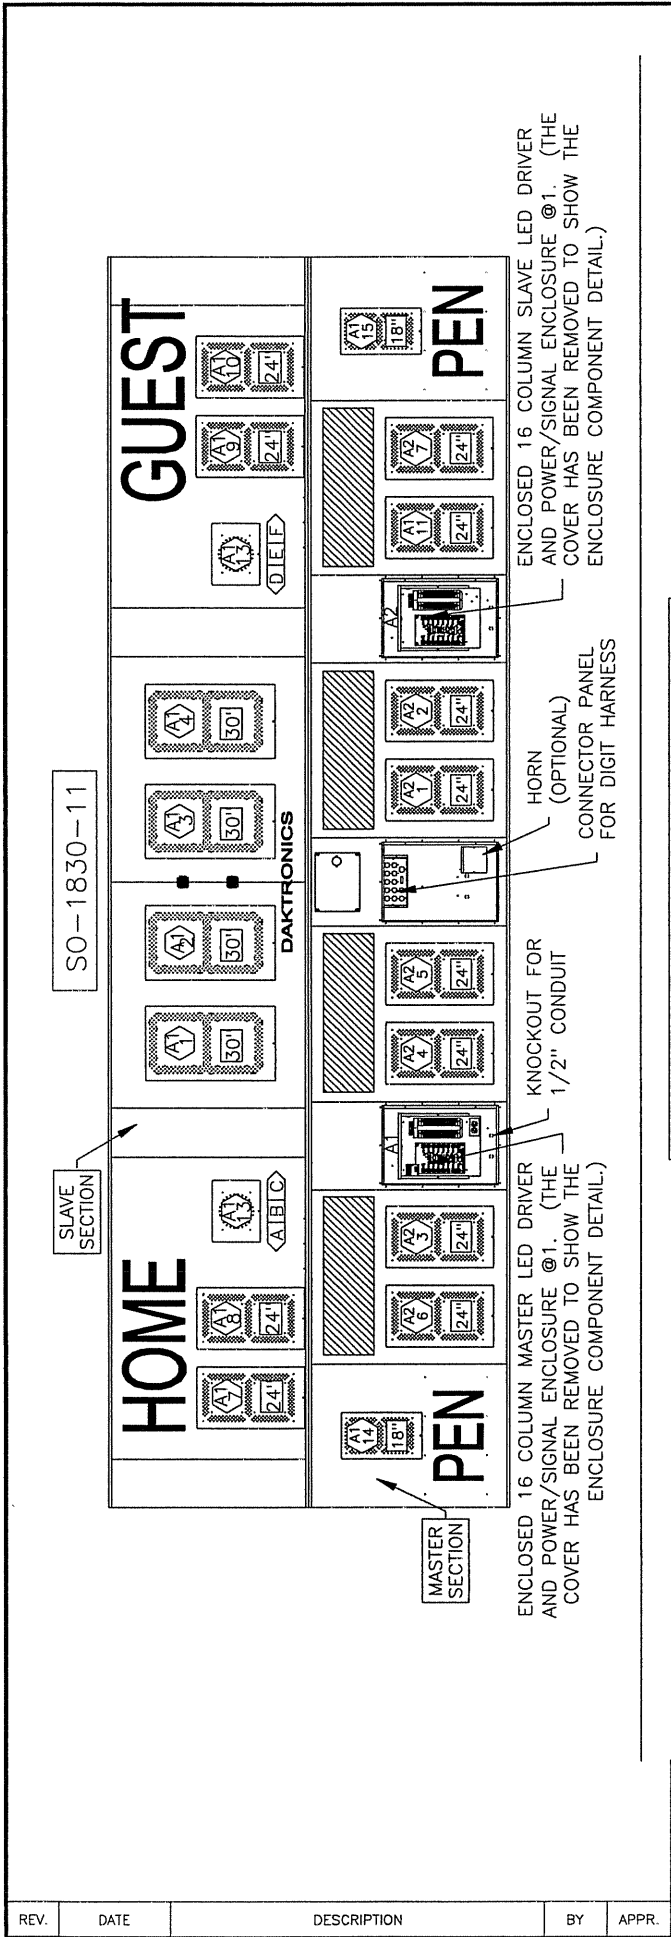

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.

24" = DIGIT SIZE



A1B1C = SEGMENT DESIGNATIONS

A1 = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

A1 1

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; SO-1830-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	DATE: 15FEB02
REVISION	APPR. BY:	1192-E07A-162948	
SCALE: 1=45			

REV.	DATE	DESCRIPTION	BY	APPR.

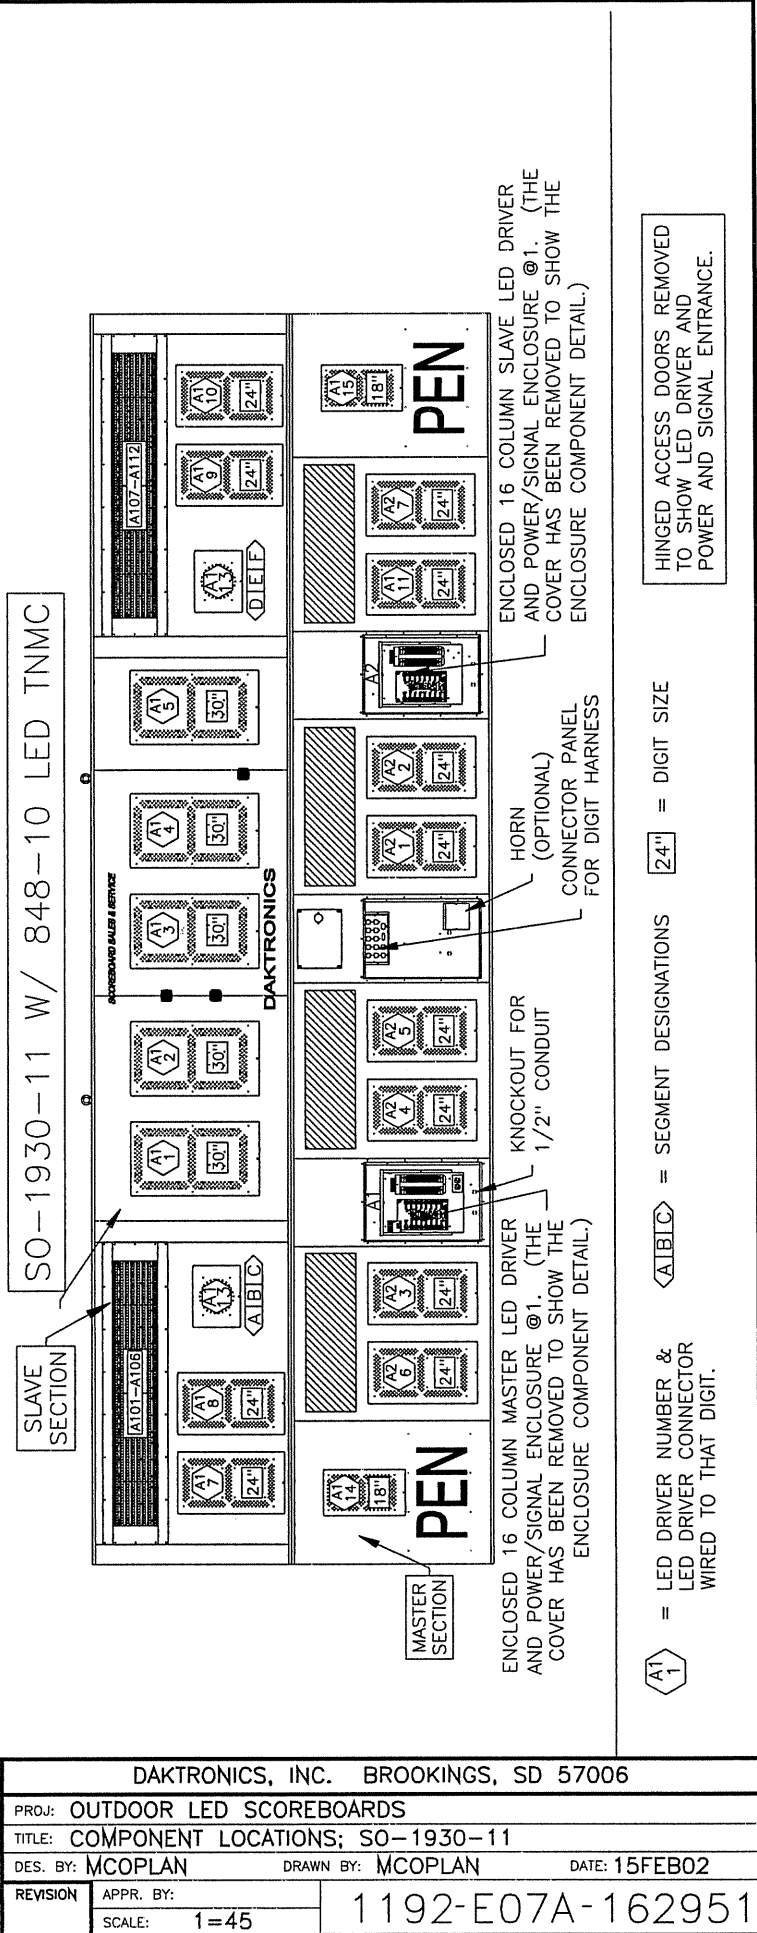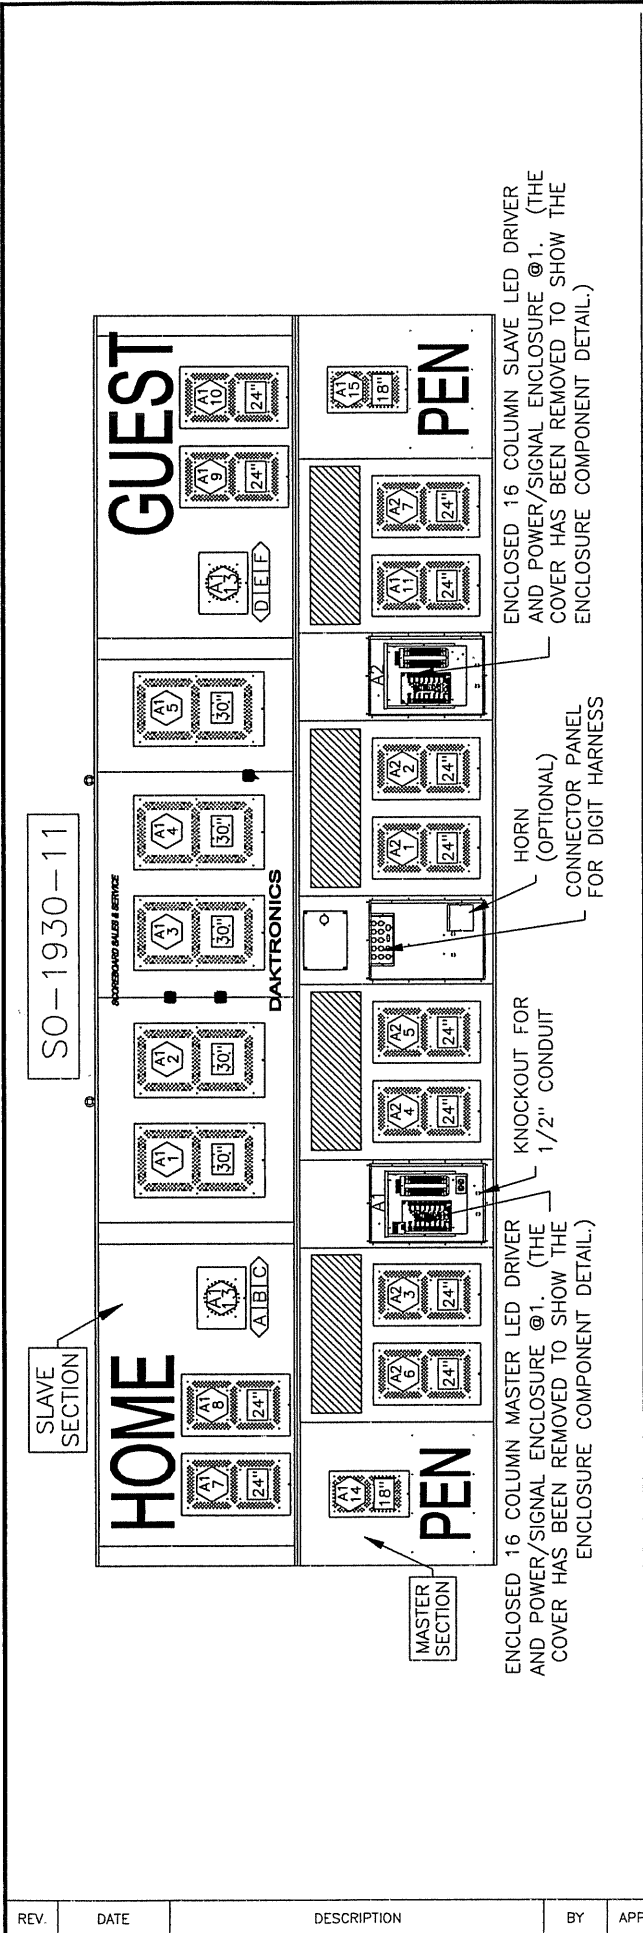


<A1 1> = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
 <A1B1C> = SEGMENT DESIGNATIONS [24"] = DIGIT SIZE
 [24"] = HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.


DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; SO-1930-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
		DATE: 15FEB02	
REVISION	APPR. BY:	1192-E07A-162951	
	SCALE: 1=45		

REV.	DATE	DESCRIPTION	BY	APPR.

SO-1830L-11

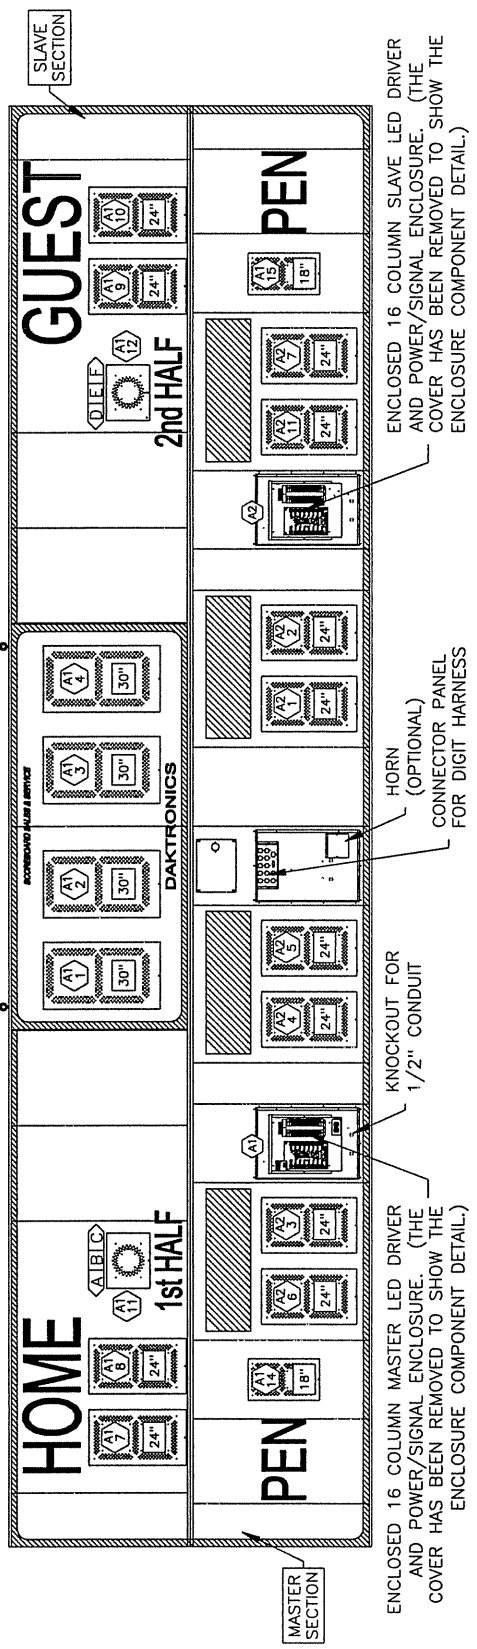

SO-1830L-11 W/ 848-10 LED TNMC

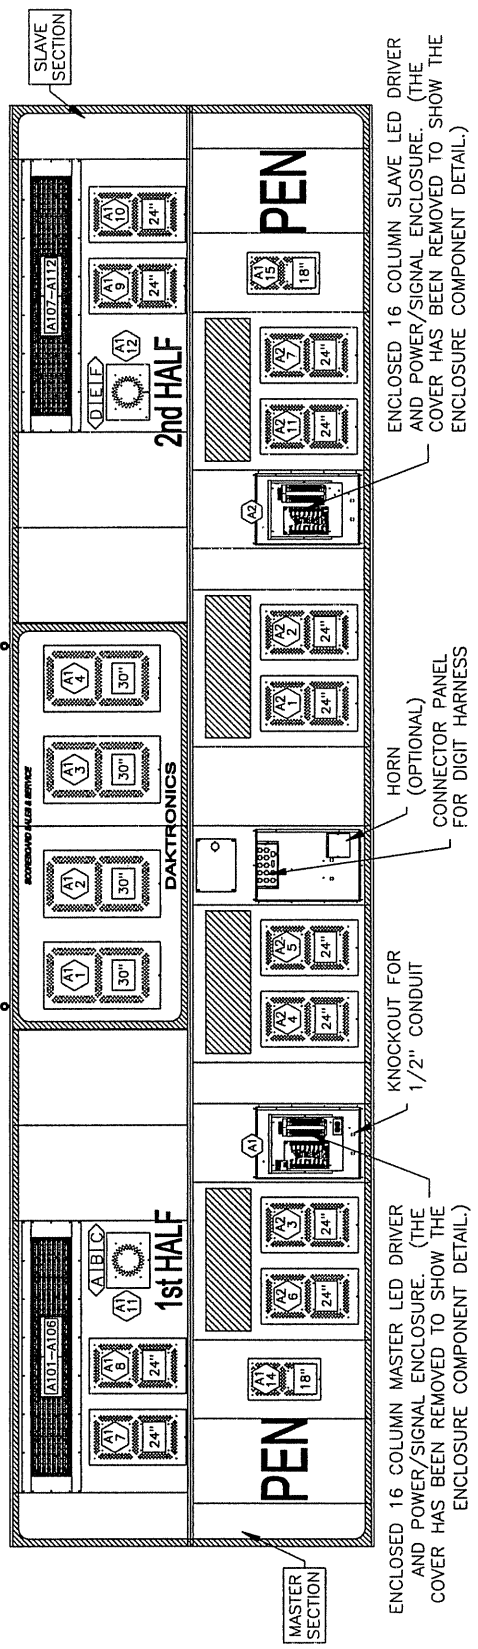

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND POWER AND SIGNAL ENTRANCE.


◁A1B1C▷ = SEGMENT DESIGNATIONS
 [24"] = DIGIT SIZE

◁A1B1C▷ = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; SO-1830L-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 19FEB02			
REVISION	APPR. BY:	1192-E07A-163055	
	SCALE: 1=50		

REV.	DATE	DESCRIPTION	BY	APPR.

MS-2009-11

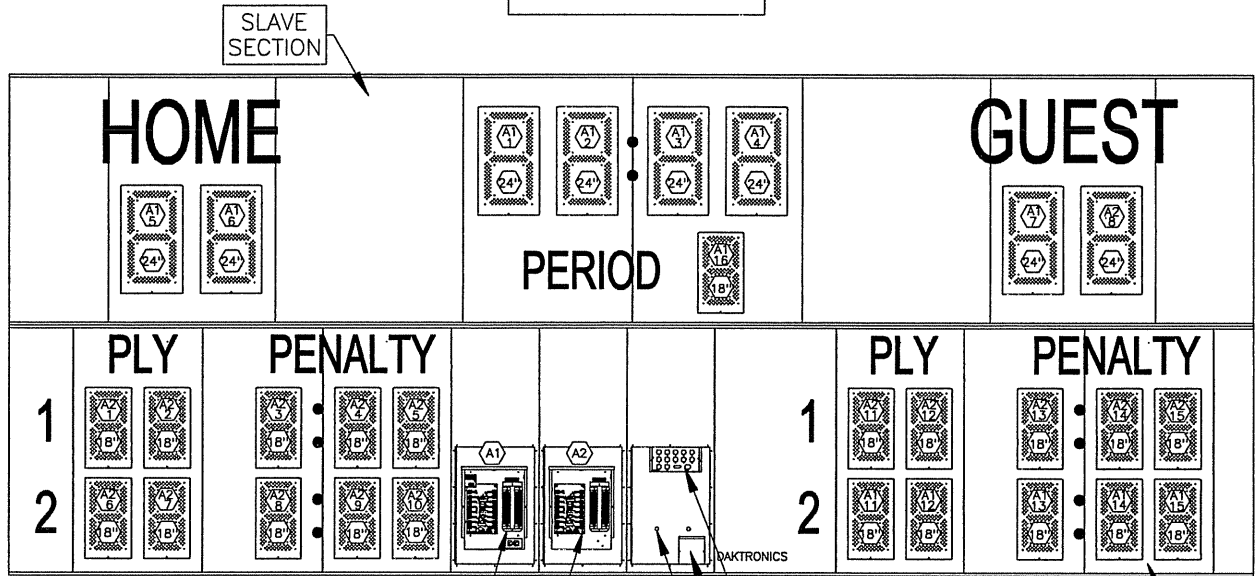

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)



CONNECTOR PANEL FOR HARNESS

HORN (OPTIONAL)

KNOCKOUT FOR 1/2" CONDUIT

MASTER SECTION

FRONT VIEW

-  = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
-  = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND POWER AND SIGNAL ENCLOSURE.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; MS-2009-11

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN

DATE: 01MAR02

REVISION


APPR. BY:

SCALE: 1=45

1192-E07A-163509

REV.	DATE	DESCRIPTION	BY	APPR.

MS-2118-11

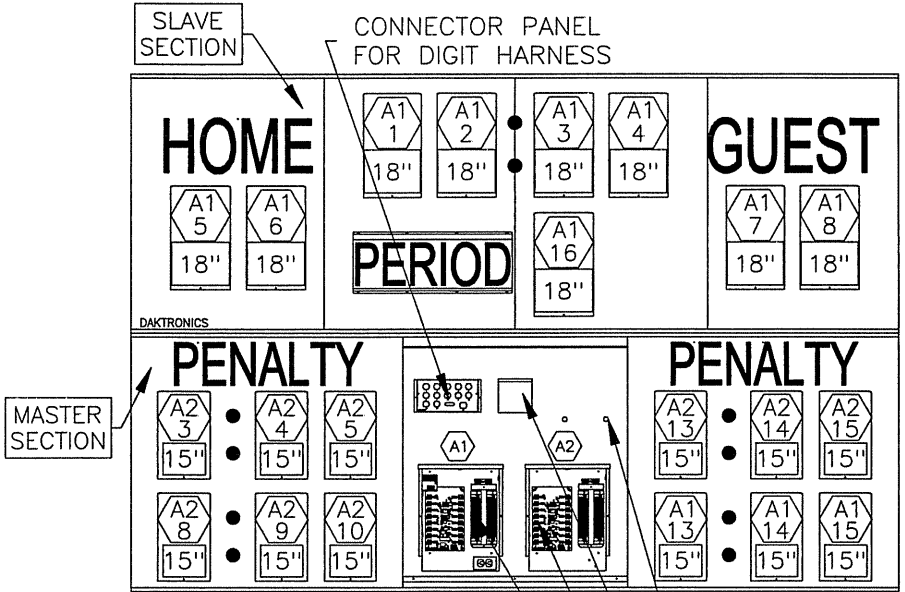

ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)


KNOCKOUT FOR 1/2" CONDUIT

HORN

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

FRONT VIEW

 = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.


 = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.

REV.	DATE	DESCRIPTION	BY	APPR.

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OUTDOOR LED SCOREBOARDS	
TITLE: COMPONENT LOCATIONS; MS-2118-11	
DES. BY: MCOPLAN	DATE: 05MAR02
REVISION	APPR. BY:
SCALE: 1=35	1192-E07A-163616

BA-1524-11 W/ 832-10 LED TNMC

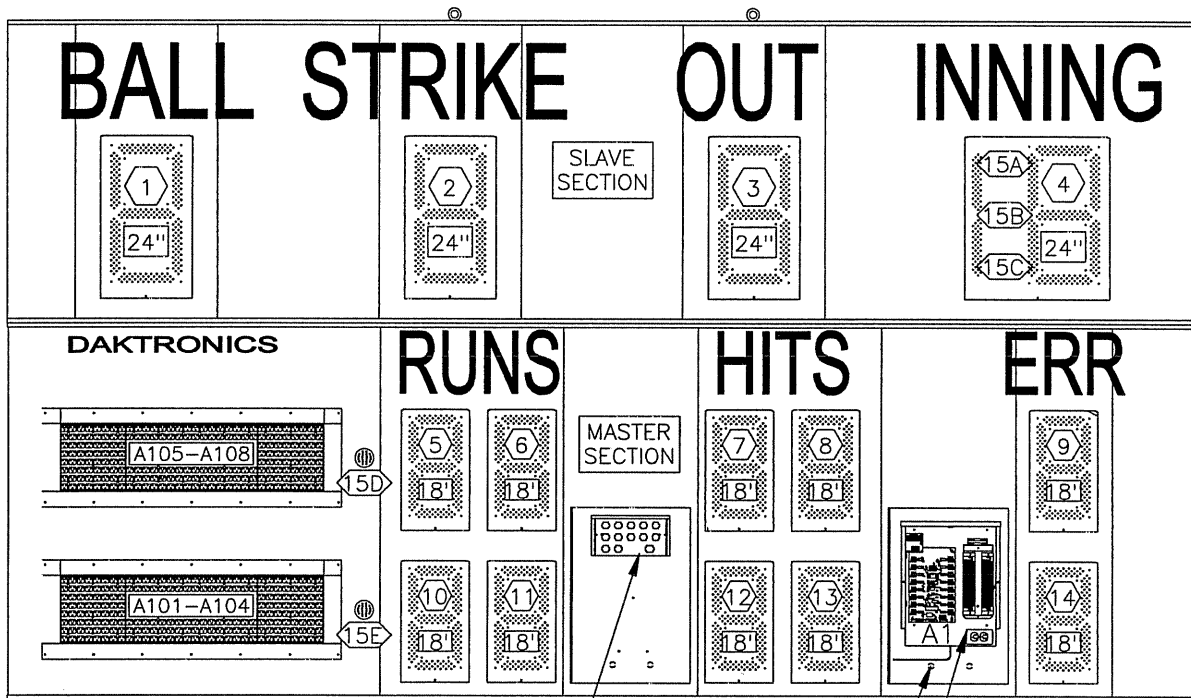

CONNECTOR PANEL FOR DIGIT HARNESS FROM UPPER DISPLAY SECTION.

KNOCKOUTS FOR 1/2" CONDUIT

ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

⑫ = LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

⑮A = LED DRIVER CONNECTOR AND SEGMENT (PIN) NO. WIRED TO THAT INDICATOR

18" = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND POWER & SIGNAL ENCLOSURE.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: COMPONENT LOCATIONS; BA-1524-11 W/ LED TNMC

DES. BY: MCOPLAN

DRAWN BY: MCOPLAN

DATE: 23APR02

REVISION


APPR. BY:

SCALE: 1=30

1192-E07A-165898

REV.	DATE	DESCRIPTION	BY	APPR.

CR-2001-11

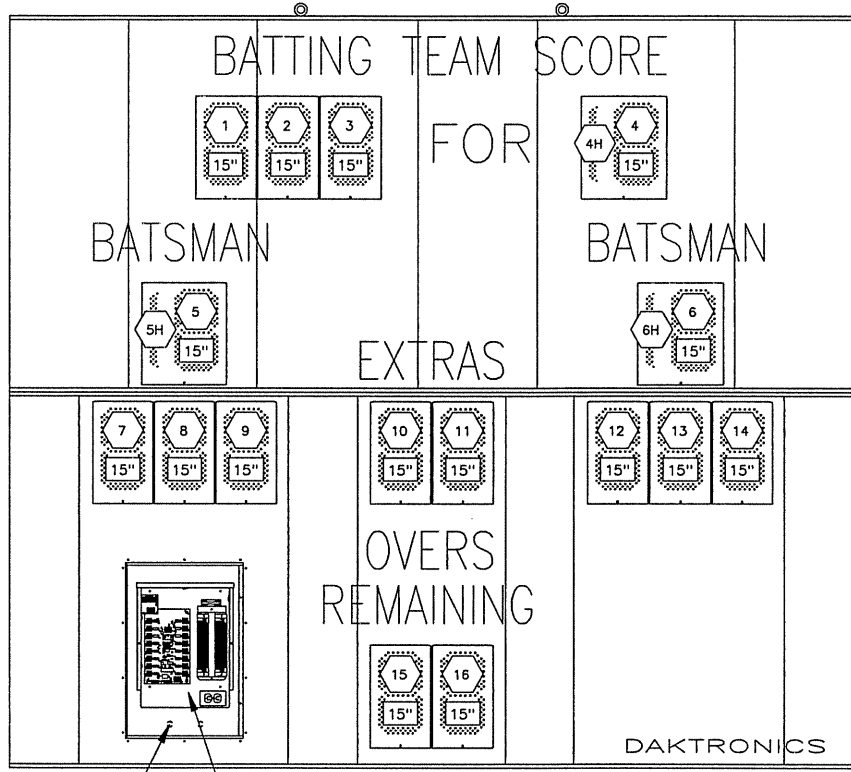

KNOCKOUTS FOR 1/2" CONDUIT

ENCLOSED 16 COLUMN LED DRIVER AND POWER/SIGNAL ENCLOSURE. (THE COVER HAS BEEN REMOVED TO SHOW THE COMPONENT DETAIL).

FRONT VIEW


5 = LED DRIVER CONNECTOR WIRED TO THAT DIGIT.

18" = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.

DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; CR-2001-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 29APR02			
REVISION	APPR. BY:	1192-E07A-166250	
	SCALE: 1=30		

REV.	DATE	DESCRIPTION	BY	APPR.

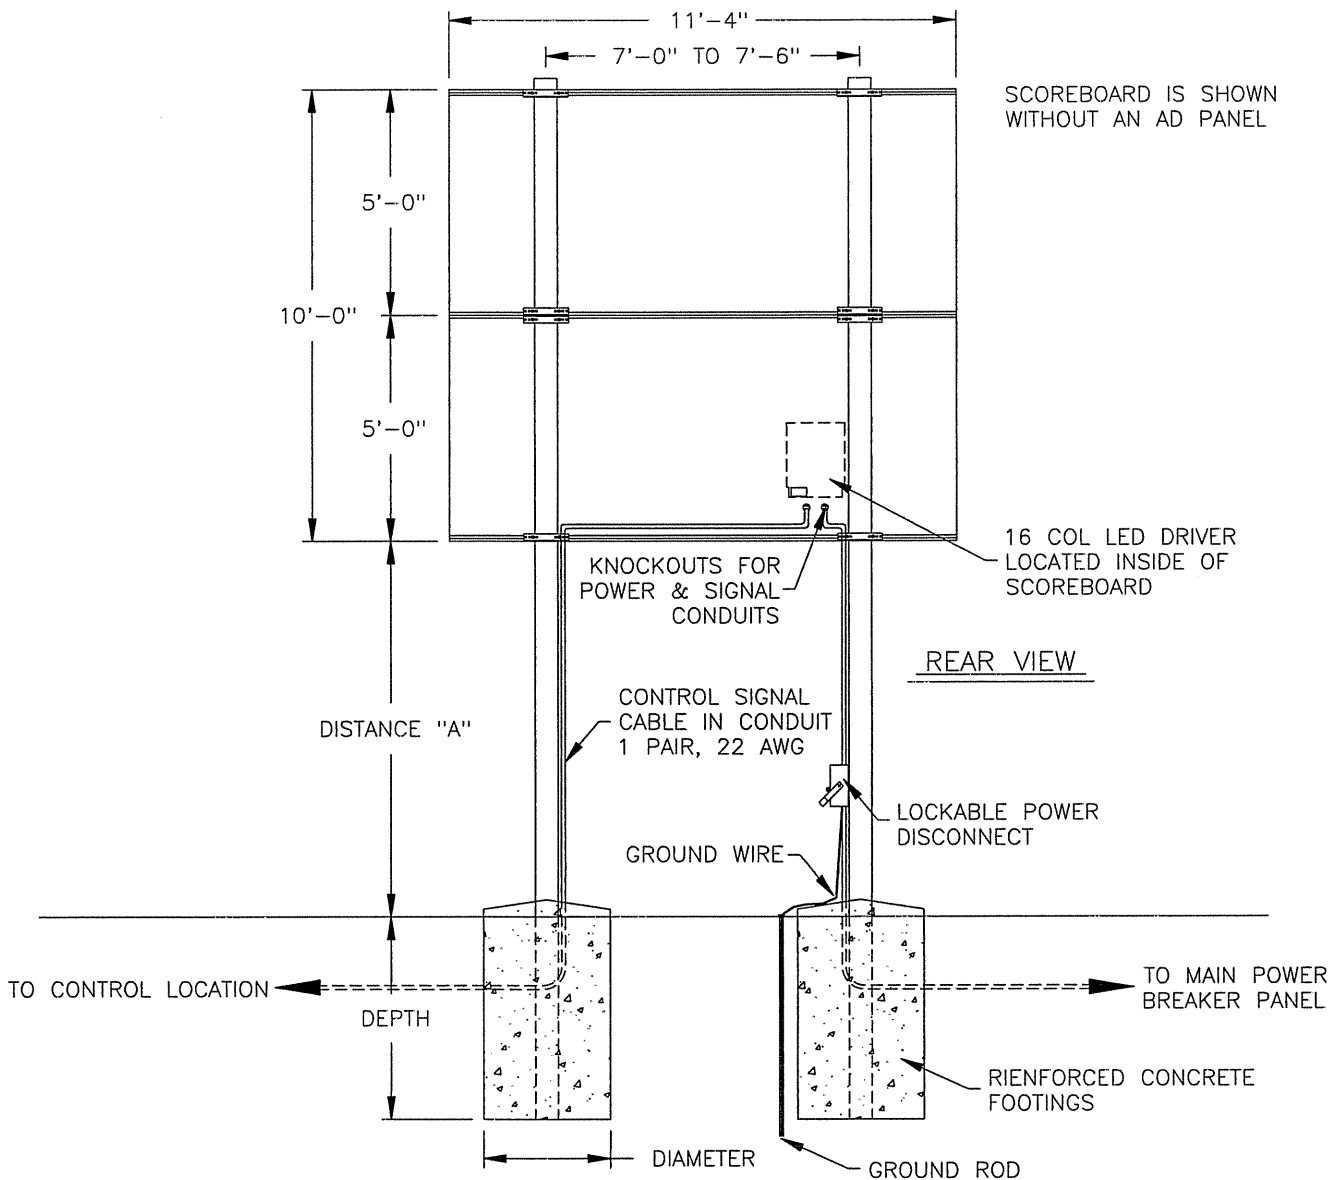

MODEL CR-2001-11 WITHOUT AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	11'-4" x 10'-0"	BEAM FOOTING	W6X20 2.0' X 6.1'	W10X22 2.5' X 6.2'	W12X26 2.5' X 7.3'
12'-0"	11'-4" x 10'-0"	BEAM FOOTING	W8X24 2.5' X 5.9'	W8X24 2.5' X 6.9'	W14X30 2.5' X 7.7'
14'-0"	11'-4" x 10'-0"	BEAM FOOTING	W8X24 2.5' X 6.2'	W8X28 2.5' X 6.8'	W10X33 2.5' X 8.0'

MODEL CR-2001-11 WITH 24"-HIGH AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	11'-4" x 12'-0"	BEAM FOOTING	W8X24 2.5' X 6.2'	W8X24 2.5' X 6.8'	W8X31 2.5' X 8.0'
12'-0"	11'-4" x 12'-0"	BEAM FOOTING	W12X26 2.5' X 6.4'	W8X28 2.5' X 7.0'	W10X33 2.5' X 8.3'
14'-0"	11'-4" x 12'-0"	BEAM FOOTING	W8X28 2.5' X 6.7'	W8X31 2.5' X 7.4'	W10X39 2.5' X 8.7'

FOOTING = DIAMETER X DEPTH

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL BEARING PRESSURE OF 2000 LB/FT² AND UBC WIND CODE.

ACTUAL FOOTING DEPTH AND DIAMETER FOR A PARTICULAR INSTALLATION MUST BE DETERMINED BY A QUALIFIED STRUCTURAL ENGINEER, USING DATA FROM A SOIL SAMPLE TEST AT THE SITE.

DAKTRONICS, INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS

TITLE: INSTALLATION SPECIFICATIONS; CR-2001-11

DES. BY: MCOPL/RNEYEN DRAWN BY: MCOPLAN

DATE: 15MAY02

REVISION


APPR. BY:

SCALE: 1=50


1192-E07A-166286


REV.	DATE	DESCRIPTION	BY	APPR.

MS-2918-11

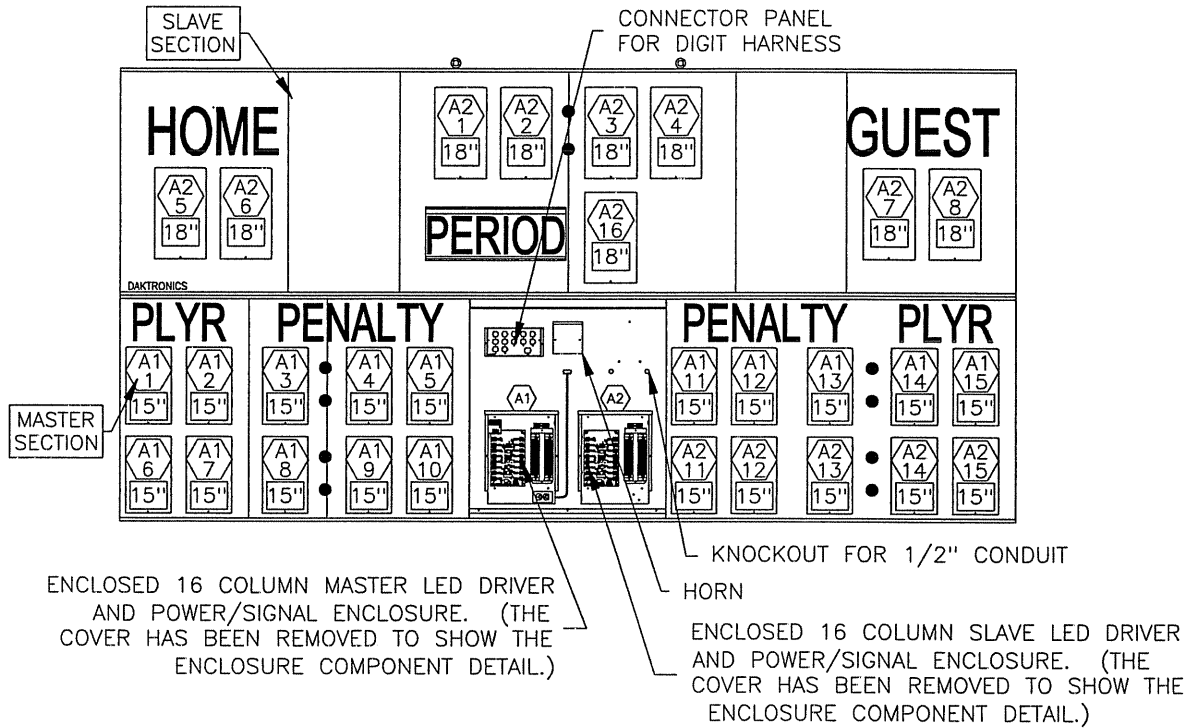

FRONT VIEW

 = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.


 = DIGIT SIZE

HINGED ACCESS DOORS REMOVED TO SHOW THE LED DRIVER AND THE POWER/SIGNAL ENCLOSURE.

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.			
DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; MS-2918-11			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 24JUL02			
REVISION	APPR. BY:	1192-E07A-172038	
	SCALE: 1=40		

REV.	DATE	DESCRIPTION	BY	APPR.

SCOREBOARD IS SHOWN WITHOUT AN AD PANEL.

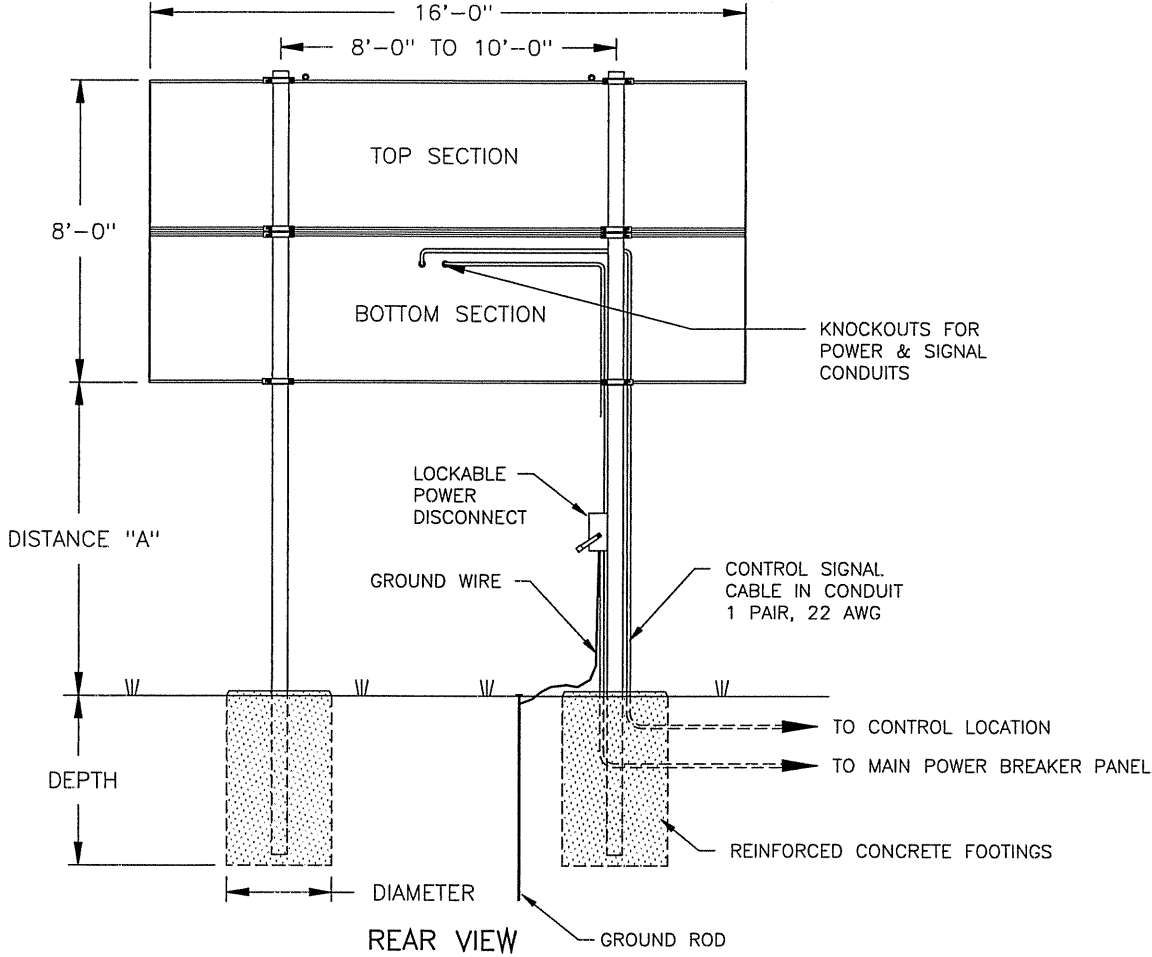

MODEL MS-2918 WITHOUT AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	16'-0" x 8'-0"	BEAM FOOTING	W8x24 3.0' x 5.4'	W8x28 3.0' x 6.0'	W8x35 3.0' x 7.0'
12'-0"	16'-0" x 8'-0"	BEAM FOOTING	W8x28 3.0' x 5.6'	W8x31 3.0' x 6.2'	W10x39 3.0' x 7.3'
14'-0"	16'-0" x 8'-0"	BEAM FOOTING	W8x31 3.0' x 5.9'	W8x35 3.0' x 6.5'	W10x45 3.0' x 7.7'

MODEL MS-2918 WITH 30"-HIGH AD PANEL					
DISTANCE "A" (SEE FIGURE)	TOTAL DISPLAY SIZE		DESIGN WIND VELOCITY		
			70 MPH	80 MPH	100 MPH
10'-0"	16'-0" x 10'-6"	BEAM FOOTING	W8x31 3.0' x 6.1'	W8x35 3.0' x 6.7'	W12x45 3.0' x 7.9'
12'-0"	16'-0" x 10'-6"	BEAM FOOTING	W8x35 3.0' x 6.4'	W8x40 3.0' x 7.0'	W8x48 3.0' x 8.3'
14'-0"	16'-0" x 10'-6"	BEAM FOOTING	W10x39 3.0' x 6.6'	W10x45 3.0' x 7.3'	W10x54 3.0' x 8.6'

FOOTING = DIAMETER X DEPTH

FOOTING DIMENSIONS ARE SUGGESTIONS ONLY, PROVIDED TO ASSIST WITH ESTIMATING INSTALLATION COSTS AND ARE NOT INTENDED FOR CONSTRUCTION PURPOSES.

FOOTING DIMENSIONS ARE BASED ON ASSUMED SOIL BEARING PRESSURE OF 2000 LB/FT²

ACTUAL FOOTING DEPTH AND DIAMETER FOR A PARTICULAR INSTALLATION MUST BE DETERMINED BY A QUALIFIED STRUCTURAL ENGINEER, USING DATA FROM A SOIL SAMPLE TEST AT THE SITE.

DAKTRONICS, INC. IS NOT RESPONSIBLE FOR STRUCTURES DESIGNED AND INSTALLED BY OTHERS.

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR SCOREBOARDS

TITLE: INSTALLATION SPECIFICATIONS, MS-2918

DES. BY: MCOPLAN DRAWN BY: MCOPLAN DATE: 25JUL02


REVISION APPR. BY: SCALE: 1=60

1091-R10A-172188

REV.	DATE	DESCRIPTION	BY	APPR.

FB-2001-11 W/ LED TNMC

SLAVE SECTION

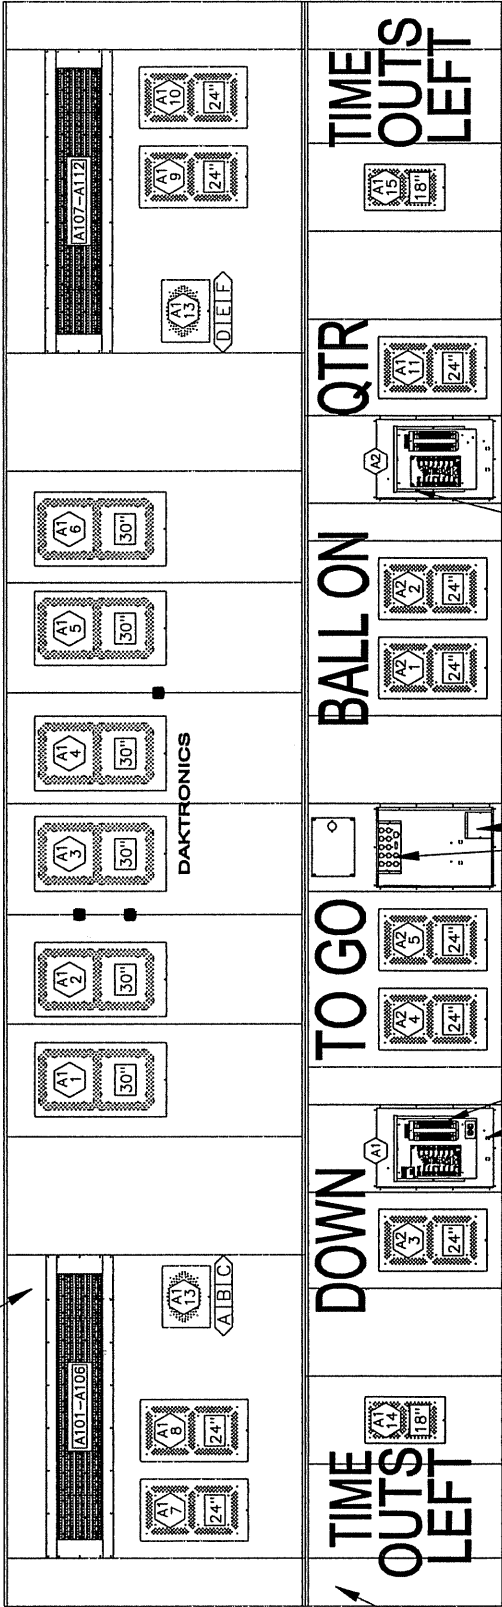




MASTER SECTION

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

KNOCKOUT FOR 1/2" CONDUIT


ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)


-  = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
-  = DIGIT SIZE
-  = SEGMENT DESIGNATIONS

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER AND SIGNAL ENCLOSURE.

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.			
DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-2001-11 W/ LED TNMC			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 01AUG02			
REVISION	APPR. BY:	1192-E07A-172659	
	SCALE: 1=45		

REV.	DATE	DESCRIPTION	BY	APPR.

 = LOCATION OF TNMC

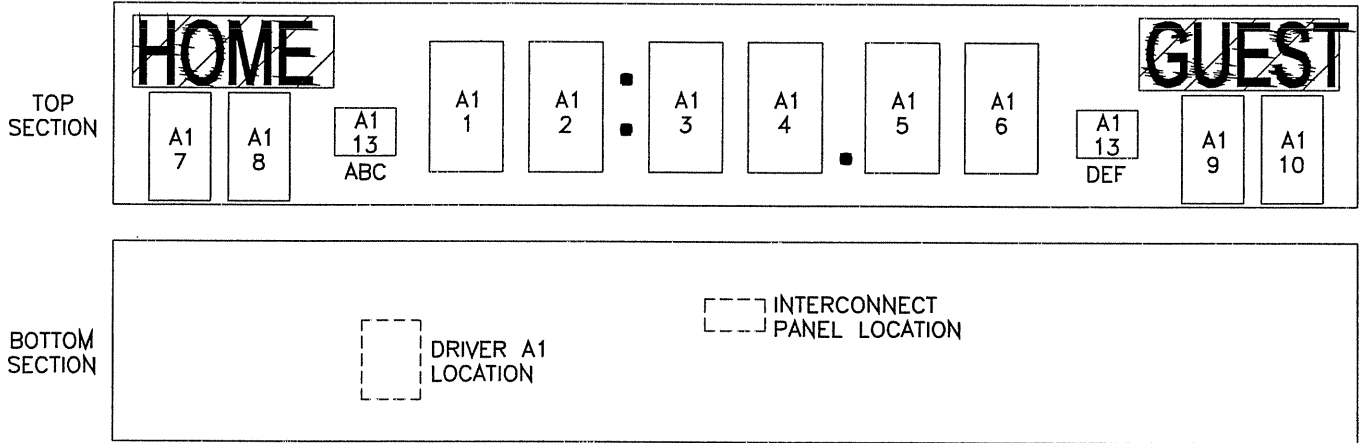

-DEPENDING ON THE MODEL OF THE DISPLAY ORDERED, THE OVERALL LOOK OF THE DISPLAY MAY BE SLIGHTLY DIFFERENT BUT THE DIGIT DESIGNATION WILL REMAIN THE SAME. SOME MODELS MAY OR MAY NOT HAVE ONE OR BOTH OF THE TWO RIGHT CLOCK DIGITS (A1-5 AND A1-6).

DIGIT DESIGNATION (TOP SECTION)	INTERCONNECT PANEL LABELING (PANEL LOCATED IN THE BOTTOM SECTION)	DRIVER DESIGNATION (DRIVER LOCATED IN THE BOTTOM SECTION)
A1-1	1	A1-1
A1-2	2	A1-2
A1-3	3	A1-3
A1-4	4	A1-4
A1-5	5	A1-5
A1-6	6	A1-6
A1-7	7	A1-7
A1-8	8	A1-8
A1-9	9	A1-9
A1-10	10	A1-10
A1-13 ABC	11	A1-13
A1-13 DEF	12	A1-13
LED TNMC	TNMC OR P42	TNMC OR J42
INCANDESCENT TNMC	TNMC OR P41	TNMC OR J41
		TO ENTRANCE ENCL

} SEE SCHEMATIC

THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR SCOREBOARDS

TITLE: INTERCONNECT PANEL DIGIT DESIGNATION; FB DISPLAYS

DES. BY: MCOPLAN DRAWN BY: MCOPLAN DATE: 05SEP02


REVISION APPR. BY: SCALE: NONE

1091-E07A-174754

REV.	DATE	DESCRIPTION	BY	APPR.

FB-2004-11 W/ LED TNMC




SLAVE SECTION

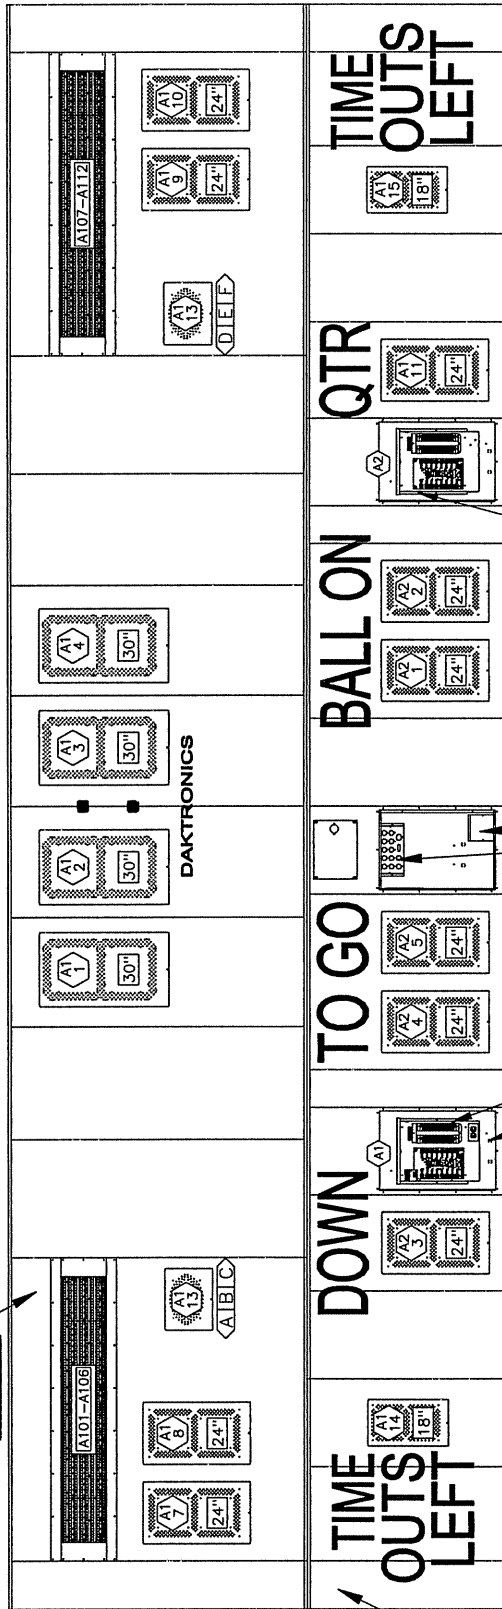

ENCLOSED 16 COLUMN SLAVE LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

HORN (OPTIONAL) CONNECTOR PANEL FOR DIGIT HARNESS

KNOCKOUT FOR 1/2" CONDUIT
ENCLOSED 16 COLUMN MASTER LED DRIVER AND POWER/SIGNAL ENCLOSURE @1. (THE COVER HAS BEEN REMOVED TO SHOW THE ENCLOSURE COMPONENT DETAIL.)

-  = LED DRIVER NUMBER & LED DRIVER CONNECTOR WIRED TO THAT DIGIT.
-  = DIGIT SIZE
-  = SEGMENT DESIGNATIONS

HINGED ACCESS DOORS REMOVED TO SHOW LED DRIVER AND THE POWER AND SIGNAL ENVLOSURE.



THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.			
DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: COMPONENT LOCATIONS; FB-2004-11 W/ LED TNMC			
DES. BY: MCOPLAN		DRAWN BY: MCOPLAN	
DATE: 11NOV02			
REVISION	APPR. BY:	1192-E07A-177842	
	SCALE: 1=45		

REV.	DATE	DESCRIPTION	BY	APPR.



GUEST

HOME

AS-5000
MASTER-MASTER
LAYOUT

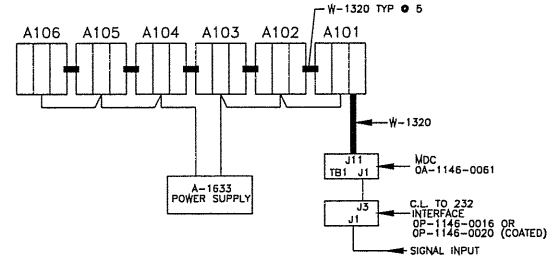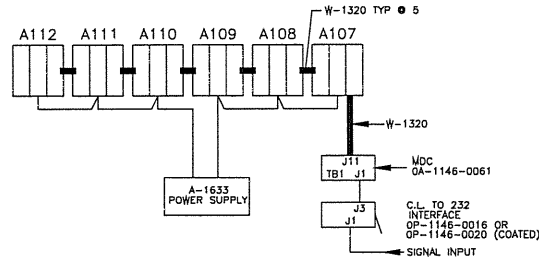

AS-4000
MASTER-MASTER
LAYOUT

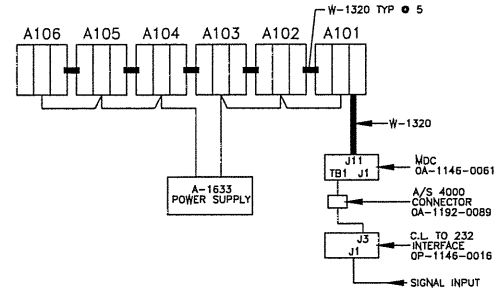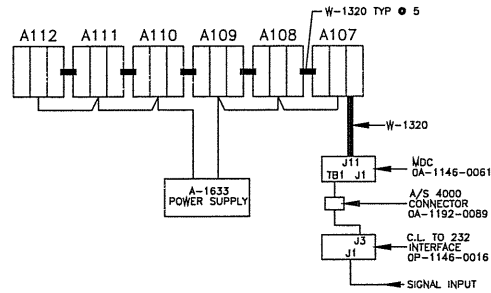

NOTE:

USE THE FOLLOWING POWER SUPPLY ASSEMBLY
OA-1213-4013 8X32 OR 8X48 TNMC P/S ASSY

USE THE FOLLOWING POWER/SIGNAL HARNESS
OA-1192-0068 OUTDOOR LED TNMC POWER/SIGNAL HARNESS (1 PER TNMC)
OA-1192-0073 MULTI-SECTION OUTDOOR LED TNMC HARNESS (USE W/ -0068)


USE THE FOLLOWING ADAPTER FOR A/S 4000 APPLICATIONS
OA-1192-0089 A/S 4000 CONNECTOR KIT

FOR BOTH A/S 5000 AND 4000 APPLICATIONS THE FOLLOWING DIP SWITCHES MUST BE SET ON THE BACK OF THE MDC FOR HOME AND GUEST:
HOME; S1 = ON
GUEST; S2 = ON


THE CONCEPTS EXPRESSED AND DETAILS SHOWN ON THIS DRAWING ARE CONFIDENTIAL AND PROPRIETARY. DO NOT REPRODUCE BY ANY MEANS, INCLUDING ELECTRONICALLY WITHOUT THE EXPRESSED WRITTEN CONSENT OF DAKTRONICS, INC. COPYRIGHT 2002 DAKTRONICS, INC.			
DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: CONTROL LAYOUT; OUTDOOR LED TNMC			
DES. BY: CBRECZI	DRAWN BY: CBRECZI		DATE: 22 DEC 00
REVISION	APPR. BY:	1192-E10B-107507	
	SCALE: 1=1		

01	24 JUN 02	ADDED OP-1146-0020 TO CL TO RS232 INTERFACE PART.	MWM	
REV.	DATE	DESCRIPTION	BY	APPR.


PLASTIC HOUSING WITH WEATHERSTRIPPING FOR WATERPROOFING

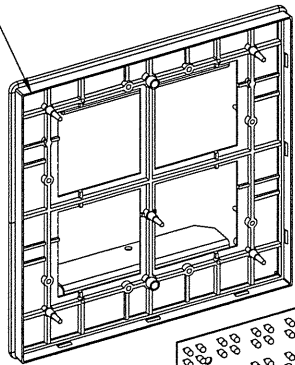

SINGLE LED AND DRIVER PANEL



LOUVER

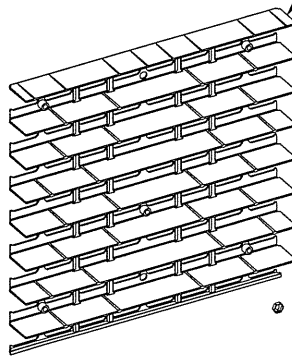

LATCH ACCESS PLUG #2 FOR FRONT AND REAR MODULE ACCESS AND WATERPROOFING



TWIST ON FASTENERS #5 FOR ATTACHMENT OF LOUVER

2


2

2

2

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ:	34MM OUTDOOR GALAXY
TITLE:	EXPLODED FRONT VIEW; SINGLE PANEL MODULE
DES. BY:	NANDAL
DRAWN BY:	DNUGTEREN
DATE:	10 JAN 00
REVISION	SHEET 1 OF DWG 126111
SCALE:	1=2
1208-E10B-126111	





REV.	DATE	DESCRIPTION	BY	APPR.

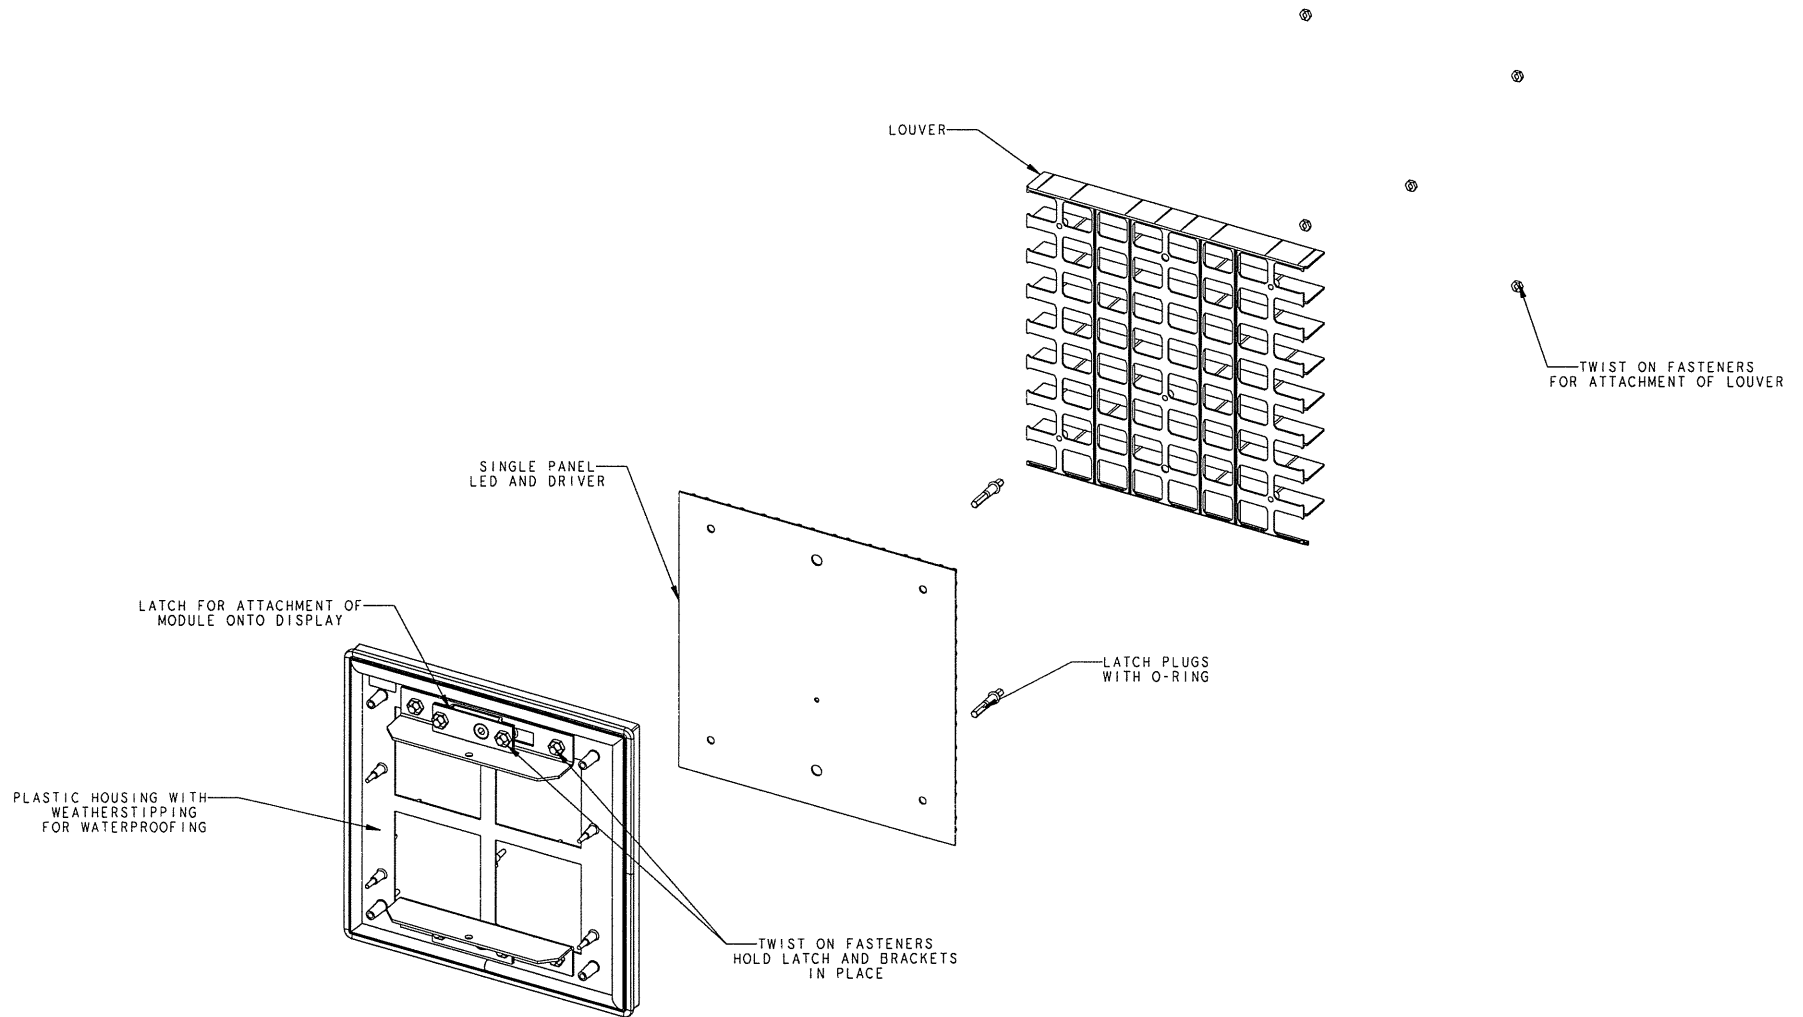

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ:	34MM OUTDOOR GALAXY
TITLE:	EXPLODED REAR VIEW; SINGLE PANEL MODULE
DES. BY:	NANDAL
DRAWN BY:	DNUGTEREN
DATE:	10 JAN 00
REVISION	SHEET 1 OF DWG 126112
SCALE:	1=2

REV.	DATE	DESCRIPTION	BY	APPR.

1208 - E10B - 126112

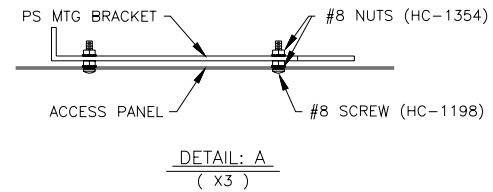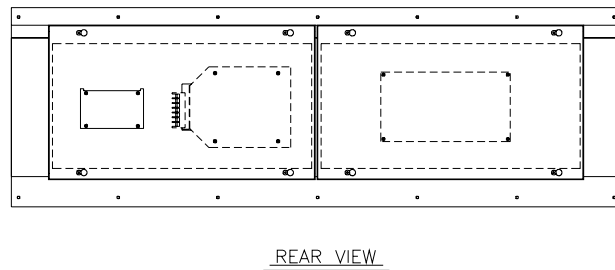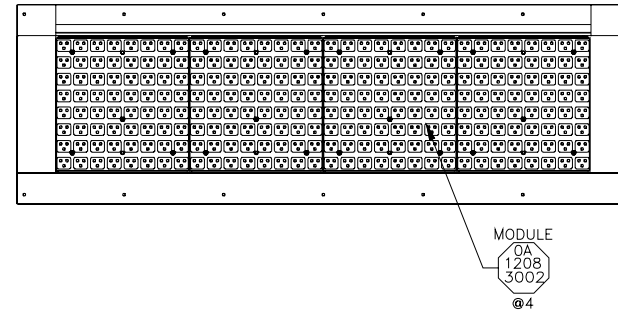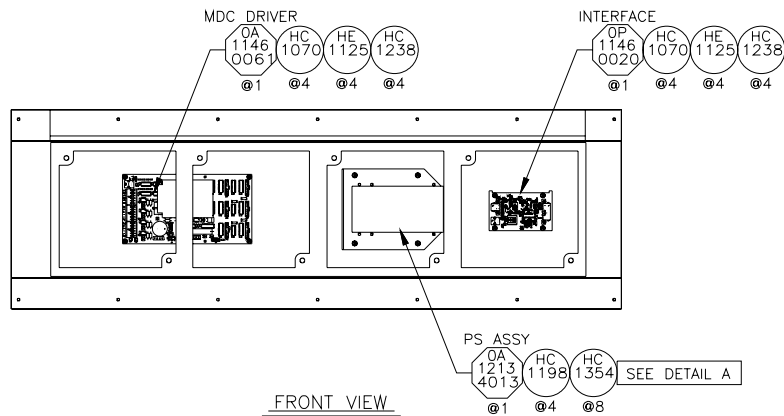

ASSEMBLY PACKET

OA-1192-1079.....F. ASSY; 832 LED TNMC, RED

DAKTRONICS, INC. BROOKINGS, SD 57006

PROJ: OUTDOOR LED SCOREBOARDS


TITLE: F. ASSY; 832 LED TNMC, RED

DES. BY: MCOPLAN DRAWN BY: MCOPLAN DATE: 15NOV01


REVISION APPR. BY: SCALE: 1=10

1192-E10B-159055


REV.	DATE	DESCRIPTION	BY	APPR.
01	26DEC01	INCREASED WIDTH OF ASSEMBLY	MCOPL	

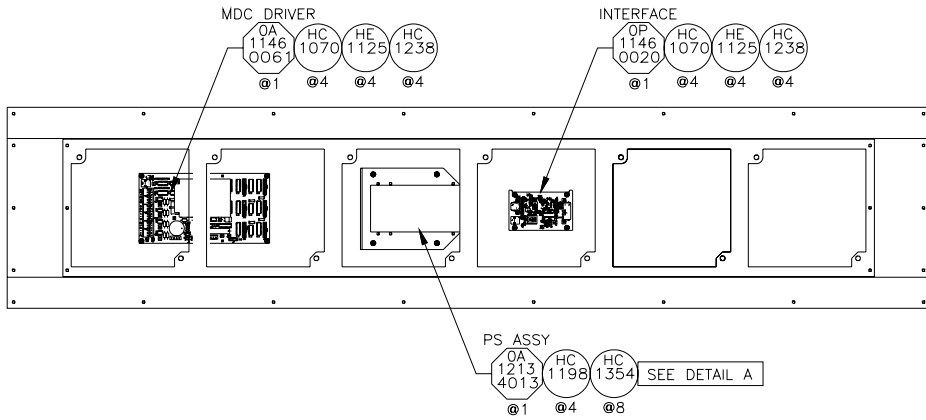


FRONT VIEW

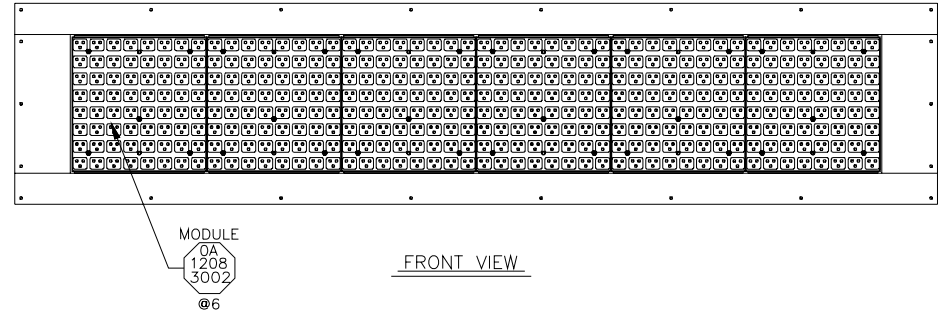

FRONT VIEW

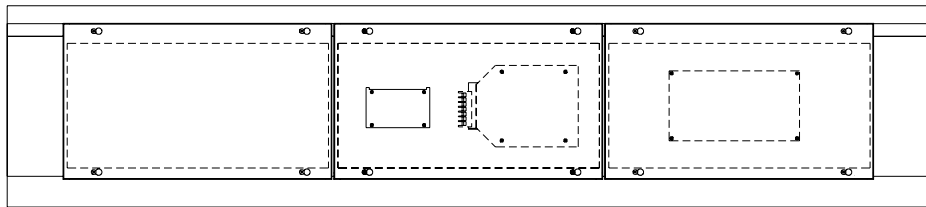

REAR VIEW

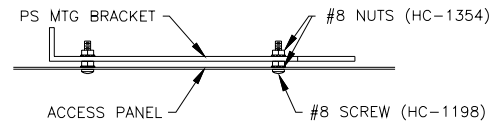


DETAIL: A
(X3)

ASSEMBLY PACKET

0A-1192-1080.....F. ASSY; 848 LED TNMC, RED


DAKTRONICS, INC. BROOKINGS, SD 57006			
PROJ: OUTDOOR LED SCOREBOARDS			
TITLE: F. ASSY; 848 LED TNMC, RED			
DES. BY: MCOPLAN	DRAWN BY: MCOPLAN	DATE: 15NOV01	
REVISION	APPR. BY:	1192-E10B-159081	
	SCALE: 1=10		

REV.	DATE	DESCRIPTION	BY	APPR.

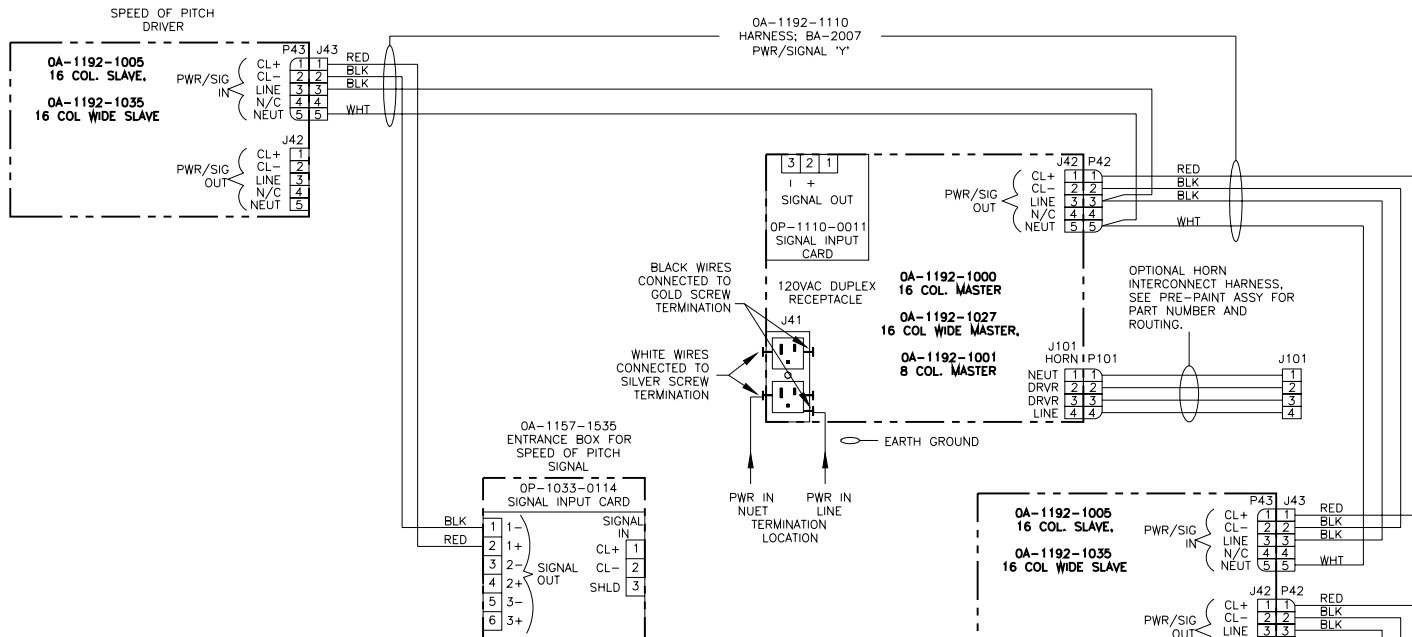

THIS SCHEMATIC REPRESENTS THE INTERCONNECT OF THE MASTER DRIVER TO OTHER DRIVERS/TNMC'S IN A MULTI DRIVER SCOREBOARD CONFIGURATION. SEE THE PRE-PAINT ASSEMBLY DRAWING AND/OR THE FINAL ASSEMBLY DRAWING FOR THE PART NUMBERS OF THE INTERCONNECT HARNESSES NEEDED AND INSTALLATION INSTRUCTIONS.

PWR/ SIGNAL INTERCONNECT HARNESSES BETWEEN SECTIONS. FOLLOW FINAL ASSY INSTRUCTIONS FOR ROUTING TO INTERCONNECT PANEL AND FOR ROUTING THROUGH NEXT SECTION.

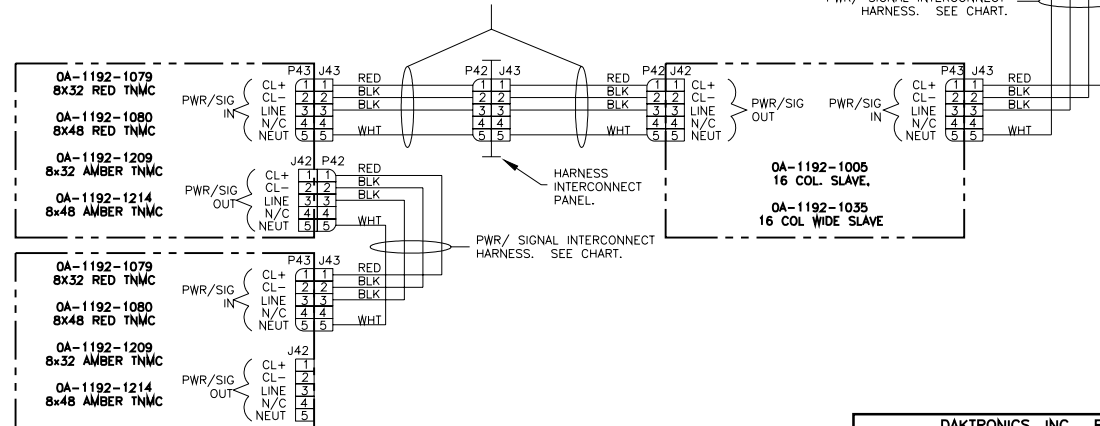

REV.	DATE	DESCRIPTION	BY	APPR.
02	20 MAY 02	REPLACED OP-1033-0114 WITH OP-1110-0011. ADDED AMBER TNMC AND REMOVED J101 FROM SLAVE DRIVERS.	THS	
01	22 JAN 02	ADDED WIRE CABLE COLORS	THS	

DAKTRONICS, INC. BROOKINGS, SD 57006	
PROJ: OUTDOOR LED DIGIT SCOREBOARDS	
TITLE: SCHEMATIC; GEN II, OD LED, BA-2007 /W TNMC	
DES. BY: MILLER	DRAWN BY: MILLER
DATE: 14 DEC 01	
REVISION	APPR. BY:
SCALE: 1=1	1192-R03B-160180


Appendix B: Eyebolts

EyeboltsED7244

Eyebolts




Almost every display that leaves Daktronics is equipped with eyebolts for lifting the display. There are two standard sizes of eyebolts: 1/2" and 5/8".


Load Increase Factor: The load increases as the lift angle (θ) decreases. The allowable load on the eyebolts also decreases with the lift angle due the bending stress on the eyebolts. In sum, the smaller the angle between the cable and the top of the display, the lighter the sign must be to safely lift it. *Do NOT attempt to lift the display when the lift angle is less than 30 degrees.*

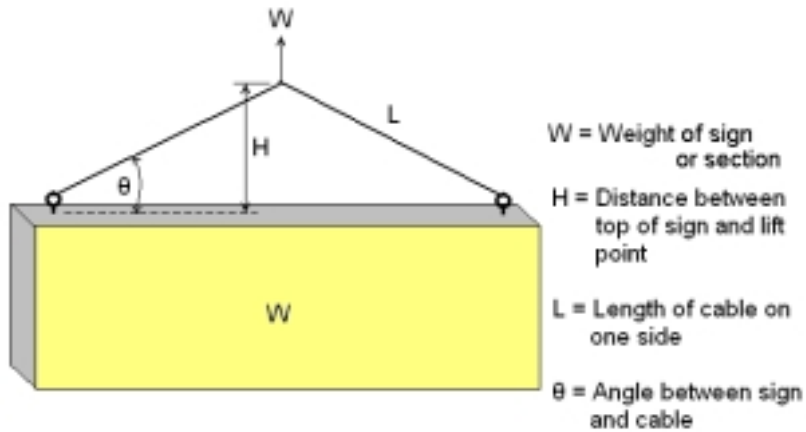

Horizontal Angle	Load Angle Factor (L/H)
90	1.00
60	1.155
50	1.305
45	1.414
30	2.00

θ	1/2"		5/8"	
	Line Load	Weight/Anchor	Line Load	Weight/Anchor
90	2600	2600	4000	4000
60	1500	1299	3300	2858
45	650	460	1000	707
30	520	260	800	400

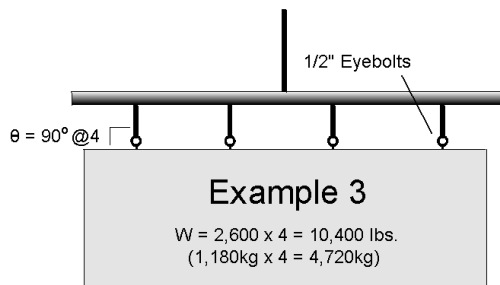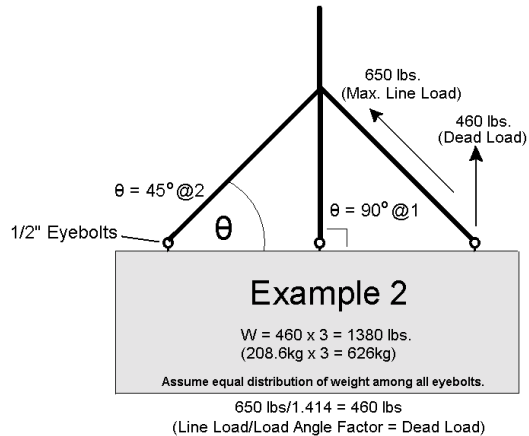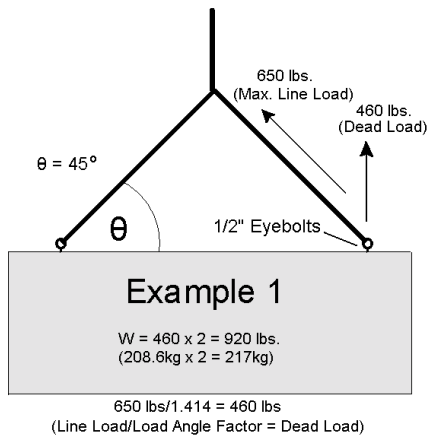

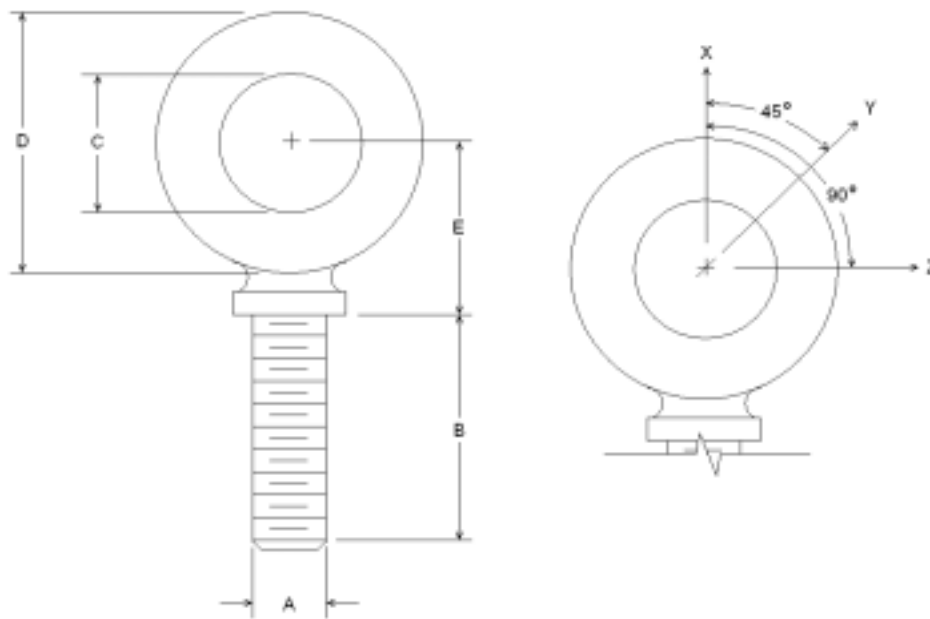

A	B	C	D	E	No.	Min. Proof Load (lbs.)	Min. Break Load (lbs.)	Stocked	Min. Eff. Thrd. Length	Line Loads		
										Wx	Wy	Wz
1/4	1	3/4	1-3/16	25/32	21	600	2,000	Blank 1/4-20	7/8	400	100	80
3/8	1-1/4	1	1-21/32	1-3/16	23	2,100	5,000	Blank 3/8-16	1-1/8	1,400	350	250
1/2	1-1/2	1-3/16	2-1/16	1-13/32	25	3,900	9,200	Blank 1/2-13	1-11/32	2,600	650	520
9/16	1-5/8	1-9/32	2-13/16	1-17/32	26	4,500	11,830	Blank 9/16-12	1-3/8	3,000	750	600
5/8	1-3/4	1-3/8	2-1/2	1-11/16	27	6,000	14,700	Blank 5/8-11	1-9/16	4,000	1,000	800
3/4	2	1-1/2	2-13/16	1-13/16	28	9,000	21,700	Blank 3/4-10	1-5/8	6,000	1,500	1,200
7/8	2-1/4	1-11/16	3-1/4	2-1/16	29	10,000	30,000	Blank 7/8-9	1-13/16	6,600	1,670	1,330
1	2-1/2	1-13/16	3-9/16	2-5/16	30	12,000	39,400	Blank 1-8	2-1/16	8,000	2,000	1,600
1-1/2	3-1/2	2-9/16	5-1/2	3-5/32	34	27,000	91,300	Blank 1-1/2-6	3	17,800	4,500	3,600

- A. Do not use eyebolts on angular lifts unless absolutely necessary. For angular lifts, the shoulder pattern eyebolt is preferred.
- B. Load should always be applied to eyebolts in the plane of the eye, not at some angle to this plane.
- C. Shoulder eyebolts must be properly seated (should bear firmly against the mating part), otherwise the working loads must be reduced to those indicated for regular eyebolts. A washer or spacer may be required to put the plane of the eye in the direction of the load when the shoulder is seated.
- D. No load greater than the safe working load listed in the data table should be used.
- E. To obtain the greatest strength from the eyebolt, it must fit reasonably tight in its mounting hole to prevent accidental unscrewing due to twist of cable.
- F. Eyebolts should never be painted or otherwise coated when used for lifting. Such coatings may cover potential flaws in the eyebolt.
- G. To attain the safe working loads listed for regular eyebolts, 90% of the thread length must be engaged.